

PriorHessian

Generated by Doxygen 1.8.11

## Contents

<b>1</b>	<b>Main Page</b>	<b>1</b>
<b>2</b>	<b>Namespace Index</b>	<b>4</b>
2.1	Namespace List . . . . .	4
<b>3</b>	<b>Hierarchical Index</b>	<b>4</b>
3.1	Class Hierarchy . . . . .	4
<b>4</b>	<b>Class Index</b>	<b>7</b>
4.1	Class List . . . . .	7
<b>5</b>	<b>File Index</b>	<b>9</b>
5.1	File List . . . . .	9
<b>6</b>	<b>Namespace Documentation</b>	<b>11</b>
6.1	prior_hessian Namespace Reference . . . . .	12
6.1.1	Typedef Documentation . . . . .	14
6.1.2	Function Documentation . . . . .	16
6.2	prior_hessian::constants Namespace Reference . . . . .	29
6.2.1	Variable Documentation . . . . .	29
6.3	prior_hessian::CopulaDistImpl Namespace Reference . . . . .	29
6.4	prior_hessian::detail Namespace Reference . . . . .	30
6.4.1	Typedef Documentation . . . . .	30
6.4.2	Function Documentation . . . . .	30
6.5	prior_hessian::genz Namespace Reference . . . . .	32
6.5.1	Function Documentation . . . . .	32
6.6	prior_hessian::genz::fortran Namespace Reference . . . . .	33
6.6.1	Function Documentation . . . . .	33
6.7	prior_hessian::helpers Namespace Reference . . . . .	33
6.7.1	Function Documentation . . . . .	33
6.8	prior_hessian::mcmc Namespace Reference . . . . .	34
6.9	prior_hessian::meta Namespace Reference . . . . .	34
6.9.1	Detailed Description . . . . .	36
6.9.2	Typedef Documentation . . . . .	37
6.9.3	Function Documentation . . . . .	40
6.10	prior_hessian::polylog Namespace Reference . . . . .	43
6.10.1	Function Documentation . . . . .	43

---

<b>7</b>	<b>Class Documentation</b>	<b>45</b>
7.1	<a href="#">prior_hessian::meta::all_dists_are_bounded&lt; DistTs &gt; Struct Template Reference</a>	45
7.1.1	<a href="#">Detailed Description</a>	46
7.1.2	<a href="#">Member Data Documentation</a>	46
7.2	<a href="#">prior_hessian::AMHCopula&lt; Ndim &gt; Class Template Reference</a>	46
7.2.1	<a href="#">Detailed Description</a>	48
7.2.2	<a href="#">Member Typedef Documentation</a>	48
7.2.3	<a href="#">Constructor &amp; Destructor Documentation</a>	49
7.2.4	<a href="#">Member Function Documentation</a>	49
7.3	<a href="#">prior_hessian::ArchimedeanCopula Class Reference</a>	65
7.3.1	<a href="#">Detailed Description</a>	66
7.4	<a href="#">prior_hessian::BaseDist Class Reference</a>	66
7.4.1	<a href="#">Detailed Description</a>	66
7.5	<a href="#">prior_hessian::CompositeDist::ComponentDistAdaptor&lt; Dist, meta::EnableIfSubclassT&lt; Dist, MultivariateDist &gt; &gt; Class Template Reference</a>	67
7.5.1	<a href="#">Detailed Description</a>	68
7.5.2	<a href="#">Member Typedef Documentation</a>	69
7.5.3	<a href="#">Constructor &amp; Destructor Documentation</a>	69
7.5.4	<a href="#">Member Function Documentation</a>	69
7.6	<a href="#">prior_hessian::CompositeDist::ComponentDistAdaptor&lt; Dist, meta::EnableIfSubclassT&lt; Dist, UnivariateDist &gt; &gt; Class Template Reference</a>	78
7.6.1	<a href="#">Detailed Description</a>	79
7.6.2	<a href="#">Member Typedef Documentation</a>	80
7.6.3	<a href="#">Constructor &amp; Destructor Documentation</a>	80
7.6.4	<a href="#">Member Function Documentation</a>	80
7.7	<a href="#">prior_hessian::CompositeDist Class Reference</a>	89
7.7.1	<a href="#">Detailed Description</a>	92
7.7.2	<a href="#">Class Documentation</a>	92
7.7.3	<a href="#">Member Typedef Documentation</a>	93

7.7.4	Constructor & Destructor Documentation	93
7.7.5	Member Function Documentation	95
7.8	prior_hessian::meta::conjunction<... > Struct Template Reference	134
7.8.1	Detailed Description	134
7.9	prior_hessian::meta::conjunction< B1 > Struct Template Reference	135
7.9.1	Detailed Description	135
7.10	prior_hessian::meta::conjunction< B1, Bn... > Struct Template Reference	136
7.10.1	Detailed Description	136
7.11	prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs > Class Template Reference	137
7.11.1	Detailed Description	139
7.11.2	Member Typedef Documentation	139
7.11.3	Constructor & Destructor Documentation	140
7.11.4	Member Function Documentation	141
7.12	prior_hessian::ArchimedeanCopula::D2_GenTerms Struct Reference	159
7.12.1	Detailed Description	160
7.12.2	Member Data Documentation	161
7.13	prior_hessian::ArchimedeanCopula::D2_IGenTerms Struct Reference	161
7.13.1	Detailed Description	162
7.13.2	Member Data Documentation	162
7.14	prior_hessian::ArchimedeanCopula::D2Theta_GenTerms Struct Reference	163
7.14.1	Detailed Description	164
7.14.2	Member Data Documentation	164
7.15	prior_hessian::ArchimedeanCopula::D2Theta_IGenTerms Struct Reference	164
7.15.1	Detailed Description	165
7.15.2	Member Data Documentation	165
7.16	prior_hessian::ArchimedeanCopula::D_GenTerms Struct Reference	166
7.16.1	Detailed Description	166

---

7.16.2	Member Data Documentation	166
7.17	prior_hessian::ArchimedeanCopula::D_IGenTerms Struct Reference	167
7.17.1	Detailed Description	167
7.17.2	Member Data Documentation	167
7.18	prior_hessian::meta::disjunction<... > Struct Template Reference	168
7.18.1	Detailed Description	169
7.19	prior_hessian::meta::disjunction< B1 > Struct Template Reference	169
7.19.1	Detailed Description	170
7.20	prior_hessian::meta::disjunction< B1, Bn... > Struct Template Reference	170
7.20.1	Detailed Description	171
7.21	prior_hessian::detail::dist_adaptor_traits< Dist > Class Template Reference	171
7.21.1	Detailed Description	171
7.21.2	Member Typedef Documentation	171
7.21.3	Member Data Documentation	172
7.22	prior_hessian::detail::dist_adaptor_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > > Struct Template Reference	172
7.22.1	Detailed Description	172
7.22.2	Member Typedef Documentation	172
7.22.3	Member Data Documentation	173
7.23	prior_hessian::detail::dist_adaptor_traits< GammaDist > Struct Template Reference	173
7.23.1	Detailed Description	173
7.23.2	Member Typedef Documentation	173
7.23.3	Member Data Documentation	174
7.24	prior_hessian::detail::dist_adaptor_traits< MultivariateNormalDist< Ndim > > Struct Template Reference	174
7.24.1	Detailed Description	174
7.24.2	Member Typedef Documentation	174
7.24.3	Member Data Documentation	175
7.25	prior_hessian::detail::dist_adaptor_traits< NormalDist > Struct Template Reference	175

---

7.25.1	Detailed Description	175
7.25.2	Member Typedef Documentation	175
7.25.3	Member Data Documentation	176
7.26	prior_hessian::detail::dist_adaptor_traits< ParetoDist > Struct Template Reference	176
7.26.1	Detailed Description	176
7.26.2	Member Typedef Documentation	176
7.26.3	Member Data Documentation	177
7.27	prior_hessian::detail::dist_adaptor_traits< ScaledSymmetricBetaDist > Struct Template Reference	177
7.27.1	Detailed Description	177
7.27.2	Member Typedef Documentation	177
7.27.3	Member Data Documentation	178
7.28	prior_hessian::detail::dist_adaptor_traits< SymmetricBetaDist > Struct Template Reference	178
7.28.1	Detailed Description	178
7.28.2	Member Typedef Documentation	178
7.28.3	Member Data Documentation	179
7.29	prior_hessian::detail::dist_adaptor_traits< TruncatedGammaDist > Struct Template Reference	179
7.29.1	Detailed Description	179
7.29.2	Member Typedef Documentation	179
7.29.3	Member Data Documentation	180
7.30	prior_hessian::detail::dist_adaptor_traits< TruncatedMultivariateNormalDist< Ndim > > Struct Template Reference	180
7.30.1	Detailed Description	180
7.30.2	Member Typedef Documentation	180
7.30.3	Member Data Documentation	181
7.31	prior_hessian::detail::dist_adaptor_traits< TruncatedNormalDist > Struct Template Reference	181
7.31.1	Detailed Description	181
7.31.2	Member Typedef Documentation	181
7.31.3	Member Data Documentation	182

7.32	<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; TruncatedParetoDist &gt; Struct Template Reference</a>	182
7.32.1	<a href="#">Detailed Description</a>	182
7.32.2	<a href="#">Member Typedef Documentation</a>	182
7.32.3	<a href="#">Member Data Documentation</a>	183
7.33	<a href="#">prior_hessian::ArchimedeanCopula::DTheta_GenTerms Struct Reference</a>	183
7.33.1	<a href="#">Detailed Description</a>	183
7.33.2	<a href="#">Member Data Documentation</a>	183
7.34	<a href="#">prior_hessian::ArchimedeanCopula::DTheta_IGenTerms Struct Reference</a>	184
7.34.1	<a href="#">Detailed Description</a>	184
7.34.2	<a href="#">Member Data Documentation</a>	184
7.35	<a href="#">prior_hessian::eulerian_number&lt; N, M &gt; Struct Template Reference</a>	185
7.35.1	<a href="#">Detailed Description</a>	186
7.36	<a href="#">prior_hessian::eulerian_number&lt; 0, M &gt; Struct Template Reference</a>	186
7.36.1	<a href="#">Detailed Description</a>	187
7.37	<a href="#">prior_hessian::GammaDist Class Reference</a>	187
7.37.1	<a href="#">Detailed Description</a>	189
7.37.2	<a href="#">Member Typedef Documentation</a>	189
7.37.3	<a href="#">Constructor &amp; Destructor Documentation</a>	189
7.37.4	<a href="#">Member Function Documentation</a>	190
7.38	<a href="#">prior_hessian::IndexError Struct Reference</a>	205
7.38.1	<a href="#">Detailed Description</a>	206
7.38.2	<a href="#">Constructor &amp; Destructor Documentation</a>	207
7.38.3	<a href="#">Member Function Documentation</a>	207
7.38.4	<a href="#">Member Data Documentation</a>	207
7.39	<a href="#">prior_hessian::InvalidOperationError Struct Reference</a>	208
7.39.1	<a href="#">Detailed Description</a>	209
7.39.2	<a href="#">Constructor &amp; Destructor Documentation</a>	209
7.39.3	<a href="#">Member Function Documentation</a>	210

7.39.4	Member Data Documentation	210
7.40	prior_hessian::meta::is_copula< T, U > Class Template Reference	210
7.40.1	Detailed Description	210
7.40.2	Member Data Documentation	211
7.41	prior_hessian::meta::is_numeric_template_of< class, typename > Struct Template Reference	211
7.41.1	Detailed Description	212
7.42	prior_hessian::meta::is_numeric_template_of< ClassNumericTemplate, ClassNumericTemplate< Is... > > Struct Template Reference	212
7.42.1	Detailed Description	213
7.43	prior_hessian::meta::is_subclass_of_numeric_template< T, U > Class Template Reference	213
7.43.1	Detailed Description	213
7.43.2	Member Data Documentation	214
7.44	prior_hessian::meta::is_template_of< class, typename > Struct Template Reference	214
7.44.1	Detailed Description	215
7.45	prior_hessian::meta::is_template_of< ClassTemplate, ClassTemplate< Ts... > > Struct Template Reference	215
7.45.1	Detailed Description	216
7.46	prior_hessian::mcmc::MCMCData< Ndim > Class Template Reference	216
7.46.1	Detailed Description	217
7.46.2	Member Typedef Documentation	217
7.46.3	Constructor & Destructor Documentation	217
7.46.4	Member Function Documentation	217
7.46.5	Member Data Documentation	218
7.47	prior_hessian::MultivariateDist Class Reference	218
7.47.1	Detailed Description	219
7.47.2	Constructor & Destructor Documentation	219
7.47.3	Member Function Documentation	219
7.48	prior_hessian::MultivariateNormalDist< Ndim > Class Template Reference	220
7.48.1	Detailed Description	222



---

7.48.2	Member Typedef Documentation	222
7.48.3	Constructor & Destructor Documentation	223
7.48.4	Member Function Documentation	224
7.49	prior_hessian::NormalDist Class Reference	248
7.49.1	Detailed Description	250
7.49.2	Member Typedef Documentation	250
7.49.3	Constructor & Destructor Documentation	251
7.49.4	Member Function Documentation	252
7.50	prior_hessian::NotImplementedError Struct Reference	272
7.50.1	Detailed Description	273
7.50.2	Constructor & Destructor Documentation	273
7.50.3	Member Function Documentation	274
7.50.4	Member Data Documentation	274
7.51	prior_hessian::NumericalOverflowError Struct Reference	274
7.51.1	Detailed Description	275
7.51.2	Constructor & Destructor Documentation	275
7.51.3	Member Function Documentation	276
7.51.4	Member Data Documentation	276
7.52	prior_hessian::ParameterNameError Struct Reference	276
7.52.1	Detailed Description	277
7.52.2	Constructor & Destructor Documentation	277
7.52.3	Member Function Documentation	278
7.52.4	Member Data Documentation	278
7.53	prior_hessian::ParameterNameUniquenessError Struct Reference	278
7.53.1	Detailed Description	279
7.53.2	Constructor & Destructor Documentation	279
7.53.3	Member Function Documentation	280
7.53.4	Member Data Documentation	280

---

7.54	<a href="#">prior_hessian::ParameterSizeError Struct Reference</a>	280
7.54.1	<a href="#">Detailed Description</a>	281
7.54.2	<a href="#">Constructor &amp; Destructor Documentation</a>	281
7.54.3	<a href="#">Member Function Documentation</a>	282
7.54.4	<a href="#">Member Data Documentation</a>	282
7.55	<a href="#">prior_hessian::ParameterValueError Struct Reference</a>	282
7.55.1	<a href="#">Detailed Description</a>	283
7.55.2	<a href="#">Constructor &amp; Destructor Documentation</a>	283
7.55.3	<a href="#">Member Function Documentation</a>	284
7.55.4	<a href="#">Member Data Documentation</a>	284
7.56	<a href="#">prior_hessian::ParetoDist Class Reference</a>	284
7.56.1	<a href="#">Detailed Description</a>	286
7.56.2	<a href="#">Member Typedef Documentation</a>	286
7.56.3	<a href="#">Constructor &amp; Destructor Documentation</a>	287
7.56.4	<a href="#">Member Function Documentation</a>	287
7.57	<a href="#">prior_hessian::PriorHessianError Class Reference</a>	319
7.57.1	<a href="#">Detailed Description</a>	320
7.57.2	<a href="#">Constructor &amp; Destructor Documentation</a>	320
7.57.3	<a href="#">Member Function Documentation</a>	321
7.57.4	<a href="#">Member Data Documentation</a>	321
7.58	<a href="#">prior_hessian::RuntimeConvergenceError Struct Reference</a>	321
7.58.1	<a href="#">Detailed Description</a>	322
7.58.2	<a href="#">Constructor &amp; Destructor Documentation</a>	322
7.58.3	<a href="#">Member Function Documentation</a>	323
7.58.4	<a href="#">Member Data Documentation</a>	323
7.59	<a href="#">prior_hessian::RuntimeSamplingError Struct Reference</a>	323
7.59.1	<a href="#">Detailed Description</a>	324
7.59.2	<a href="#">Constructor &amp; Destructor Documentation</a>	324

---

7.59.3	Member Function Documentation	325
7.59.4	Member Data Documentation	325
7.60	prior_hessian::RuntimeTypeError Struct Reference	325
7.60.1	Detailed Description	326
7.60.2	Constructor & Destructor Documentation	326
7.60.3	Member Function Documentation	327
7.60.4	Member Data Documentation	327
7.61	prior_hessian::ScaledDist< Dist > Class Template Reference	327
7.61.1	Detailed Description	329
7.61.2	Constructor & Destructor Documentation	329
7.61.3	Member Function Documentation	331
7.61.4	Member Data Documentation	343
7.62	prior_hessian::SymmetricBetaDist Class Reference	344
7.62.1	Detailed Description	346
7.62.2	Member Typedef Documentation	346
7.62.3	Constructor & Destructor Documentation	346
7.62.4	Member Function Documentation	347
7.63	prior_hessian::TruncatedDist< Dist > Class Template Reference	361
7.63.1	Detailed Description	363
7.63.2	Constructor & Destructor Documentation	363
7.63.3	Member Function Documentation	366
7.63.4	Member Data Documentation	375
7.64	prior_hessian::TruncatedMultivariateDist< Dist > Class Template Reference	377
7.64.1	Detailed Description	379
7.64.2	Constructor & Destructor Documentation	379
7.64.3	Member Function Documentation	379
7.64.4	Member Data Documentation	381
7.65	prior_hessian::UnivariateDist Class Reference	383
7.65.1	Detailed Description	384
7.65.2	Constructor & Destructor Documentation	384
7.65.3	Member Function Documentation	384
7.66	prior_hessian::UpperTruncatedDist< Dist > Class Template Reference	385
7.66.1	Detailed Description	386
7.66.2	Constructor & Destructor Documentation	386
7.66.3	Member Function Documentation	388

---

<b>8 File Documentation</b>	<b>395</b>
8.1 AMHCopula.h File Reference	395
8.1.1 Detailed Description	395
8.2 ArchimedeanCopula.h File Reference	396
8.2.1 Detailed Description	397
8.3 BaseDist.h File Reference	397
8.3.1 Detailed Description	397
8.4 BoundsAdaptedDist.h File Reference	398
8.4.1 Detailed Description	399
8.5 CompositeDist.cpp File Reference	400
8.5.1 Detailed Description	401
8.6 CompositeDist.h File Reference	401
8.6.1 Detailed Description	402
8.6.2 Class Documentation	403
8.7 copula.h File Reference	403
8.7.1 Detailed Description	403
8.8 CopulaDist.h File Reference	404
8.8.1 Detailed Description	405
8.9 EulerianPolynomial.h File Reference	405
8.9.1 Detailed Description	406
8.10 GammaDist.cpp File Reference	406
8.10.1 Detailed Description	407
8.11 GammaDist.h File Reference	407
8.11.1 Detailed Description	408
8.12 Meta.h File Reference	408
8.12.1 Detailed Description	411
8.12.2 Macro Definition Documentation	411
8.13 MultivariateDist.h File Reference	412

---

---

8.13.1 Detailed Description . . . . .	413
8.14 MultivariateNormalDist.h File Reference . . . . .	413
8.14.1 Detailed Description . . . . .	414
8.15 mvn_cdf.cpp File Reference . . . . .	414
8.15.1 Detailed Description . . . . .	415
8.16 mvn_cdf.h File Reference . . . . .	415
8.16.1 Detailed Description . . . . .	417
8.17 NormalDist.cpp File Reference . . . . .	417
8.17.1 Detailed Description . . . . .	417
8.18 NormalDist.h File Reference . . . . .	418
8.18.1 Detailed Description . . . . .	419
8.19 ParetoDist.cpp File Reference . . . . .	419
8.19.1 Detailed Description . . . . .	419
8.20 ParetoDist.h File Reference . . . . .	420
8.20.1 Detailed Description . . . . .	421
8.21 PolyLog.h File Reference . . . . .	421
8.21.1 Detailed Description . . . . .	422
8.22 PriorHessianError.h File Reference . . . . .	422
8.22.1 Detailed Description . . . . .	423
8.22.2 Macro Definition Documentation . . . . .	424
8.23 README.md File Reference . . . . .	424
8.24 ScaledDist.h File Reference . . . . .	424
8.24.1 Detailed Description . . . . .	425
8.25 ScaledSymmetricBetaDist.h File Reference . . . . .	425
8.25.1 Detailed Description . . . . .	426
8.26 SymmetricBetaDist.cpp File Reference . . . . .	426
8.26.1 Detailed Description . . . . .	427
8.27 SymmetricBetaDist.h File Reference . . . . .	427

8.27.1 Detailed Description	428
8.28 TruncatedDist.h File Reference	429
8.28.1 Detailed Description	430
8.29 TruncatedGammaDist.h File Reference	430
8.29.1 Detailed Description	431
8.30 TruncatedMultivariateDist.h File Reference	431
8.30.1 Detailed Description	432
8.31 TruncatedMultivariateNormalDist.h File Reference	433
8.31.1 Detailed Description	434
8.32 TruncatedNormalDist.h File Reference	434
8.32.1 Detailed Description	435
8.33 TruncatedParetoDist.h File Reference	435
8.33.1 Detailed Description	436
8.34 UnivariateDist.cpp File Reference	436
8.34.1 Detailed Description	437
8.35 UnivariateDist.h File Reference	437
8.35.1 Detailed Description	438
8.36 UpperTruncatedDist.h File Reference	438
8.36.1 Detailed Description	439
8.37 util.cpp File Reference	439
8.37.1 Detailed Description	440
8.38 util.h File Reference	441
8.38.1 Detailed Description	442

**Index****443****1 Main Page**

## Prior Hessian

Library for fast computation of log-likelihoods and derivatives of multivariate priors defined as composites of univariate multivariate distributions especially designed for support of Archimedean copulas.

### Documentation

The PriorHessian Doxygen documentation can be build with the `OPT_DOC` CMake option and is also available on online:

- [PriorHessian HTML Manual](#)
- [PriorHessian PDF Manual](#)
- [PriorHessian github repository](#)

### Installation

The PriorHessian library uses CMake and is designed to be installed either as a native package, or as a relocatable package in an arbitrary install prefix. The default build script will install to the `_install` directory underneath the repository root.

- **Default release build script**

- builds to `{BUILD_PATH}` if set or default of: `{CMAKE_SOURCE_DIR}\_build\Release`
  - installs to `{INSTALL_PATH}` if set or default of: `{CMAKE_SOURCE_DIR}\_install`
- ```
1 $ ./build.sh <cmake-extra-opts>
```

- **Default Debug build script**

- builds to `{BUILD_PATH}` if set or default of: `{CMAKE_SOURCE_DIR}\_build\Debug`
  - installs to `{INSTALL_PATH}` if set or default of: `{CMAKE_SOURCE_DIR}\_install`
- ```
1 $ ./build.debug.sh <cmake-extra-opts>
```

- **Manual CMake Build**

```
1 $ cmake -H. -B<build-path> -DCMAKE_INSTALL_PREFIX=<install-path> -DCMAKE_BUILD_TYPE=Release
  <other-cmake-args>
2 $ cd <build-path> && make -j<num-procs> install
```

### Dependencies

- [Armadillo](#) - A high-performance array library for C++.
- [BLAS](#) - A BLAS implementation: [Netlib BLAS reference](#) or [OpenBlas](#)
- [LAPACK](#) - A Lapack implementation: [Netlib LAPACK reference](#)

Note the `OPT_BLAS_INT64` CMake option controls whether Armadillo uses BLAS and LAPACK libraries that use 64-bit interger indexing. Matlab uses 64-bit by default, and to link PriorHessian to Matlab MEX libraries, this option must be on. Many linux systems only provide 32-bit integer versions of BLAS and Lapack, and the option can be disabled if Matlab support is not a concern and 64-bit support is difficult to manage on

## CMake Options

### Standard options

- `BUILD_SHARED_LIBS` - Build shared libraries [Default: On]
- `BUILD_STATIC_LIBS` - Build static libraries [Default: On]
- `BUILD_TESTING` - Build tests [Default: On if `CMAKE_BUILD_TYPE=Debug`]
- `OPT_INSTALL_TESTING` - Install tests. [Default: Off]
- `OPT_DOC` - Build and install documentation (enables `make doc` and `make pdf`) [Default: Off]
- `OPT_EXPORT_BUILD_TREE` - Enable CMake export and `find_package(BacktraceException)` support from the build-tree.

### Dependency options

- `OPT_BLAS_INT64` - Enable 64-bit integer BLAS library support [Default: Off]

### External Projects

These packages are specialized CMake projects. If they are not currently installed on the development machines we use the `AddExternalDependency.cmake` which will automatically download, configure, build and install to the `CMAKE_INSTALL_PREFIX`, enabling their use through the normal CMake `find_package()` system.

- `BacktraceException` - For exception backtraces when debugging (especially in Matlab).

### Motivation

For many likelihood-based methods, they can be extended to Bayesian methods like MAP Estimation and MCMC Posterior sampling, by incorporating a prior. This prior must provide fast methods for computing log-likelihood and its derivatives over the parameter space. The prior log-likelihood, as well as its gradient and hessian are then added to the equivalent quantities from the likelihood to create a Bayesian objective for MAP Estimation.

### Static Polymorphism

The `PriorHessian` library is designed using static polymorphism (templates), and as such avoids virtual functions for small-grained tasks, and instead uses templates, which allow many small functions to be inlined. This aggressive inlining by the compiler produces log-likelihood, gradient, and hessian functions that are nearly as fast as hand-coded functions. But our flexible `[CompositeDist]()` class is able to be easily created with any mix of `[UnivariateDist]()` and `[MultivariateDist]()` elements.

In `Mappel` we use this ability to create heterogeneous priors for each Model's parameters, (e.g., `[x,y,l,bg,sigma]`).

Functionally, the `PriorHessian` library stores sequences of distributions as `std::tuples`. Using this approach as opposed to the runtime polymorphism of using `std::vector<std::unique_ptr<Base>>` gains several advantages. Most importantly, without the need for virtual functions, the tuple-based approach has the ability to inline the many small computational functions that must be combined for every call to compute the log-likelihood or other computationally important quantities.



## 2 Namespace Index

### 2.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<a href="#">prior_hessian</a>	12
<a href="#">prior_hessian::constants</a>	29
<a href="#">prior_hessian::CopulaDistImpl</a>	29
<a href="#">prior_hessian::detail</a>	30
<a href="#">prior_hessian::genz</a>	32
<a href="#">prior_hessian::genz::fortran</a>	33
<a href="#">prior_hessian::helpers</a>	33
<a href="#">prior_hessian::mcmc</a>	34
<a href="#">prior_hessian::meta</a>	34
Class templates to utilize sequencing behavior of <code>std::initializer_list</code> expressions	34
<a href="#">prior_hessian::polylog</a>	43

## 3 Hierarchical Index

### 3.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

<a href="#">prior_hessian::meta::all_dists_are_bounded&lt; DistTs &gt;</a>	45
<a href="#">prior_hessian::ArchimedeanCopula</a>	65
<a href="#">prior_hessian::AMHCopula&lt; Ndim &gt;</a>	46
B1	
<a href="#">prior_hessian::meta::conjunction&lt; B1 &gt;</a>	135
<a href="#">prior_hessian::meta::disjunction&lt; B1 &gt;</a>	169
<a href="#">prior_hessian::BaseDist</a>	66
<a href="#">prior_hessian::MultivariateDist</a>	218
<a href="#">prior_hessian::CopulaDistImpl::CopulaDist&lt; CopulaTemplate, MarginalDistTs &gt;</a>	137
<a href="#">prior_hessian::MultivariateNormalDist&lt; Ndim &gt;</a>	220

prior_hessian::UnivariateDist	383
prior_hessian::GammaDist	187
prior_hessian::NormalDist	248
prior_hessian::ParetoDist	284
prior_hessian::SymmetricBetaDist	344
prior_hessian::CompositeDist::ComponentDistAdaptor< DistT, Enable >	89
prior_hessian::CompositeDist	89
conditional_t	
prior_hessian::meta::conjunction< B1, Bn... >	136
prior_hessian::meta::disjunction< B1, Bn... >	170
prior_hessian::ArchimedeanCopula::D_GenTerms	166
prior_hessian::ArchimedeanCopula::D2_GenTerms	159
prior_hessian::ArchimedeanCopula::D_IGenTerms	167
prior_hessian::ArchimedeanCopula::D2_IGenTerms	161
Dist	
prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >	67
prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >	78
prior_hessian::ScaledDist< Dist >	327
prior_hessian::TruncatedDist< Dist >	361
prior_hessian::TruncatedMultivariateDist< Dist >	377
prior_hessian::UpperTruncatedDist< Dist >	385
prior_hessian::detail::dist_adaptor_traits< Dist >	171
prior_hessian::detail::dist_adaptor_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > >	172
prior_hessian::detail::dist_adaptor_traits< GammaDist >	173
prior_hessian::detail::dist_adaptor_traits< MultivariateNormalDist< Ndim > >	174
prior_hessian::detail::dist_adaptor_traits< NormalDist >	175
prior_hessian::detail::dist_adaptor_traits< ParetoDist >	176
prior_hessian::detail::dist_adaptor_traits< ScaledSymmetricBetaDist >	177
prior_hessian::detail::dist_adaptor_traits< SymmetricBetaDist >	178

<code>prior_hessian::detail::dist_adaptor_traits&lt; TruncatedGammaDist &gt;</code>	179
<code>prior_hessian::detail::dist_adaptor_traits&lt; TruncatedMultivariateNormalDist&lt; Ndim &gt; &gt;</code>	180
<code>prior_hessian::detail::dist_adaptor_traits&lt; TruncatedNormalDist &gt;</code>	181
<code>prior_hessian::detail::dist_adaptor_traits&lt; TruncatedParetoDist &gt;</code>	182
<code>prior_hessian::ArchimedeanCopula::DTheta_GenTerms</code>	183
<code>prior_hessian::ArchimedeanCopula::D2Theta_GenTerms</code>	163
<code>prior_hessian::ArchimedeanCopula::DTheta_IGenTerms</code>	184
<code>prior_hessian::ArchimedeanCopula::D2Theta_IGenTerms</code>	164
<code>std::exception</code>	
<code>prior_hessian::PriorHessianError</code>	319
<code>prior_hessian::IndexError</code>	205
<code>prior_hessian::InvalidOperationError</code>	208
<code>prior_hessian::NotImplementedError</code>	272
<code>prior_hessian::NumericalOverflowError</code>	274
<code>prior_hessian::ParameterNameError</code>	276
<code>prior_hessian::ParameterNameUniquenessError</code>	278
<code>prior_hessian::ParameterSizeError</code>	280
<code>prior_hessian::ParameterValueError</code>	282
<code>prior_hessian::RuntimeConvergenceError</code>	321
<code>prior_hessian::RuntimeSamplingError</code>	323
<code>prior_hessian::RuntimeTypeError</code>	325
<code>false_type</code>	
<code>prior_hessian::meta::is_numeric_template_of&lt; class, typename &gt;</code>	211
<code>prior_hessian::meta::is_template_of&lt; class, typename &gt;</code>	214
<code>integral_constant</code>	
<code>prior_hessian::eulerian_number&lt; N, M &gt;</code>	185
<code>prior_hessian::eulerian_number&lt; 0, M &gt;</code>	186
<code>prior_hessian::meta::is_copula&lt; T, U &gt;</code>	210
<code>prior_hessian::meta::is_subclass_of_numeric_template&lt; T, U &gt;</code>	213
<code>prior_hessian::mcmc::MCMCData&lt; Ndim &gt;</code>	216

<a href="#">prior_hessian::mcmc::MCMCData&lt; Dist::num_dim()&gt;</a>	216
<a href="#">true_type</a>	
<a href="#">prior_hessian::meta::conjunction&lt;... &gt;</a>	134
<a href="#">prior_hessian::meta::disjunction&lt;... &gt;</a>	168
<a href="#">prior_hessian::meta::is_numeric_template_of&lt; ClassNumericTemplate, ClassNumericTemplate&lt; Is... &gt; &gt;</a>	212
<a href="#">prior_hessian::meta::is_template_of&lt; ClassTemplate, ClassTemplate&lt; Ts... &gt; &gt;</a>	215

## 4 Class Index

### 4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">prior_hessian::meta::all_dists_are_bounded&lt; DistTs &gt;</a>	45
<a href="#">prior_hessian::AMHCopula&lt; Ndim &gt;</a>	46
<a href="#">prior_hessian::ArchimedeanCopula</a>	65
<a href="#">prior_hessian::BaseDist</a>	66
<a href="#">prior_hessian::CompositeDist::ComponentDistAdaptor&lt; Dist, meta::EnableIfSubclassT&lt; Dist, MultivariateDist &gt; &gt;</a>	67
<a href="#">prior_hessian::CompositeDist::ComponentDistAdaptor&lt; Dist, meta::EnableIfSubclassT&lt; Dist, UnivariateDist &gt; &gt;</a>	78
<a href="#">prior_hessian::CompositeDist</a>	
<b>A probability distribution made of independent component distributions composing groups of 1 or more variables</b>	89
<a href="#">prior_hessian::meta::conjunction&lt;... &gt;</a>	134
<a href="#">prior_hessian::meta::conjunction&lt; B1 &gt;</a>	135
<a href="#">prior_hessian::meta::conjunction&lt; B1, Bn... &gt;</a>	136
<a href="#">prior_hessian::CopulaDistImpl::CopulaDist&lt; CopulaTemplate, MarginalDistTs &gt;</a>	137
<a href="#">prior_hessian::ArchimedeanCopula::D2_GenTerms</a>	159
<a href="#">prior_hessian::ArchimedeanCopula::D2_IGenTerms</a>	161
<a href="#">prior_hessian::ArchimedeanCopula::D2Theta_GenTerms</a>	163
<a href="#">prior_hessian::ArchimedeanCopula::D2Theta_IGenTerms</a>	164
<a href="#">prior_hessian::ArchimedeanCopula::D_GenTerms</a>	166

<a href="#">prior_hessian::ArchimedeanCopula::D_IGenTerms</a>	167
<a href="#">prior_hessian::meta::disjunction&lt;... &gt;</a>	168
<a href="#">prior_hessian::meta::disjunction&lt; B1 &gt;</a>	169
<a href="#">prior_hessian::meta::disjunction&lt; B1, Bn... &gt;</a>	170
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; Dist &gt;</a>	171
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; CopulaDistImpl::CopulaDist&lt; CopulaTemplate, DistTs... &gt;</a>	172
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; GammaDist &gt;</a>	173
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; MultivariateNormalDist&lt; Ndim &gt; &gt;</a>	174
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; NormalDist &gt;</a>	175
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; ParetoDist &gt;</a>	176
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; ScaledSymmetricBetaDist &gt;</a>	177
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; SymmetricBetaDist &gt;</a>	178
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; TruncatedGammaDist &gt;</a>	179
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; TruncatedMultivariateNormalDist&lt; Ndim &gt; &gt;</a>	180
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; TruncatedNormalDist &gt;</a>	181
<a href="#">prior_hessian::detail::dist_adaptor_traits&lt; TruncatedParetoDist &gt;</a>	182
<a href="#">prior_hessian::ArchimedeanCopula::DTheta_GenTerms</a>	183
<a href="#">prior_hessian::ArchimedeanCopula::DTheta_IGenTerms</a>	184
<a href="#">prior_hessian::eulerian_number&lt; N, M &gt;</a>	185
<a href="#">prior_hessian::eulerian_number&lt; 0, M &gt;</a>	186
<a href="#">prior_hessian::GammaDist</a>	
<b>Gamma distribution</b>	187
<a href="#">prior_hessian::IndexError</a>	
<b>Indicates a index access was out of bounds</b>	205
<a href="#">prior_hessian::InvalidOperationError</a>	208
<a href="#">prior_hessian::meta::is_copula&lt; T, U &gt;</a>	210
<a href="#">prior_hessian::meta::is_numeric_template_of&lt; class, typename &gt;</a>	211
<a href="#">prior_hessian::meta::is_numeric_template_of&lt; ClassNumericTemplate, ClassNumericTemplate&lt; Is... &gt; &gt;</a>	212
<a href="#">prior_hessian::meta::is_subclass_of_numeric_template&lt; T, U &gt;</a>	213

<a href="#">prior_hessian::meta::is_template_of&lt; class, typename &gt;</a>	214
<a href="#">prior_hessian::meta::is_template_of&lt; ClassTemplate, ClassTemplate&lt; Ts... &gt; &gt;</a>	215
<a href="#">prior_hessian::mcmc::MCMCData&lt; Ndim &gt;</a>	216
<a href="#">prior_hessian::MultivariateDist</a>	218
<a href="#">prior_hessian::MultivariateNormalDist&lt; Ndim &gt;</a> Multivariate Normal distribution	220
<a href="#">prior_hessian::NormalDist</a> Normal distribution with truncation	248
<a href="#">prior_hessian::NotImplementedError</a>	272
<a href="#">prior_hessian::NumericalOverflowError</a>	274
<a href="#">prior_hessian::ParameterNameError</a>	276
<a href="#">prior_hessian::ParameterNameUniquenessError</a>	278
<a href="#">prior_hessian::ParameterSizeError</a>	280
<a href="#">prior_hessian::ParameterValueError</a>	282
<a href="#">prior_hessian::ParetoDist</a> Pareto dist with infinite upper bound	284
<a href="#">prior_hessian::PriorHessianError</a>	319
<a href="#">prior_hessian::RuntimeConvergenceError</a>	321
<a href="#">prior_hessian::RuntimeSamplingError</a>	323
<a href="#">prior_hessian::RuntimeTypeError</a>	325
<a href="#">prior_hessian::ScaledDist&lt; Dist &gt;</a>	327
<a href="#">prior_hessian::SymmetricBetaDist</a> Single parameter beta distribution where $\alpha = \beta$ , leading to symmetric bounded distribution	344
<a href="#">prior_hessian::TruncatedDist&lt; Dist &gt;</a>	361
<a href="#">prior_hessian::TruncatedMultivariateDist&lt; Dist &gt;</a>	377
<a href="#">prior_hessian::UnivariateDist</a>	383
<a href="#">prior_hessian::UpperTruncatedDist&lt; Dist &gt;</a>	385

## 5 File Index

### 5.1 File List

Here is a list of all files with brief descriptions:

<a href="#">AMHCopula.h</a>	
Ali-Mikhail-Haq Archimedean Copula	395
<a href="#">ArchimedeanCopula.h</a>	
CopulaDist base class	396
<a href="#">BaseDist.h</a>	
The Base class for UnivariateDist and MultivariateDist	397
<a href="#">BoundsAdaptedDist.h</a>	
Functions and type-traits to enable easy wrapping of distributions in bounds-modifiable adapters	398
<a href="#">CompositeDist.cpp</a>	
CompositeDist and associated classes and nested classes	400
<a href="#">CompositeDist.h</a>	
CompositeDist class declaration and inline and templated member function definitions	401
<a href="#">copula.h</a>	
CopulaDist base class	403
<a href="#">CopulaDist.h</a>	
CopulaDist base class	404
<a href="#">EulerianPolynomial.h</a>	
EulerianPolynomial computation	405
<a href="#">GammaDist.cpp</a>	
GammaDist class definition	406
<a href="#">GammaDist.h</a>	
GammaDist class declaration and templated methods	407
<a href="#">Meta.h</a>	
Enables the use of variadic templates in interesting ways	408
<a href="#">MultivariateDist.h</a>	
MultivariateDist base class	412
<a href="#">MultivariateNormalDist.h</a>	
MultivariateNormalDist base class	413
<a href="#">mvn_cdf.cpp</a>	414
<a href="#">mvn_cdf.h</a>	
Numerical computation of multivariate normal cdfs in 2,3 and higher dims	415
<a href="#">NormalDist.cpp</a>	
NormalDist class definition	417
<a href="#">NormalDist.h</a>	
NormalDist class declaration and templated methods	418
<a href="#">ParetoDist.cpp</a>	
ParetoDist class definition	419

<a href="#">ParetoDist.h</a>	
ParetoDist class declaration and templated methods	420
<a href="#">PolyLog.h</a>	
Poly log computation for negative integer valued parameters	421
<a href="#">PriorHessianError.h</a>	
The Exception classes for the PriorHessian library	422
<a href="#">ScaledDist.h</a>	
ScaledDist class declaration and templated methods	424
<a href="#">ScaledSymmetricBetaDist.h</a>	
ScaledSymmetricBetaDist class declaration and templated methods	425
<a href="#">SymmetricBetaDist.cpp</a>	
SymmetricBetaDist class definition	426
<a href="#">SymmetricBetaDist.h</a>	
SymmetricBetaDist class declaration and templated methods	427
<a href="#">TruncatedDist.h</a>	
TruncatedDist declaration and templated methods definitions	429
<a href="#">TruncatedGammaDist.h</a>	
TruncatedGammaDist class declaration and templated methods	430
<a href="#">TruncatedMultivariateDist.h</a>	
TruncatedMultivariateDist declaration and templated methods definitions	431
<a href="#">TruncatedMultivariateNormalDist.h</a>	
TruncatedMultivariateNormalDist class declaration	433
<a href="#">TruncatedNormalDist.h</a>	
TruncatedNormalDist class declaration	434
<a href="#">TruncatedParetoDist.h</a>	
TruncatedParetoDist class declaration and templated methods	435
<a href="#">UnivariateDist.cpp</a>	
UnivariateDist base class method definition	436
<a href="#">UnivariateDist.h</a>	
UnivariateDist base class	437
<a href="#">UpperTruncatedDist.h</a>	
UpperTruncatedDist declaration and templated methods definitions	438
<a href="#">util.cpp</a>	
Utilities	439
<a href="#">util.h</a>	
Utilities and namespace globals	441

## 6 Namespace Documentation



## 6.1 prior\_hessian Namespace Reference

### Namespaces

- [constants](#)
- [CopulaDistImpl](#)
- [detail](#)
- [genz](#)
- [helpers](#)
- [mcmc](#)
- [meta](#)
  - *Class templates to utilize sequencing behavior of `std::initializer_list` expressions.*
- [polylog](#)

### Classes

- class [AMHCopula](#)
- class [ArchimedeanCopula](#)
- class [BaseDist](#)
- class [CompositeDist](#)
  - *A probability distribution made of independent component distributions composing groups of 1 or more variables.*
- struct [eulerian\\_number](#)
- struct [eulerian\\_number< 0, M >](#)
- class [GammaDist](#)
  - *Gamma distribution.*
- struct [IndexError](#)
  - *Indicates a index access was out of bounds.*
- struct [InvalidOperationError](#)
- class [MultivariateDist](#)
- class [MultivariateNormalDist](#)
  - *Multivariate Normal distribution.*
- class [NormalDist](#)
  - *Normal distribution with truncation.*
- struct [NotImplementedError](#)
- struct [NumericalOverflowError](#)
- struct [ParameterNameError](#)
- struct [ParameterNameUniquenessError](#)
- struct [ParameterSizeError](#)
- struct [ParameterValueError](#)
- class [ParetoDist](#)
  - *Pareto dist with infinite upper bound.*
- class [PriorHessianError](#)
- struct [RuntimeConvergenceError](#)
- struct [RuntimeSamplingError](#)
- struct [RuntimeTypeError](#)
- class [ScaledDist](#)
- class [SymmetricBetaDist](#)
  - *Single parameter beta distribution where  $\alpha = \beta$ , leading to symmetric bounded distribution.*
- class [TruncatedDist](#)
- class [TruncatedMultivariateDist](#)
- class [UnivariateDist](#)
- class [UpperTruncatedDist](#)

## Typedefs

- `template<class DistT >`  
using `BoundsAdaptedDistT` = `typename detail::dist_adaptor_traits< std::decay_t< DistT >>::bounds_adapted_←_dist`
- `template<template< int > class CopulaTemplate, class... MarginalDistTs>`  
using `CopulaDist` = `CopulaDistImpl::CopulaDist< CopulaTemplate, BoundsAdaptedDistT< MarginalDistTs >... >`
- using `ScaledSymmetricBetaDist` = `ScaledDist< SymmetricBetaDist >`
- using `TruncatedGammaDist` = `TruncatedDist< GammaDist >`
- `template<IdxT Ndim>`  
using `TruncatedMultivariateNormalDist` = `TruncatedMultivariateDist< MultivariateNormalDist< Ndim >>`
- using `TruncatedNormalDist` = `TruncatedDist< NormalDist >`
- using `TruncatedParetoDist` = `UpperTruncatedDist< ParetoDist >`
- using `IdxT` = `arma::uword`
- using `UVecT` = `arma::Col< IdxT >`
- using `VecT` = `arma::Col< double >`
- using `MatT` = `arma::Mat< double >`
- using `StringVecT` = `std::vector< std::string >`
- using `TypeInfoVecT` = `std::vector< std::type_index >`

## Functions

- `std::ostream & operator<< (std::ostream &out, const CompositeDist &comp_dist)`
- `double unit_normal_cdf (double t)`
- `double unit_normal_icdf (double u)`
- `double bounded (double x)`
- `double owen_t_integral (double h, double a, double gh)`
- `double owen_b_integral (double h, double k, double r)`
- `double donnelly_bvn_integral (double ah, double ak, double r)`
- `double donnelly_bvn_integral_orig (double ah, double ak, double r)`
- `template<class Dist , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< detail::DistTraitsT< Dist >::adaptable_bounds, Dist > make_adapted_bounded_dist (Dist &&dist)`
- `template<class Dist , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< !detail::DistTraitsT< Dist >::adaptable_bounds, BoundsAdaptedDistT< Dist > > make_←adapted_bounded_dist (Dist &&dist)`
- `template<class Dist , class Vec , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< detail::DistTraitsT< Dist >::adaptable_bounds, Dist > make_adapted_bounded_dist (Dist &&dist, Vec &&lbound, Vec &&ubound)`
- `template<class Dist , class Vec , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< !detail::DistTraitsT< Dist >::adaptable_bounds, BoundsAdaptedDistT< Dist > > make_←adapted_bounded_dist (Dist &&dist, Vec &&lbound, Vec &&ubound)`
- `template<class... Ts>`  
`std::tuple< BoundsAdaptedDistT< Ts >... > make_adapted_bounded_dist_tuple (Ts &&...ts)`
- `template<class... Ts>`  
`std::tuple< BoundsAdaptedDistT< Ts >... > make_adapted_bounded_dist_tuple (std::tuple< Ts... > &&dists)`
- `template<class... Ts>`  
`std::tuple< BoundsAdaptedDistT< Ts >... > make_adapted_bounded_dist_tuple (const std::tuple< Ts... > &dists)`

- `template<template< int > class CopulaTemplate, class... MarginalDistTs>`  
`CopulaDist< CopulaTemplate, MarginalDistTs... > make_copula_dist` (`CopulaTemplate< sizeof...(MarginalDistTs)>` &&`copula`, `MarginalDistTs` &&...`dists`)
- `template<long N>`  
`VecT eulerian_polynomial` ()
- `double owen_t_integral` (`double h`, `double a`)
- `template<class Vec , class Mat >`  
`double donnelly_bvn_cdf` (`const Vec &b`, `const Mat &sigma`)
- `template<class Vec , class Mat >`  
`double owen_bvn_cdf` (`const Vec &b`, `const Mat &sigma`)
- `template<class Vec , class Mat >`  
`double mc_mvn_integral` (`const Vec &a`, `const Vec &b`, `const Mat &U`, `double &error`, `int &niter`)
- `template<class Vec , class Mat >`  
`double mc_mvn_cdf_core` (`const Vec &b`, `const Mat &U`, `double &error`, `int &niter`)
- `template<class Vec , class Mat >`  
`double mc_mvn_cdf` (`const Vec &b`, `const Mat &S`, `double &error`)
- `ScaledSymmetricBetaDist make_scaled_symmetric_beta_dist` (`double beta`, `std::pair< double, double > bounds`)
- `TruncatedGammaDist make_bounded_gamma_dist` (`double scale`, `double shape`, `std::pair< double, double > bounds`)
- `template<IdxT Ndim, class Vec , class Mat , class Vec2 >`  
`TruncatedMultivariateNormalDist< Ndim > make_bounded_multivariate_normal_dist` (`Vec &&mu`, `Mat &&sigma`, `Vec2 &&lbound`, `Vec2 &&ubound`)
- `TruncatedNormalDist make_bounded_normal_dist` (`double mu`, `double sigma`, `std::pair< double, double > bounds`)
- `TruncatedParetoDist make_bounded_pareto_dist` (`double alpha`, `std::pair< double, double > bounds`)
- `template<class T >`  
`T square` (`T t`)

### 6.1.1 Typedef Documentation

6.1.1.1 `template<class DistT > using prior_hessian::BoundsAdaptedDistT = typedef typename detail::dist_adaptor_traits<std::decay_t<DistT>>::bounds_adapted_dist`

The bounds-adapted distribution type for a given distribution type `DistT` This is the adapted version of the class, i.e., the class that allows truncation or scaling so that the lower and upper bounds are settable.

Definition at line 59 of file `BoundsAdaptedDist.h`.

6.1.1.2 `template<template< int > class CopulaTemplate, class... MarginalDistTs> using prior_hessian::CopulaDist = typedef CopulaDistImpl::CopulaDist<CopulaTemplate, BoundsAdaptedDistT<MarginalDistTs>...>`

Definition at line 182 of file `CopulaDist.h`.

6.1.1.3 `using prior_hessian::IdxT = typedef arma::uword`

Definition at line 28 of file `util.h`.

6.1.1.4 `using prior_hessian::MatT = typedef arma::Mat<double>`

Definition at line 31 of file `util.h`.

6.1.1.5 `using prior_hessian::ScaledSymmetricBetaDist = typedef ScaledDist<SymmetricBetaDist>`

Definition at line 15 of file ScaledSymmetricBetaDist.h.

6.1.1.6 `using prior_hessian::StringVecT = typedef std::vector<std::string>`

Definition at line 32 of file util.h.

6.1.1.7 `using prior_hessian::TruncatedGammaDist = typedef TruncatedDist<GammaDist>`

Definition at line 15 of file TruncatedGammaDist.h.

6.1.1.8 `template<IdxT Ndim> using prior_hessian::TruncatedMultivariateNormalDist = typedef TruncatedMultivariateDist<MultivariateNormalDist<Ndim>>`

Definition at line 18 of file TruncatedMultivariateNormalDist.h.

6.1.1.9 `using prior_hessian::TruncatedNormalDist = typedef TruncatedDist<NormalDist>`

Definition at line 17 of file TruncatedNormalDist.h.

6.1.1.10 `using prior_hessian::TruncatedParetoDist = typedef UpperTruncatedDist<ParetoDist>`

Definition at line 15 of file TruncatedParetoDist.h.

6.1.1.11 `using prior_hessian::TypeInfoVecT = typedef std::vector<std::type_index>`

Definition at line 33 of file util.h.

6.1.1.12 `using prior_hessian::UVecT = typedef arma::Col<IdxT>`

Definition at line 29 of file util.h.

6.1.1.13 `using prior_hessian::VecT = typedef arma::Col<double>`

Definition at line 30 of file util.h.


## 6.1.2 Function Documentation

### 6.1.2.1 `double prior_hessian::bounded ( double x )`

Definition at line 42 of file `mvn_cdf.cpp`.

Referenced by `donnelly_bvn_integral()`.

Here is the caller graph for this function:




### 6.1.2.2 `template<class Vec , class Mat > double prior_hessian::donnelly_bvn_cdf ( const Vec & b, const Mat & sigma )`

Definition at line 55 of file `mvn_cdf.h`.

References `donnelly_bvn_integral()`.

Here is the call graph for this function:



### 6.1.2.3 `double prior_hessian::donnelly_bvn_integral ( double ah, double ak, double r )`

compute the bivariate normal cdf integral computes the probability for two normal variates  $X$  and  $Y$  whose correlation is  $R$ , that  $AH \leq X$  and  $AK \leq Y$ .

Adapted to modern C++ with efficiency improvements by: Mark Olah ([mjo@cs.unm.edu](mailto:mjo@cs.unm.edu)) 10/2018

Reference: Thomas Donnelly, Algorithm 462: Bivariate Normal Distribution, Communications of the ACM, October 1973, Volume 16, Number 10, page 638.

compute the upper-right tail of the bivariate normal distribution computes the probability for two normal variates X and Y whose correlation is R, that  $AH \leq X$  and  $AK \leq Y$ .

Adapted to modern C++ with efficiency improvements by: Mark Olah ([mjo@cs.unm.edu](mailto:mjo@cs.unm.edu)) 10/2018


Reference: Thomas Donnelly, Algorithm 462: Bivariate Normal Distribution, Communications of the ACM, October 1973, Volume 16, Number 10, page 638.

Definition at line 158 of file mvn\_cdf.cpp.


References `bounded()`, and `unit_normal_cdf()`.

Referenced by `donnelly_bvn_cdf()`, and `owen_t_integral()`.

Here is the call graph for this function:

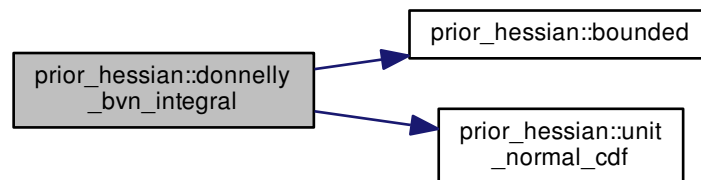

Here is the caller graph for this function:

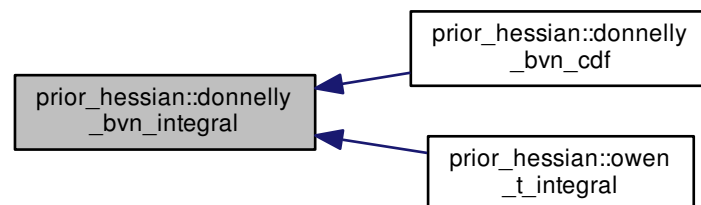


#### 6.1.2.4 `double prior_hessian::donnelly_bvn_integral_orig ( double ah, double ak, double r )`

Definition at line 268 of file `mvn_cdf.cpp`.


References `unit_normal_cdf()`.

Referenced by `owen_t_integral()`.

Here is the call graph for this function:



Here is the caller graph for this function:



#### 6.1.2.5 `template<long N> VecT prior_hessian::eulerian_polynomial ( )`

Definition at line 33 of file `EulerianPolynomial.h`.


#### 6.1.2.6 `template<class Dist , typename = meta::EnableIfIsNotTupleT<Dist>> std::enable_if_t< detail::DistTraitsT<Dist>::adaptable_bounds, Dist> prior_hessian::make_adapted_bounded_dist ( Dist && dist )`

[make\\_adapted\\_bounded\\_dist\(\)](#) [4-forms] If the given distribution is not bounded then the appropriate bounding distribution is wrapped around it. We detect the boundedness of the distribution using `detail::adaptable_bounds` type-traits class. Can be replaced with `constexpr` if in c++17. Uses SFINAE in c++14.

Definition at line 99 of file `BoundsAdaptedDist.h`.

Referenced by `prior_hessian::detail::make_adapted_bounded_dist_tuple()`, `make_adapted_bounded_dist_tuple()`, `prior_hessian::CompositeDist::make_component_dist()`, `prior_hessian::CompositeDist::make_component_dist_tuple()`, and `make_copula_dist()`.

Here is the caller graph for this function:

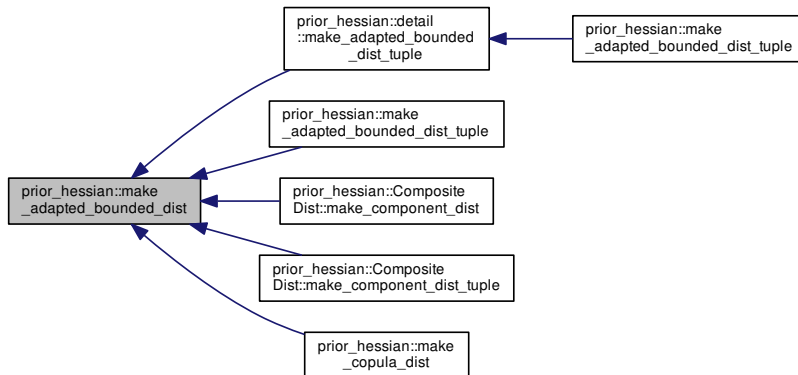

6.1.2.7 `template<class Dist , typename = meta::EnableIfsNotTupleT<Dist>> std::enable_if_t<!detail::DistTraitsT<Dist>::adaptable_bounds, BoundsAdaptedDistT<Dist>> prior_hessian::make_adapted_bounded_dist ( Dist && dist )`

Definition at line 104 of file BoundsAdaptedDist.h.

6.1.2.8 `template<class Dist , class Vec , typename = meta::EnableIfsNotTupleT<Dist>> std::enable_if_t<detail::DistTraitsT<Dist>::adaptable_bounds, Dist> prior_hessian::make_adapted_bounded_dist ( Dist && dist, Vec && lbound, Vec && ubound )`

Definition at line 109 of file BoundsAdaptedDist.h.

6.1.2.9 `template<class Dist , class Vec , typename = meta::EnableIfsNotTupleT<Dist>> std::enable_if_t<!detail::DistTraitsT<Dist>::adaptable_bounds, BoundsAdaptedDistT<Dist>> prior_hessian::make_adapted_bounded_dist ( Dist && dist, Vec && lbound, Vec && ubound )`


Definition at line 117 of file BoundsAdaptedDist.h.

6.1.2.10 `template<class... Ts> std::tuple<BoundsAdaptedDistT<Ts>...> prior_hessian::make_adapted_bounded_dist_tuple ( Ts &&... ts )`

Definition at line 132 of file BoundsAdaptedDist.h.

References `make_adapted_bounded_dist()`.

Here is the call graph for this function:






6.1.2.11 `template<class... Ts> std::tuple<BoundsAdaptedDistT<Ts>...> prior_hessian::make_adapted_bounded_dist_tuple ( std::tuple< Ts... > && dists )`

Definition at line 139 of file BoundsAdaptedDist.h.

References `prior_hessian::detail::make_adapted_bounded_dist_tuple()`.

Here is the call graph for this function:




6.1.2.12 `template<class... Ts> std::tuple<BoundsAdaptedDistT<Ts>...> prior_hessian::make_adapted_bounded_dist_tuple ( const std::tuple< Ts... > & dists )`

Definition at line 146 of file BoundsAdaptedDist.h.

References `prior_hessian::detail::make_adapted_bounded_dist_tuple()`.

Here is the call graph for this function:



6.1.2.13 `TruncatedGammaDist prior_hessian::make_bounded_gamma_dist ( double scale, double shape, std::pair< double, double > bounds ) [inline]`

Definition at line 18 of file TruncatedGammaDist.h.

6.1.2.14 `template<IdxT Ndim, class Vec , class Mat , class Vec2 > TruncatedMultivariateNormalDist<Ndim> prior_hessian::make_bounded_multivariate_normal_dist ( Vec && mu, Mat && sigma, Vec2 && lbound, Vec2 && ubound )`

Definition at line 22 of file TruncatedMultivariateNormalDist.h.

6.1.2.15 `TruncatedNormalDist prior_hessian::make_bounded_normal_dist ( double mu, double sigma, std::pair< double, double > bounds ) [inline]`

Definition at line 20 of file TruncatedNormalDist.h.

6.1.2.16 **TruncatedParetoDist** prior\_hessian::make\_bounded\_pareto\_dist ( double *alpha*, std::pair< double, double > *bounds* ) [inline]

Definition at line 18 of file TruncatedParetoDist.h.

6.1.2.17 **CopulaDist** template<template< int > class CopulaTemplate, class... MarginalDistTs> CopulaDist<CopulaTemplate, MarginalDistTs...> prior\_hessian::make\_copula\_dist ( CopulaTemplate< sizeof...(MarginalDistTs)> && *copula*, MarginalDistTs &&... *dists* )

Definition at line 187 of file CopulaDist.h.

References make\_adapted\_bounded\_dist().

Here is the call graph for this function:



6.1.2.18 **ScaledSymmetricBetaDist** prior\_hessian::make\_scaled\_symmetric\_beta\_dist ( double *beta*, std::pair< double, double > *bounds* ) [inline]


Definition at line 18 of file ScaledSymmetricBetaDist.h.

6.1.2.19 **mc\_mvn\_cdf** template<class Vec , class Mat > double prior\_hessian::mc\_mvn\_cdf ( const Vec & *b*, const Mat & *S*, double & *error* )

Definition at line 169 of file mvn\_cdf.h.

References mc\_mvn\_cdf\_core().

Here is the call graph for this function:

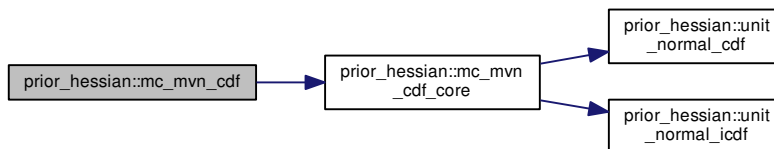

6.1.2.20 `template<class Vec , class Mat > double prior_hessian::mc_mvn_cdf_core ( const Vec & b, const Mat & U, double & error, int & niter )`


For the cdf  $a=-\text{Infinity}$ , so  $d=0$ .

Definition at line 130 of file `mvn_cdf.h`.


References `unit_normal_cdf()`, and `unit_normal_icdf()`.

Referenced by `mc_mvn_cdf()`.

Here is the call graph for this function:

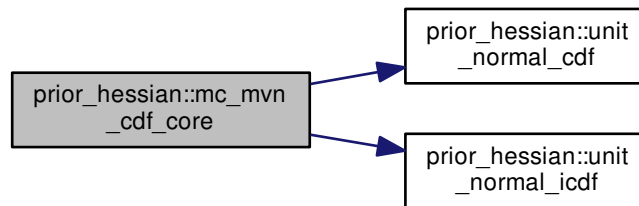

Here is the caller graph for this function:




6.1.2.21 `template<class Vec , class Mat > double prior_hessian::mc_mvn_integral ( const Vec & a, const Vec & b, const Mat & U, double & error, int & niter )`

compute the multivariate normal cdf integral

Definition at line 81 of file `mvn_cdf.h`.

References `unit_normal_cdf()`, and `unit_normal_icdf()`.

Here is the call graph for this function:

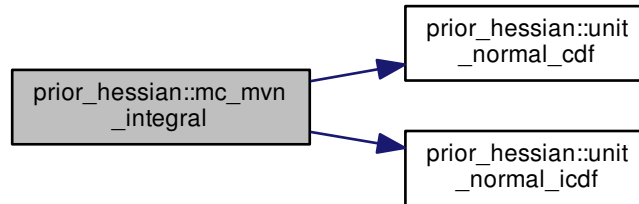


#### 6.1.2.22 `std::ostream & prior_hessian::operator<< ( std::ostream & out, const CompositeDist & comp_dist )`

Definition at line 80 of file `CompositeDist.cpp`.


References `prior_hessian::CompositeDist::component_names()`, `prior_hessian::CompositeDist::dim_variables()`, `prior_hessian::CompositeDist::global_lbound()`, `prior_hessian::CompositeDist::global_ubound()`, `prior_hessian::CompositeDist::lbound()`, `prior_hessian::CompositeDist::num_components()`, `prior_hessian::CompositeDist::num_dim()`, `prior_hessian::CompositeDist::num_dim_components()`, `prior_hessian::CompositeDist::num_params()`, `prior_hessian::CompositeDist::num_params_components()`, `prior_hessian::CompositeDist::param_names()`, `prior_hessian::CompositeDist::params()`, `prior_hessian::CompositeDist::params_lbound()`, `prior_hessian::CompositeDist::params_ubound()`, and `prior_hessian::CompositeDist::ubound()`.

Referenced by `prior_hessian::CompositeDist::set_param_names()`.

Here is the call graph for this function:

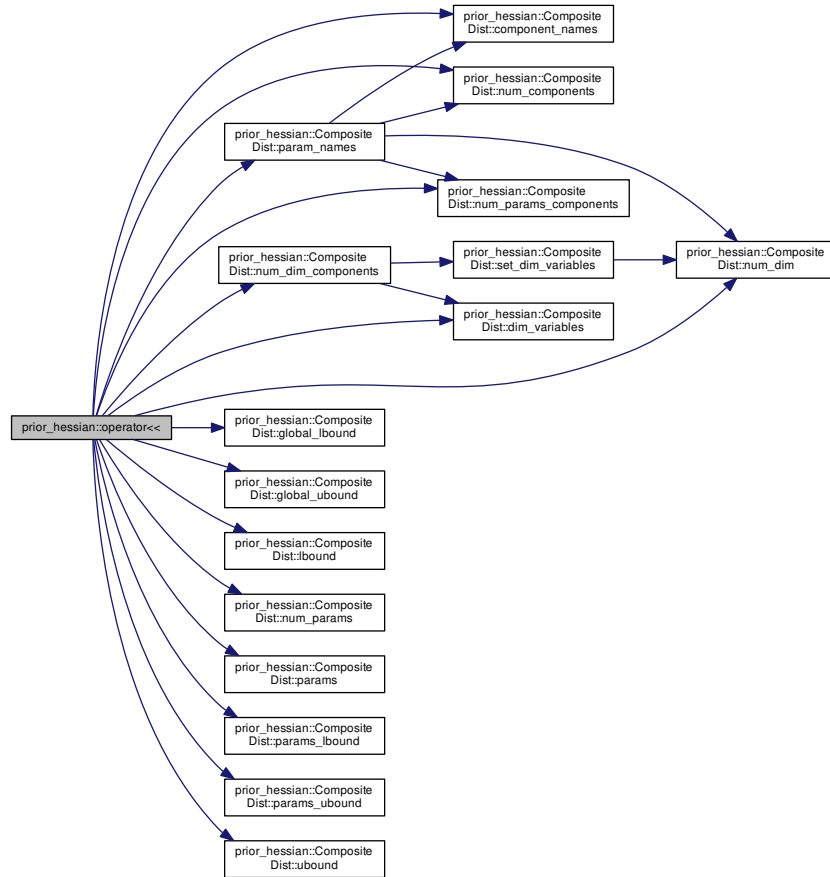

Here is the caller graph for this function:




### 6.1.2.23 `double prior_hessian::owen_b_integral ( double h, double k, double r )`

Definition at line 108 of file `mvn_cdf.cpp`.


References `owen_t_integral()`, and `unit_normal_cdf()`.

Referenced by `owen_bvn_cdf()`, and `owen_t_integral()`.

Here is the call graph for this function:



Here is the caller graph for this function:

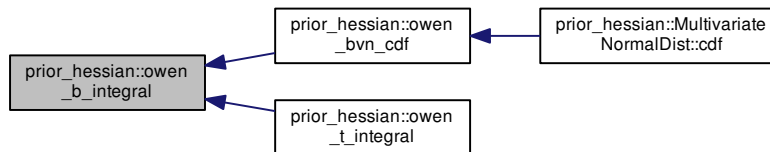


#### 6.1.2.24 `template<class Vec , class Mat > double prior_hessian::owen_bvn_cdf ( const Vec & b, const Mat & sigma )`

Definition at line 67 of file mvn\_cdf.h.


References `owen_b_integral()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::cdf()`.

Here is the call graph for this function:



Here is the caller graph for this function:




6.1.2.25 `double prior_hessian::owen_t_integral ( double h, double a ) [inline]`

Definition at line 26 of file `mvn_cdf.h`.

References `donnelly_bvn_integral()`, `donnelly_bvn_integral_orig()`, `owen_b_integral()`, `owen_t_integral()`, and `unit_normal_cdf()`.

Here is the call graph for this function:

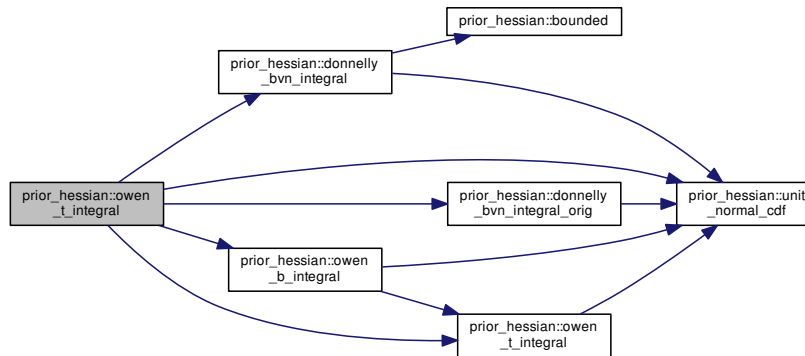


6.1.2.26 `double prior_hessian::owen_t_integral ( double h, double a, double gh )`

Definition at line 54 of file `mvn_cdf.cpp`.


References `unit_normal_cdf()`.

Referenced by `owen_b_integral()`, and `owen_t_integral()`.

Here is the call graph for this function:



Here is the caller graph for this function:




### 6.1.2.27 template<class T > T prior\_hessian::square ( T t )

Definition at line 44 of file util.h.

Referenced by `prior_hessian::helpers::compute_quadratic_from_symmetric()`, `prior_hessian::NormalDist::grad()`, `prior_hessian::SymmetricBetaDist::grad2()`, `prior_hessian::NormalDist::grad2()`, `prior_hessian::AMHCopula< Ndim >::grad2()`, `prior_hessian::NormalDist::grad_grad2_accumulate()`, `prior_hessian::AMHCopula< Ndim >::hess()`, `prior_hessian::NormalDist::pdf()`, and `prior_hessian::NormalDist::rllh()`.

Here is the caller graph for this function:

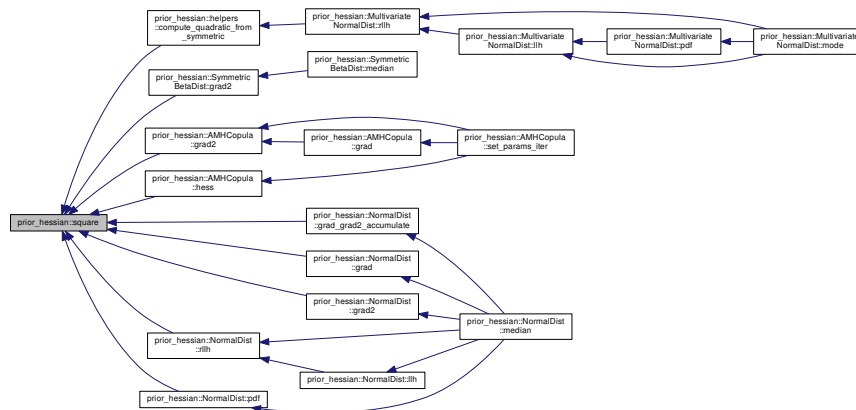




### 6.1.2.28 double prior\_hessian::unit\_normal\_cdf ( double t )

area of the lower tail of the unit normal curve below t.

Definition at line 28 of file mvn\_cdf.cpp.

Referenced by donnelly\_bvn\_integral(), donnelly\_bvn\_integral\_orig(), mc\_mvn\_cdf\_core(), mc\_mvn\_integral(), owen\_b\_inte-  
\_gral(), and owen\_t\_integral().

Here is the caller graph for this function:

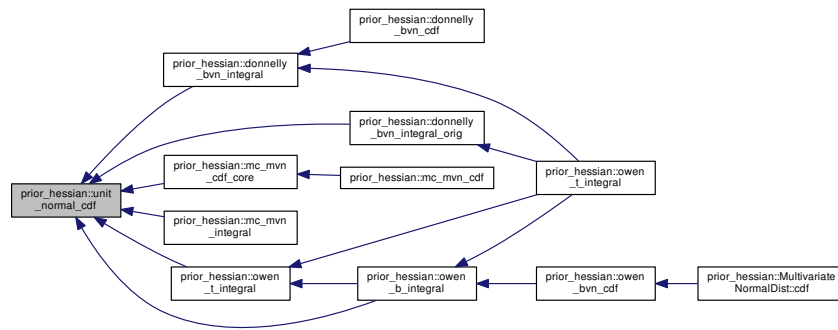


### 6.1.2.29 double prior\_hessian::unit\_normal\_icdf ( double u )

Definition at line 35 of file mvn\_cdf.cpp.

References prior\_hessian::constants::sqrt2.

Referenced by mc\_mvn\_cdf\_core(), and mc\_mvn\_integral().

Here is the caller graph for this function:

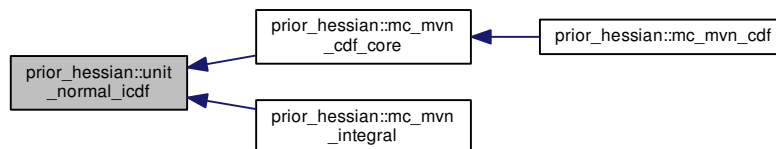

## 6.2 prior\_hessian::constants Namespace Reference

### Variables

- const double [sqrt2](#) = std::sqrt(2.)
- const double [sqrt2\\_inv](#) = 1./std::sqrt(2.)
- const double [sqrt2pi](#) = std::sqrt(2.\*arma::datum::pi)
- const double [sqrt2pi\\_inv](#) = 1./std::sqrt(2.\*arma::datum::pi)
- const double [log2pi](#) = std::log(2.\*arma::datum::pi)

### 6.2.1 Variable Documentation

#### 6.2.1.1 const double prior\_hessian::constants::log2pi = std::log(2.\*arma::datum::pi)

Definition at line 16 of file util.cpp.

Referenced by prior\_hessian::NormalDist::llh(), and prior\_hessian::MultivariateNormalDist< Ndim >::sample().

#### 6.2.1.2 const double prior\_hessian::constants::sqrt2 = std::sqrt(2.)

Definition at line 12 of file util.cpp.

Referenced by prior\_hessian::NormalDist::icdf(), and prior\_hessian::unit\_normal\_icdf().

#### 6.2.1.3 const double prior\_hessian::constants::sqrt2\_inv = 1./std::sqrt(2.)

Definition at line 13 of file util.cpp.

Referenced by prior\_hessian::NormalDist::cdf().

#### 6.2.1.4 const double prior\_hessian::constants::sqrt2pi = std::sqrt(2.\*arma::datum::pi)

Definition at line 14 of file util.cpp.

#### 6.2.1.5 const double prior\_hessian::constants::sqrt2pi\_inv = 1./std::sqrt(2.\*arma::datum::pi)

Definition at line 15 of file util.cpp.

Referenced by prior\_hessian::NormalDist::pdf().

## 6.3 prior\_hessian::CopulaDistImpl Namespace Reference

### Classes

- class [CopulaDist](#)

## 6.4 prior\_hessian::detail Namespace Reference

### Classes

- class [dist\\_adaptor\\_traits](#)
- struct [dist\\_adaptor\\_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > >](#)
- struct [dist\\_adaptor\\_traits< GammaDist >](#)
- struct [dist\\_adaptor\\_traits< MultivariateNormalDist< Ndim > >](#)
- struct [dist\\_adaptor\\_traits< NormalDist >](#)
- struct [dist\\_adaptor\\_traits< ParetoDist >](#)
- struct [dist\\_adaptor\\_traits< ScaledSymmetricBetaDist >](#)
- struct [dist\\_adaptor\\_traits< SymmetricBetaDist >](#)
- struct [dist\\_adaptor\\_traits< TruncatedGammaDist >](#)
- struct [dist\\_adaptor\\_traits< TruncatedMultivariateNormalDist< Ndim > >](#)
- struct [dist\\_adaptor\\_traits< TruncatedNormalDist >](#)
- struct [dist\\_adaptor\\_traits< TruncatedParetoDist >](#)

### Typedefs

- `template<class DistT >`  
`using DistTraitsT = detail::dist\_adaptor\_traits< std::decay_t< DistT >>`

### Functions

- `template<class... Ts, std::size_t... I>`  
`std::tuple< BoundsAdaptedDistT< Ts >... > make\_adapted\_bounded\_dist\_tuple (std::tuple< Ts... > &&dists, std::index_sequence< I... >)`
- `template<class... Ts, std::size_t... I>`  
`std::tuple< BoundsAdaptedDistT< Ts >... > make\_adapted\_bounded\_dist\_tuple (const std::tuple< Ts... > &dists, std::index_sequence< I... >)`
- `template<long N, long... I>`  
`VecT eulerian\_polynomial ()`

#### 6.4.1 Typedef Documentation

- 6.4.1.1 `template<class DistT > using prior\_hessian::detail::DistTraitsT = typedef detail::dist\_adaptor\_traits<std::decay_t<DistT>>`

Type traits class for distribution type DistT.

The traits class describes the Adaptor classes applicable to each individual distribution

Definition at line 52 of file `BoundsAdaptedDist.h`.

#### 6.4.2 Function Documentation

- 6.4.2.1 `template<long N, long... I> VecT prior\_hessian::detail::eulerian\_polynomial ( )`

Definition at line 26 of file `EulerianPolynomial.h`.


```
6.4.2.2 template<class... Ts, std::size_t... I> std::tuple<BoundsAdaptedDistT<Ts>...> prior_hessian↔
::detail::make_adapted_bounded_dist_tuple ( std::tuple< Ts... > && dists, std::index_sequence< I... >
)
```

Definition at line 66 of file BoundsAdaptedDist.h.


References prior\_hessian::make\_adapted\_bounded\_dist().

Referenced by prior\_hessian::make\_adapted\_bounded\_dist\_tuple().

Here is the call graph for this function:



Here is the caller graph for this function:




```
6.4.2.3 template<class... Ts, std::size_t... I> std::tuple<BoundsAdaptedDistT<Ts>...> prior_hessian::detail↔
::make_adapted_bounded_dist_tuple ( const std::tuple< Ts... > & dists, std::index_sequence< I... >
)
```

Definition at line 73 of file BoundsAdaptedDist.h.

References prior\_hessian::make\_adapted\_bounded\_dist().

Here is the call graph for this function:



## 6.5 prior\_hessian::genz Namespace Reference

### Namespaces

- [fortran](#)

### Functions

- `template<class Vec , class Mat >`  
`double mvn\_cdf\_genz (const Vec &b, const Mat &S, double &error)`

#### 6.5.1 Function Documentation

6.5.1.1 `template<class Vec , class Mat > double prior_hessian::genz::mvn_cdf_genz ( const Vec & b, const Mat & S, double & error )`

Definition at line 217 of file mvn\_cdf.h.


References `prior_hessian::genz::fortran::mvndst_()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::cdf()`.

Here is the call graph for this function:



Here is the caller graph for this function:



## 6.6 prior\_hessian::genz::fortran Namespace Reference

### Functions

- int `mvndst_` (int \*n, double lower[], double upper[], int infin[], double correl[], int \*maxpts, double \*abseps, double \*releps, double \*error, double \*value, int \*inform)

#### 6.6.1 Function Documentation

- 6.6.1.1 int `prior_hessian::genz::fortran::mvndst_` ( int \* n, double *lower*[], double *upper*[], int *infin*[], double *correl*[], int \* *maxpts*, double \* *abseps*, double \* *releps*, double \* *error*, double \* *value*, int \* *inform* )

Referenced by `prior_hessian::genz::mvn_cdf_genz()`.

Here is the caller graph for this function:



## 6.7 prior\_hessian::helpers Namespace Reference

### Functions

- `template<class Vec , class Mat >`  
double `compute_quadratic_from_symmetric` (IdxT Ndim, const Vec &v, const Mat &A)

#### 6.7.1 Function Documentation


- 6.7.1.1 `template<class Vec , class Mat >` double `prior_hessian::helpers::compute_quadratic_from_symmetric` ( IdxT Ndim, const Vec & v, const Mat & A )

Definition at line 137 of file `MultivariateNormalDist.h`.


References `prior_hessian::square()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::rllh()`.

Here is the call graph for this function:



Here is the caller graph for this function:



## 6.8 `prior_hessian::mcmc` Namespace Reference

### Classes

- class [MCMCData](#)

## 6.9 `prior_hessian::meta` Namespace Reference

Class templates to utilize sequencing behavior of `std::initializer_list` expressions.

### Classes

- struct [all\\_dists\\_are\\_bounded](#)
- struct [conjunction](#)
- struct [conjunction< B1 >](#)
- struct [conjunction< B1, Bn... >](#)
- struct [disjunction](#)
- struct [disjunction< B1 >](#)
- struct [disjunction< B1, Bn... >](#)
- class [is\\_copula](#)
- struct [is\\_numeric\\_template\\_of](#)
- struct [is\\_numeric\\_template\\_of< ClassNumericTemplate, ClassNumericTemplate< Is... > >](#)
- class [is\\_subclass\\_of\\_numeric\\_template](#)
- struct [is\\_template\\_of](#)
- struct [is\\_template\\_of< ClassTemplate, ClassTemplate< Ts... > >](#)

## Typedefs

- `template<class... DistTs>`  
using `ConstructableIfAllDistsAreBoundedT` = `std::enable_if< all_dists_are_bounded< DistTs... >::value, bool >`
- `template<class... DistTs>`  
using `ConstructableIfNotAllDistsAreBoundedT` = `std::enable_if<!all_dists_are_bounded< DistTs... >::value, bool >`
- `template<template< template< int > class, class... > class CopulaT, class U >`  
using `ConstructableIfIsCopulaT` = `std::enable_if_t< is_copula< CopulaT, U >::value, bool >`
- `template<class ReturnT, class BoolT >`  
using `ReturnIfT` = `std::enable_if_t< BoolT::value, ReturnT >`
- `template<bool val>`  
using `ConstructableIf` = `std::enable_if_t< val, bool >`
- `template<bool val>`  
using `ConstructableIfNot` = `std::enable_if_t<!val, bool >`
- `template<class T, class SelfT >`  
using `ConstructableIfNotSelfT` = `std::enable_if_t<!std::is_same< std::decay_t< T >, SelfT >::value, bool >`
- `template<class T, class BaseT >`  
using `EnableIfSubclassT` = `std::enable_if_t< std::is_base_of< std::remove_reference_t< BaseT >, std::remove_reference_t< T >>::value >`
- `template<class T, template< int > class ClassNumericTemplate>`  
using `EnableIfSubclassOfNumericTemplateT` = `std::enable_if_t< is_subclass_of_numeric_template< ClassNumericTemplate, std::remove_reference_t< T >>::value >`
- `template<class ReturnT, class T, template< int > class ClassNumericTemplate>`  
using `ReturnIfSubclassOfNumericTemplateT` = `std::enable_if_t< is_subclass_of_numeric_template< ClassNumericTemplate, std::remove_reference_t< T >>::value, ReturnT >`
- `template<class T, class SelfT >`  
using `EnableIfNotIsSelfT` = `std::enable_if_t< !std::is_same< std::decay_t< T >, SelfT >::value >`
- `template<class ReturnT, class T, class BaseT >`  
using `ReturnIfSubclassT` = `std::enable_if_t< std::is_base_of< std::remove_reference_t< BaseT >, std::remove_reference_t< T >>::value, ReturnT >`
- `template<class BaseT, class... Ts>`  
using `EnableIfIsSuperclassOfAllT` = `std::enable_if_t< conjunction< std::is_base_of< std::remove_reference_t< BaseT >, std::remove_reference_t< Ts >>... >::value >`
- `template<class T, template< typename... > class ClassTemplate>`  
using `EnableIfInstantiatedFromT` = `std::enable_if_t< is_template_of< ClassTemplate, std::remove_reference_t< T >>::value >`
- `template<class T, template< int > class ClassTemplate>`  
using `EnableIfInstantiatedFromNumericT` = `std::enable_if_t< is_numeric_template_of< ClassTemplate, std::remove_reference_t< T >>::value >`
- `template<class ReturnT, class T, template< int > class ClassTemplate>`  
using `ReturnIfInstantiatedFromNumericT` = `std::enable_if_t< is_numeric_template_of< ClassTemplate, std::remove_reference_t< T >>::value, ReturnT >`
- `template<class T, template< typename... > class ClassTemplate>`  
using `EnableIfNotInstantiatedFromT` = `std::enable_if_t< !is_template_of< ClassTemplate, std::remove_reference_t< T >>::value >`
- `template<class ReturnT, class TestT, template< typename... > class ClassTemplate>`  
using `ReturnIfInstantiatedFromT` = `std::enable_if_t< is_template_of< ClassTemplate, std::remove_reference_t< TestT >>::value, ReturnT >`
- `template<class ReturnT, class TestT, template< typename... > class ClassTemplate>`  
using `ReturnIfNotInstantiatedFromT` = `std::enable_if_t< !is_template_of< ClassTemplate, std::remove_reference_t< TestT >>::value, ReturnT >`



- `template<template< typename > class ClassTemplate, class... Ts>  
using EnableIfIsTemplateForAllT = std::enable_if_t< conjunction< is\_template\_of< ClassTemplate, std::remove_reference_t< Ts >>... >::value >`
- `template<template< typename... > class ClassTemplate, class... Ts>  
using ConstructableIfIsTemplateForAllT = std::enable_if_t< conjunction< is\_template\_of< ClassTemplate, std::remove_reference_t< Ts >>... >::value, bool >`
- `template<class SuperClass , class T >  
using ConstructableIfIsSuperClassT = std::enable_if_t< std::is_base_of< std::remove_reference_t< SuperClass >, std::remove_reference_t< T >>::value, bool >`
- `template<class SuperClass , class... Ts>  
using ConstructableIfIsSuperClassForAllT = std::enable_if_t< conjunction< std::is_base_of< std::remove_reference_t< SuperClass >, std::remove_reference_t< Ts >>... >::value, bool >`
- `template<class T , template< int > class ClassTemplate>  
using ConstructableIfInstantiatedFromNumericT = std::enable_if_t< is\_numeric\_template\_of< ClassTemplate, std::remove_reference_t< T >>::value, bool >`
- `template<class T >  
using EnableIfIsNotTupleT = std::enable_if_t< !is\_template\_of< std::tuple, std::remove_reference_t< T >>::value >`
- `template<class... Ts>  
using EnableIfNonEmpty = std::enable_if_t< (sizeof...(Ts)>0) >`
- `template<class... Ts>  
using EnableIfAllAreNotTupleT = std::enable_if_t< !disjunction< is\_template\_of< std::tuple, std::remove_reference_t< Ts >>... >::value >`
- `template<class SelfT , class T >  
using EnableIfIsNotTupleAndIsNotSelfT = std::enable_if_t< !is\_template\_of< std::tuple, std::remove_reference_t< T >>::value && !std::is_same< std::decay_t< T >, SelfT >::value >`
- `template<class T , class... Ts>  
using ConstructableIfAllAreNotTupleAndAreNotT = std::enable_if_t< !disjunction< is\_template\_of< std::tuple, std::remove_reference_t< Ts >>... >::value && !disjunction< std::is_same< std::decay_t< Ts >, T >... >::value, bool >`
- `template<class Dist , class BaseDist >  
using DerivedFrom = std::enable_if_t< std::is_base_of< std::decay_t< BaseDist >, std::decay_t< Dist >>::value, std::decay_t< Dist >>`

## Functions

- `template<class T = int>  
void call\_in\_order (std::initializer_list< T >)`
- `template<class InputIterator , class ResultT , class BinaryOperation >  
PRIOR\_HESSIAN\_META\_CONSTEXPR ResultT constexpr\_accumulate (InputIterator first, InputIterator last, ResultT init, BinaryOperation op)`
- `PRIOR\_HESSIAN\_META\_CONSTEXPR bool logical\_and\_in\_order (std::initializer_list< bool > L)`
- `template<class T >  
PRIOR\_HESSIAN\_META\_CONSTEXPR T sum\_in\_order (std::initializer_list< T > L)`
- `template<class T >  
PRIOR\_HESSIAN\_META\_CONSTEXPR T prod\_in\_order (std::initializer_list< T > L)`

### 6.9.1 Detailed Description

Class templates to utilize sequencing behavior of `std::initializer_list` expressions.

These class templates are intended to be used in variadic template functions to sequence the order of calls as a `std::initializer_list`.

## 6.9.2 Typedef Documentation

6.9.2.1 `template<bool val> using prior_hessian::meta::ConstructableIf = typedef std::enable_if_t<val,bool>`

Definition at line 117 of file Meta.h.

6.9.2.2 `template<class T, class... Ts> using prior_hessian::meta::ConstructableIfAllAreNotTupleAndAreNotT = typedef std::enable_if_t<!disjunction<is_template_of<std::tuple,std::remove_reference_t<Ts>>...>::value &&!disjunction<std::is_same<std::decay_t<Ts>,T>...>::value, bool>`

Definition at line 214 of file Meta.h.

6.9.2.3 `template<class... DistTs> using prior_hessian::meta::ConstructableIfAllDistsAreBoundedT = typedef std::enable_if_t<all_dists_are_bounded<DistTs...>::value,bool>`

Definition at line 87 of file BoundsAdaptedDist.h.

6.9.2.4 `template<class T, template< int > class ClassTemplate> using prior_hessian::meta::ConstructableIfInstantiatedFromNumericT = typedef std::enable_if_t< is_numeric_template_of<ClassTemplate, std::remove_reference_t<T>>::value, bool >`

Definition at line 194 of file Meta.h.

6.9.2.5 `template<template< template< int > class, class... > class CopulaT, class U > using prior_hessian::meta::ConstructableIfIsCopulaT = typedef std::enable_if_t<is_copula<CopulaT,U>::value ,bool>`

Definition at line 111 of file Meta.h.

6.9.2.6 `template<class SuperClass, class... Ts> using prior_hessian::meta::ConstructableIfIsSuperClassForAllT = typedef std::enable_if_t< conjunction< std::is_base_of<std::remove_reference_t<SuperClass>,std::remove_reference_t<Ts>>... >::value, bool>`

Definition at line 190 of file Meta.h.

6.9.2.7 `template<class SuperClass, class T > using prior_hessian::meta::ConstructableIfIsSuperClassT = typedef std::enable_if_t< std::is_base_of<std::remove_reference_t<SuperClass>,std::remove_reference_t<T>>::value, bool>`

Definition at line 186 of file Meta.h.

6.9.2.8 `template<template< typename... > class ClassTemplate, class... Ts> using prior_hessian::meta::ConstructableIfIsTemplateForAllT = typedef std::enable_if_t< conjunction< is_template_of<ClassTemplate,std::remove_reference_t<Ts>> ... >::value, bool>`

Definition at line 182 of file Meta.h.

6.9.2.9 `template<bool val> using prior_hessian::meta::ConstructableIfNot = typedef std::enable_if_t<!val,bool>`

Definition at line 120 of file Meta.h.

6.9.2.10 `template<class... DistTs> using prior_hessian::meta::ConstructableIfNotAllDistsAreBoundedT = typedef std::enable_if_t<!all_dists_are_bounded<DistTs...>::value,bool>`

Definition at line 89 of file BoundsAdaptedDist.h.

6.9.2.11 `template<class T , class SelfT > using prior_hessian::meta::ConstructableIfNotSelfT = typedef std::enable_if_t<!std::is_same<std::decay_t<T>,SelfT>::value,bool>`

Definition at line 123 of file Meta.h.

6.9.2.12 `template<class Dist , class BaseDist > using prior_hessian::meta::DerivedFrom = typedef std::enable_if_t<std::is_base_of<std::decay_t<BaseDist>,std::decay_t<Dist>>::value,std::decay_t<Dist>>`

Definition at line 228 of file Meta.h.

6.9.2.13 `template<class... Ts> using prior_hessian::meta::EnableIfAllAreNotTupleT = typedef std::enable_if_t<!disjunction< is_template_of<std::tuple,std::remove_reference_t<Ts>>... >::value >`

Definition at line 204 of file Meta.h.

6.9.2.14 `template<class T , template< int > class ClassTemplate> using prior_hessian::meta::EnableIfInstantiatedFromNumericT = typedef std::enable_if_t< is_numeric_template_of<ClassTemplate, std::remove_reference_t<T>>::value >`

Definition at line 158 of file Meta.h.

6.9.2.15 `template<class T , template< typename... > class ClassTemplate> using prior_hessian::meta::EnableIfInstantiatedFromT = typedef std::enable_if_t< is_template_of<ClassTemplate, std::remove_reference_t<T>>::value >`

Definition at line 150 of file Meta.h.

6.9.2.16 `template<class SelfT , class T > using prior_hessian::meta::EnableIfIsNotTupleAndIsNotSelfT = typedef std::enable_if_t< !is_template_of<std::tuple,std::remove_reference_t<T>>::value && !std::is_same<std::decay_t<T>,SelfT>::value >`

Definition at line 209 of file Meta.h.

6.9.2.17 `template<class T > using prior_hessian::meta::EnableIfIsNotTupleT = typedef std::enable_if_t<!is_template_of<std::tuple,std::remove_reference_t<T>>::value >`

Definition at line 197 of file Meta.h.

6.9.2.18 `template<class BaseT , class... Ts> using prior_hessian::meta::EnableIfIsSuperclassOfAllT = typedef std::enable_if_t<conjunction< std::is_base_of<std::remove_reference_t<BaseT>,std::remove_reference_t<Ts>>> ... >::value >`

Definition at line 146 of file Meta.h.

6.9.2.19 `template<template< typename > class ClassTemplate, class... Ts> using prior_hessian::meta::EnableIfIsTemplateForAllT = typedef std::enable_if_t< conjunction< is_template_of<ClassTemplate,std::remove_reference_t<Ts>>> ... >::value >`

Definition at line 178 of file Meta.h.

6.9.2.20 `template<class... Ts> using prior_hessian::meta::EnableIfNonEmpty = typedef std::enable_if_t< (sizeof...(Ts)>0) >`

Definition at line 200 of file Meta.h.

6.9.2.21 `template<class T , template< typename... > class ClassTemplate> using prior_hessian::meta::EnableIfNotInstantiatedFromT = typedef std::enable_if_t< !is_template_of<ClassTemplate, std::remove_reference_t<T>>>::value >`

Definition at line 166 of file Meta.h.

6.9.2.22 `template<class T , class SelfT > using prior_hessian::meta::EnableIfNotIsSelfT = typedef std::enable_if_t< !std::is_same<std::decay_t<T>,SelfT>::value >`

Definition at line 138 of file Meta.h.

6.9.2.23 `template<class T , template< int > class ClassNumericTemplate> using prior_hessian::meta::EnableIfSubclassOfNumericTemplateT = typedef std::enable_if_t< is_subclass_of_numeric_template<ClassNumericTemplate, std::remove_reference_t<T>>>::value >`

Definition at line 131 of file Meta.h.

6.9.2.24 `template<class T , class BaseT > using prior_hessian::meta::EnableIfSubclassT = typedef std::enable_if_t< std::is_base_of<std::remove_reference_t<BaseT>,std::remove_reference_t<T>>>::value >`

Definition at line 127 of file Meta.h.

6.9.2.25 `template<class ReturnT , class T , template< int > class ClassTemplate> using prior_hessian::meta::ReturnIfInstantiatedFromNumericT = typedef std::enable_if_t< is_numeric_template_of<ClassTemplate, std::remove_reference_t<T>>>::value, ReturnT >`

Definition at line 162 of file Meta.h.

6.9.2.26 `template<class ReturnT , class TestT , template< typename... > class ClassTemplate> using prior_hessian::meta::ReturnIfInstantiatedFromT = typedef std::enable_if_t< is_template_of<ClassTemplate, std::remove_reference_t<TestT>>>::value, ReturnT >`

Definition at line 170 of file Meta.h.

6.9.2.27 `template<class ReturnT , class TestT , template< typename... > class ClassTemplate> using prior_hessian::meta::ReturnIfNotInstantiatedFromT = typedef std::enable_if_t< !is_template_of<ClassTemplate, std::remove_reference_t<TestT>>::value, ReturnT>`

Definition at line 174 of file Meta.h.

6.9.2.28 `template<class ReturnT , class T , template< int > class ClassNumericTemplate> using prior_hessian::meta::ReturnIfSubclassOfNumericTemplateT = typedef std::enable_if_t< is_subclass_of_numeric_template<ClassNumericTemplate, std::remove_reference_t<T>>::value, ReturnT>`

Definition at line 135 of file Meta.h.

6.9.2.29 `template<class ReturnT , class T , class BaseT > using prior_hessian::meta::ReturnIfSubclassT = typedef std::enable_if_t< std::is_base_of<std::remove_reference_t<BaseT>,std::remove_reference_t<T>>::value, ReturnT>`

Definition at line 142 of file Meta.h.

6.9.2.30 `template<class ReturnT , class BoolT > using prior_hessian::meta::ReturnIfT = typedef std::enable_if_t<BoolT::value,ReturnT>`

Definition at line 114 of file Meta.h.

### 6.9.3 Function Documentation

6.9.3.1 `template<class T = int> void prior_hessian::meta::call_in_order ( std::initializer_list< T > )`


NOOP function which is used to ensure call order on a variadic sequence of function calls

Definition at line 41 of file Meta.h.

References PRIOR\_HESSIAN\_META\_CONSTEXPR.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CompositeDist::rllh_components()`.

Here is the caller graph for this function:

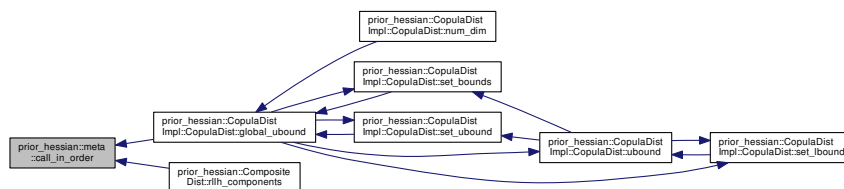


6.9.3.2 `template<class InputIterator, class ResultT, class BinaryOperation> PRIOR_HESSIAN_META_CONSTEXPR  
ResultT prior_hessian::meta::constexpr_accumulate ( InputIterator first, InputIterator last, ResultT init, BinaryOperation op  
)`

Definition at line 46 of file Meta.h.

References PRIOR\_HESSIAN\_META\_CONSTEXPR.

Referenced by `logical_and_in_order()`, `prod_in_order()`, and `sum_in_order()`.

Here is the caller graph for this function:

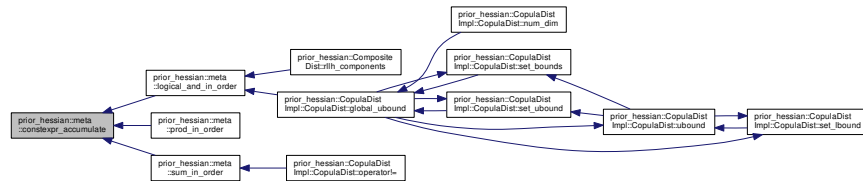


6.9.3.3 `PRIOR_HESSIAN_META_CONSTEXPR bool prior_hessian::meta::logical_and_in_order ( std::initializer_list< bool >  
L ) [inline]`

Definition at line 53 of file Meta.h.


References `constexpr_accumulate()`, and PRIOR\_HESSIAN\_META\_CONSTEXPR.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CompositeDist::rllh_components()`.

Here is the call graph for this function:



Here is the caller graph for this function:

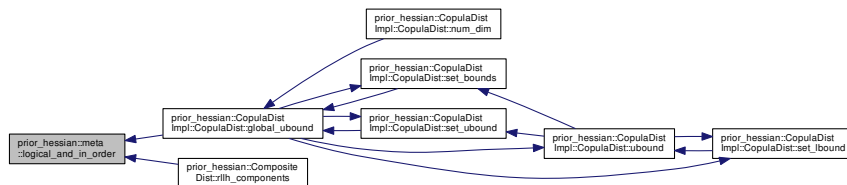

6.9.3.4 `template<class T > PRIOR_HESSIAN_META_CONSTEXPR T prior_hessian::meta::prod_in_order ( std::initializer_list< T > L )`

Definition at line 63 of file Meta.h.

References `constexpr_accumulate()`.

Here is the call graph for this function:



6.9.3.5 `template<class T > PRIOR_HESSIAN_META_CONSTEXPR T prior_hessian::meta::sum_in_order ( std::initializer_list< T > L )`

Definition at line 58 of file Meta.h.

References `constexpr_accumulate()`, and `PRIOR_HESSIAN_META_CONSTEXPR`.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=(())`.

Here is the graph for this function:



Here is the caller graph for this function:



## 6.10 prior\_hessian::polylog Namespace Reference

### Functions

- `template<int n>`  
`double eulerian_polynomial (double z)`
- `template<>`  
`double eulerian_polynomial< 0 > (double)`
- `template<>`  
`double eulerian_polynomial< 1 > (double z)`
- `template<>`  
`double eulerian_polynomial< 2 > (double z)`
- `template<>`  
`double eulerian_polynomial< 3 > (double z)`
- `template<>`  
`double eulerian_polynomial< 4 > (double z)`
- `template<>`  
`double eulerian_polynomial< 5 > (double z)`
- `template<>`  
`double eulerian_polynomial< 6 > (double z)`
- `template<>`  
`double eulerian_polynomial< 7 > (double z)`
- `template<>`  
`double eulerian_polynomial< 8 > (double z)`
- `template<>`  
`double eulerian_polynomial< 9 > (double z)`
- `template<int n>`  
`double polylog (double z)`
- `template<>`  
`double polylog< 1 > (double z)`

#### 6.10.1 Function Documentation

6.10.1.1 `template<int n> double prior_hessian::polylog::eulerian_polynomial ( double z )`

6.10.1.2 `template<> double prior_hessian::polylog::eulerian_polynomial< 0 > ( double )`

Definition at line 17 of file PolyLog.h.

6.10.1.3 `template<> double prior_hessian::polylog::eulerian_polynomial< 1 > ( double z )`

Definition at line 23 of file PolyLog.h.

6.10.1.4 `template<> double prior_hessian::polylog::eulerian_polynomial< 2 > ( double z )`

Definition at line 29 of file PolyLog.h.



6.10.1.5 `template<> double prior_hessian::polylog::eulerian_polynomial< 3 > ( double z )`

Definition at line 35 of file PolyLog.h.

6.10.1.6 `template<> double prior_hessian::polylog::eulerian_polynomial< 4 > ( double z )`

Definition at line 41 of file PolyLog.h.

6.10.1.7 `template<> double prior_hessian::polylog::eulerian_polynomial< 5 > ( double z )`

Definition at line 47 of file PolyLog.h.

6.10.1.8 `template<> double prior_hessian::polylog::eulerian_polynomial< 6 > ( double z )`

Definition at line 53 of file PolyLog.h.

6.10.1.9 `template<> double prior_hessian::polylog::eulerian_polynomial< 7 > ( double z )`

Definition at line 59 of file PolyLog.h.

6.10.1.10 `template<> double prior_hessian::polylog::eulerian_polynomial< 8 > ( double z )`


Definition at line 65 of file PolyLog.h.

6.10.1.11 `template<> double prior_hessian::polylog::eulerian_polynomial< 9 > ( double z )`

Definition at line 70 of file PolyLog.h.

References `polylog()`.


Here is the call graph for this function:



### 6.10.1.12 `template<int n> double prior_hessian::polylog::polylog ( double z )`

Referenced by `prior_hessian::AMHCopula< Ndim >::d1_igen()`, `prior_hessian::AMHCopula< Ndim >::ddim_gen()`, `eulerian_polynomial< 9 >()`, and `polylog< 1 >()`.

Here is the caller graph for this function:

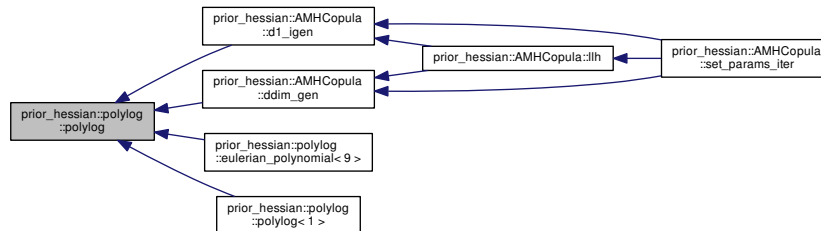


### 6.10.1.13 `template<> double prior_hessian::polylog::polylog< 1 > ( double z )`

Definition at line 120 of file PolyLog.h.

References `polylog()`.

Here is the call graph for this function:



## 7 Class Documentation

### 7.1 `prior_hessian::meta::all_dists_are_bounded< DistTs >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/BoundsAdaptedDist.h>
```

#### Static Public Attributes

- static constexpr bool `value` = `meta::logical_and_in_order`(({`detail::dist_adaptor_traits`<std::decay\_t<DistTs>>::value...})

### 7.1.1 Detailed Description

```
template<class... DistTs>
struct prior_hessian::meta::all_dists_are_bounded< DistTs >
```

Definition at line 81 of file BoundsAdaptedDist.h.

### 7.1.2 Member Data Documentation

7.1.2.1 `template<class... DistTs> constexpr bool prior_hessian::meta::all_dists_are_bounded< DistTs >::value = meta::logical_and_in_order({detail::dist_adaptor_traits<std::decay_t<DistTs>>::value...})` [static]

Definition at line 83 of file BoundsAdaptedDist.h.


The documentation for this struct was generated from the following file:

- [BoundsAdaptedDist.h](#)


## 7.2 prior\_hessian::AMHCopula< Ndim > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/AMH←
Copula.h>
```

Inheritance diagram for prior\_hessian::AMHCopula< Ndim >:



Collaboration diagram for prior\_hessian::AMHCopula< Ndim >:

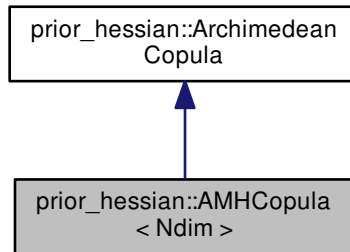

### Public Types

- using [NdimVecT](#) = arma::Col< double >::fixed< Ndim >
- using [NdimMatT](#) = arma::Mat< double >::fixed< Ndim, Ndim >

### Public Member Functions

- [AMHCopula](#) ()
- [AMHCopula](#) (double *theta*)
- double *theta* () const
- void [set\\_theta](#) (double val)
- bool [operator==](#) (const [AMHCopula](#)< Ndim > &o) const
- bool [operator!=](#) (const [AMHCopula](#)< Ndim > &o) const
- template<class Vec >  
void [set\\_params](#) (const Vec &params)
- template<class IterT >  
void [append\\_params](#) (IterT &params)
- template<class IterT >  
void [set\\_params\\_iter](#) (IterT &params)
- template<class Vec >  
double [cdf](#) (const Vec &u) const
- template<class Vec >  
double [pdf](#) (const Vec &u) const
- template<class Vec >  
double [llh](#) (const Vec &u) const
- template<class Vec >  
double [rllh](#) (const Vec &u) const
- double [rllh\\_const](#) () const
- template<class Vec >  
[NdimVecT](#) [grad](#) (const Vec &u) const
- template<class Vec >  
[NdimVecT](#) [grad2](#) (const Vec &u) const

- `template<class Vec >`  
`NdimMatT hess` (const Vec &u) const
- `template<class Vec , class Vec2 >`  
`void rllh_grad_accumulate` (const Vec &u, double &rllh, Vec2 &grad) const
- `template<class Vec , class Vec2 >`  
`void rllh_grad_grad2_accumulate` (const Vec &u, double &rllh, Vec2 &grad, Vec2 &grad2) const
- `template<class Vec , class Vec2 , class Mat >`  
`void rllh_grad_hess_accumulate` (const Vec &u, double &rllh, Vec2 &grad, Mat &hess) const
- `template<class RngT >`  
`NdimVecT sample` (RngT &rng) const
- `double gen` (double t) const
- `double ddim_gen` (double t) const
- `double igen` (double u) const
- `double d1_igen` (double u) const
- `template<class Vec >`  
`double igen_sum` (const Vec &u)

### Static Public Member Functions

- `static const StringVecT & param_names` ()
- `static constexpr IdxT num_params` ()
- `static constexpr IdxT num_dim` ()
- `static double param_lbound` ()
- `static double param_ubound` ()
- `static bool check_theta` (double val)
- `template<class Vec >`  
`static bool check_params` (const Vec &params)
- `template<class IterT >`  
`static bool check_params_iter` (IterT &params)
- `template<class Vec >`  
`static void rllh_dtheta_accumulate` (double theta, const Vec &u, double &rllh, double &dtheta)
- `template<class Vec >`  
`static void rllh_d2theta_accumulate` (double theta, const Vec &u, double &rllh, double &dtheta, double &d2theta)

#### 7.2.1 Detailed Description

```
template<int Ndim>
class prior_hessian::AMHCopula< Ndim >
```

Definition at line 18 of file AMHCopula.h.

#### 7.2.2 Member Typedef Documentation

7.2.2.1 `template<int Ndim> using prior_hessian::AMHCopula< Ndim >::NdimMatT = arma::Mat<double>::fixed<Ndim,Ndim>`

Definition at line 27 of file AMHCopula.h.

### 7.2.2 `template<int Ndim> using prior_hessian::AMHCopula< Ndim >::NdimVecT = arma::Col<double>::fixed<Ndim>`

Definition at line 26 of file AMHCopula.h.


## 7.2.3 Constructor & Destructor Documentation

### 7.2.3.1 `template<int Ndim> prior_hessian::AMHCopula< Ndim >::AMHCopula ( ) [inline]`

Definition at line 35 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::theta()`.

Here is the call graph for this function:




### 7.2.3.2 `template<int Ndim> prior_hessian::AMHCopula< Ndim >::AMHCopula ( double theta )`

Definition at line 169 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::set_theta()`.

Here is the call graph for this function:



## 7.2.4 Member Function Documentation

### 7.2.4.1 `template<int Ndim> template<class IterT > void prior_hessian::AMHCopula< Ndim >::append_params ( IterT & params ) [inline]`

Definition at line 51 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::theta()`.

Here is the call graph for this function:



#### 7.2.4.2 `template<int Ndim> template<class Vec > double prior_hessian::AMHCopula< Ndim >::cdf ( const Vec & u ) const`

Definition at line 194 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the call graph for this function:



Here is the caller graph for this function:



#### 7.2.4.3 `template<int Ndim> template<class Vec > static bool prior_hessian::AMHCopula< Ndim >::check_params ( const Vec & params ) [inline],[static]`

Definition at line 45 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::check_theta()`.

Here is the call graph for this function:








#### 7.2.4.6 `template<int Ndim> double prior_hessian::AMHCopula< Ndim >::d1_igen ( double u ) const`

Definition at line 284 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::igen_sum()`, `prior_hessian::AMHCopula< Ndim >::num_dim()`, `prior_hessian::polylog::polylog()`, and `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::llh()`, and `prior_hessian::AMHCopula< Ndim >::set_params_←iter()`.

Here is the call graph for this function:

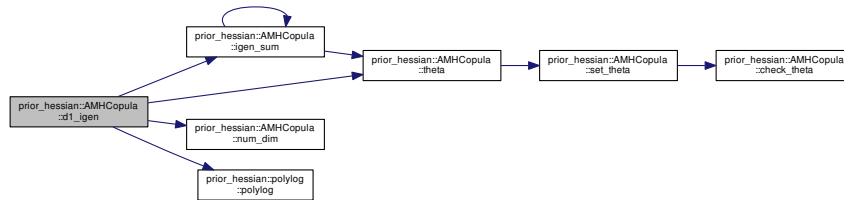

Here is the caller graph for this function:




#### 7.2.4.7 `template<int Ndim> double prior_hessian::AMHCopula< Ndim >::ddim_gen ( double t ) const`

Definition at line 270 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::num_dim()`, and `prior_hessian::polylog::polylog()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::llh()`, and `prior_hessian::AMHCopula< Ndim >::set_params_←iter()`.

Here is the call graph for this function:

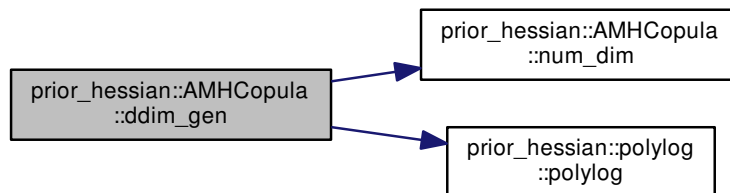

Here is the caller graph for this function:




#### 7.2.4.8 `template<int Ndim> double prior_hessian::AMHCopula< Ndim >::gen ( double t ) const`

Definition at line 265 of file AMHCopula.h.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:




#### 7.2.4.9 `template<int Ndim> template<class Vec > AMHCopula< Ndim >::NdimVecT prior_hessian::AMHCopula< Ndim >::grad ( const Vec & u ) const`

Definition at line 220 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::grad2()`, and `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.2.4.10 `template<int Ndim> template<class Vec > AMHCopula< Ndim >::NdimVecT prior_hessian::AMHCopula< Ndim >::grad2 ( const Vec & u ) const`

Definition at line 234 of file AMHCopula.h.


References `prior_hessian::square()`, and `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::grad()`, and `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the call graph for this function:



Here is the caller graph for this function:




### 7.2.4.11 `template<int Ndim> template<class Vec > AMHCopula< Ndim >::NdimMatT prior_hessian::AMHCopula< Ndim >::hess ( const Vec & u ) const`

Definition at line 248 of file AMHCopula.h.


References `prior_hessian::square()`, and `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the call graph for this function:



Here is the caller graph for this function:



### 7.2.4.12 `template<int Ndim> double prior_hessian::AMHCopula< Ndim >::igen ( double u ) const`

Definition at line 279 of file AMHCopula.h.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:




**7.2.4.13** `template<int Ndim> template<class Vec > double prior_hessian::AMHCopula< Ndim >::igen_sum ( const Vec & u ) [inline]`

Definition at line 97 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::igen_sum()`, and `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::d1_igen()`, `prior_hessian::AMHCopula< Ndim >::igen_sum()`, and `prior_hessian::AMHCopula< Ndim >::llh()`.

Here is the call graph for this function:



Here is the caller graph for this function:




**7.2.4.14** `template<int Ndim> template<class Vec > double prior_hessian::AMHCopula< Ndim >::llh ( const Vec & u ) const`

Definition at line 210 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::d1_igen()`, `prior_hessian::AMHCopula< Ndim >::ddim_gen()`, and `prior_hessian::AMHCopula< Ndim >::igen_sum()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the call graph for this function:

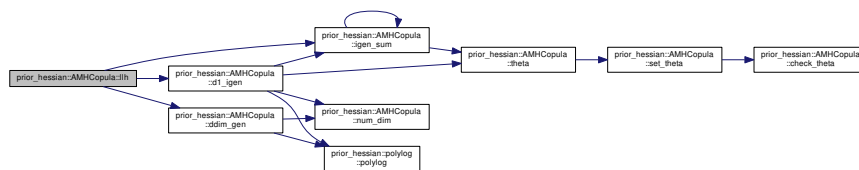

Here is the caller graph for this function:




**7.2.4.15** `template<int Ndim> static constexpr IdxT prior_hessian::AMHCopula< Ndim >::num_dim ( ) [inline], [static]`

Definition at line 30 of file AMHCopula.h.

Referenced by `prior_hessian::AMHCopula< Ndim >::d1_igen()`, and `prior_hessian::AMHCopula< Ndim >::ddim_igen()`.

Here is the caller graph for this function:



**7.2.4.16** `template<int Ndim> static constexpr IdxT prior_hessian::AMHCopula< Ndim >::num_params ( ) [inline], [static]`


Definition at line 29 of file AMHCopula.h.

**7.2.4.17** `template<int Ndim> bool prior_hessian::AMHCopula< Ndim >::operator!=( const AMHCopula< Ndim > & o ) const [inline]`

Definition at line 42 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::theta()`.

Here is the call graph for this function:




**7.2.4.18** `template<int Ndim> bool prior_hessian::AMHCopula< Ndim >::operator==( const AMHCopula< Ndim > & o ) const [inline]`

Definition at line 41 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::theta()`.

Here is the call graph for this function:



**7.2.4.19** `template<int Ndim> static double prior_hessian::AMHCopula< Ndim >::param_lbound ( ) [inline], [static]`

Definition at line 31 of file AMHCopula.h.

**7.2.4.20** `template<int Ndim> static const StringVect& prior_hessian::AMHCopula< Ndim >::param_names ( ) [inline], [static]`

Definition at line 28 of file AMHCopula.h.

**7.2.4.21** `template<int Ndim> static double prior_hessian::AMHCopula< Ndim >::param_ubound ( ) [inline], [static]`

Definition at line 32 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::check_theta()`.

Here is the call graph for this function:



7.2.4.22 `template<int Ndim> template<class Vec > double prior_hessian::AMHCopula< Ndim >::pdf ( const Vec & u ) const`

Definition at line 202 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.2.4.23 `template<int Ndim> template<class Vec > double prior_hessian::AMHCopula< Ndim >::rllh ( const Vec & u ) const`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:





7.2.4.24 `template<int Ndim> double prior_hessian::AMHCopula< Ndim >::rllh_const ( ) const`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:



7.2.4.25 `template<int Ndim> template<class Vec > static void prior_hessian::AMHCopula< Ndim >::rllh_d2theta_accumulate ( double theta, const Vec & u, double & rllh, double & dtheta, double & d2theta ) [static]`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:



7.2.4.26 `template<int Ndim> template<class Vec > static void prior_hessian::AMHCopula< Ndim >::rllh_dtheta_accumulate ( double theta, const Vec & u, double & rllh, double & dtheta ) [static]`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:



7.2.4.27 `template<int Ndim> template<class Vec , class Vec2 > void prior_hessian::AMHCopula< Ndim >::rllh_grad_accumulate ( const Vec & u, double & rllh, Vec2 & grad ) const`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.


Here is the caller graph for this function:



7.2.4.28 `template<int Ndim> template<class Vec , class Vec2 > void prior_hessian::AMHCopula< Ndim >::rllh_grad_grad2_accumulate ( const Vec & u, double & rllh, Vec2 & grad, Vec2 & grad2 ) const`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:



7.2.4.29 `template<int Ndim> template<class Vec , class Vec2 , class Mat > void prior_hessian::AMHCopula< Ndim >::rllh_grad_hess_accumulate ( const Vec & u, double & rllh, Vec2 & grad, Mat & hess ) const`

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:



7.2.4.30 `template<int Ndim> template<class RngT > AMHCopula< Ndim >::NdimVecT prior_hessian::AMHCopula< Ndim >::sample ( RngT & rng ) const`

Definition at line 596 of file AMHCopula.h.

Referenced by `prior_hessian::AMHCopula< Ndim >::set_params_iter()`.

Here is the caller graph for this function:




7.2.4.31 `template<int Ndim> template<class Vec > void prior_hessian::AMHCopula< Ndim >::set_params ( const Vec & params ) [inline]`

Definition at line 47 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::set_theta()`.

Here is the call graph for this function:




7.2.4.32 `template<int Ndim> template<class IterT > void prior_hessian::AMHCopula< Ndim >::set_params_iter ( IterT & params ) [inline]`

Definition at line 53 of file AMHCopula.h.

References `prior_hessian::AMHCopula< Ndim >::cdf()`, `prior_hessian::AMHCopula< Ndim >::d1_igen()`, `prior_hessian::AMHCopula< Ndim >::ddim_gen()`, `prior_hessian::AMHCopula< Ndim >::gen()`, `prior_hessian::AMHCopula< Ndim >::grad()`, `prior_hessian::AMHCopula< Ndim >::grad2()`, `prior_hessian::AMHCopula< Ndim >::hess()`, `prior_hessian::AMHCopula< Ndim >::igen()`, `prior_hessian::AMHCopula< Ndim >::llh()`, `prior_hessian::AMHCopula< Ndim >::pdf()`, `prior_hessian::AMHCopula< Ndim >::rllh()`, `prior_hessian::AMHCopula< Ndim >::rllh_const()`, `prior_hessian::AMHCopula< Ndim >::rllh_d2theta_accumulate()`, `prior_hessian::AMHCopula< Ndim >::rllh_dtheta_accumulate()`, `prior_hessian::AMHCopula< Ndim >::rllh_grad_accumulate()`, `prior_hessian::AMHCopula< Ndim >::rllh_grad_grad2_accumulate()`, `prior_hessian::AMHCopula< Ndim >::rllh_grad_hess_accumulate()`, `prior_hessian::AMHCopula< Ndim >::sample()`, and `prior_hessian::AMHCopula< Ndim >::set_theta()`.



Here is the caller graph for this function:

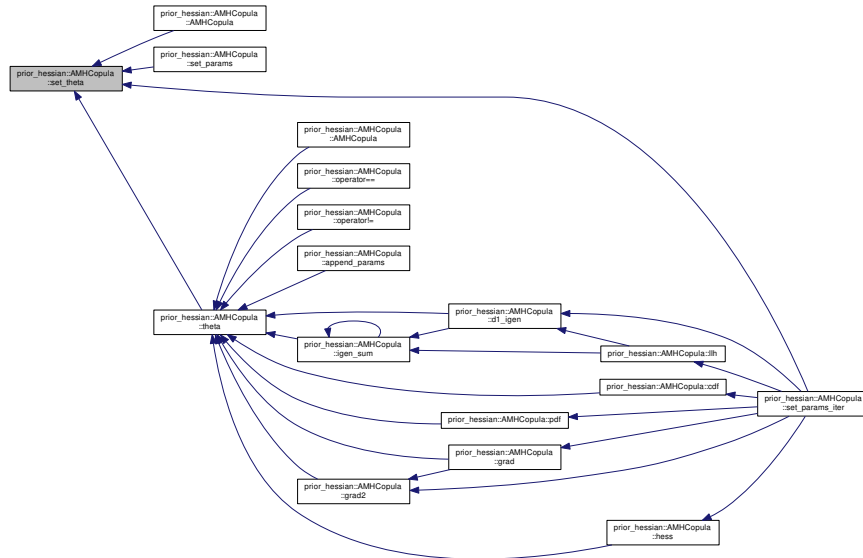


#### 7.2.4.34 `template<int Ndim> double prior_hessian::AMHCopula< Ndim >::theta ( ) const [inline]`

Definition at line 38 of file AMHCopula.h.


References `prior_hessian::AMHCopula< Ndim >::set_theta()`.

Referenced by `prior_hessian::AMHCopula< Ndim >::AMHCopula()`, `prior_hessian::AMHCopula< Ndim >::append_params()`, `prior_hessian::AMHCopula< Ndim >::cdf()`, `prior_hessian::AMHCopula< Ndim >::d1_igen()`, `prior_hessian::AMHCopula< Ndim >::grad()`, `prior_hessian::AMHCopula< Ndim >::grad2()`, `prior_hessian::AMHCopula< Ndim >::hess()`, `prior_hessian::AMHCopula< Ndim >::igen_sum()`, `prior_hessian::AMHCopula< Ndim >::operator!()`, `prior_hessian::AMHCopula< Ndim >::operator==()`, and `prior_hessian::AMHCopula< Ndim >::pdf()`.

Here is the call graph for this function:



Here is the caller graph for this function:

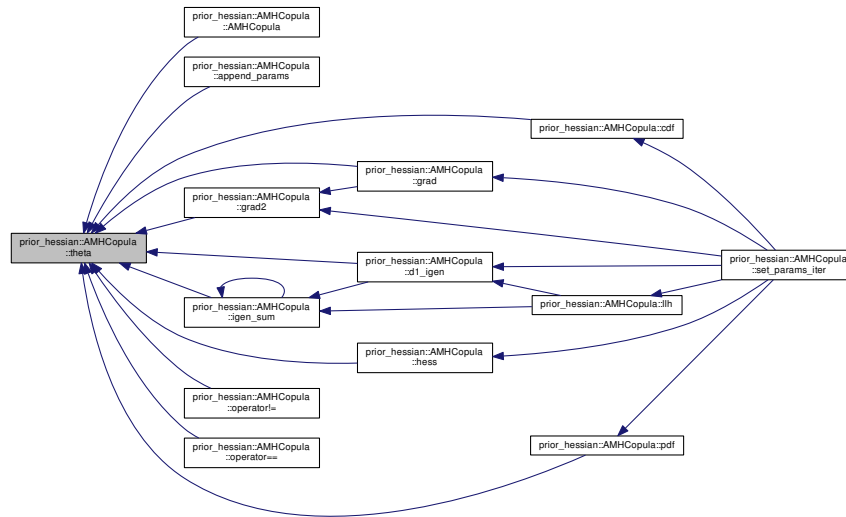


The documentation for this class was generated from the following file:

- [AMHCopula.h](#)

### 7.3 prior\_hessian::ArchimedeanCopula Class Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
ArchimedeanCopula.h>
```

Inheritance diagram for prior\_hessian::ArchimedeanCopula:

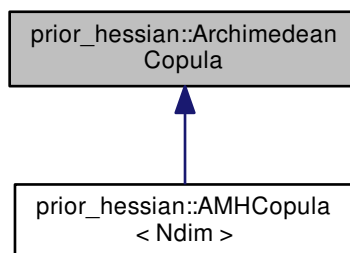

## Classes

- struct [D2\\_GenTerms](#)
- struct [D2\\_IGenTerms](#)
- struct [D2Theta\\_GenTerms](#)
- struct [D2Theta\\_IGenTerms](#)
- struct [D\\_GenTerms](#)
- struct [D\\_IGenTerms](#)
- struct [DTheta\\_GenTerms](#)
- struct [DTheta\\_IGenTerms](#)

### 7.3.1 Detailed Description

Definition at line 11 of file ArchimedeanCopula.h.


The documentation for this class was generated from the following file:

- [ArchimedeanCopula.h](#)

## 7.4 prior\_hessian::BaseDist Class Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
BaseDist.h>
```

Inheritance diagram for prior\_hessian::BaseDist:

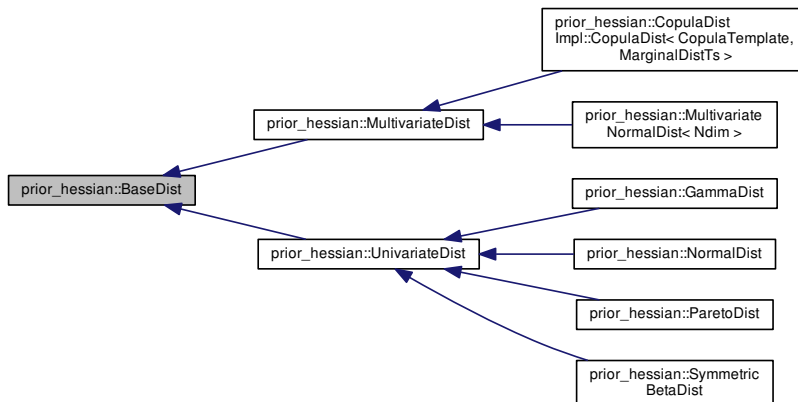

### 7.4.1 Detailed Description

Definition at line 11 of file BaseDist.h.


The documentation for this class was generated from the following file:

- [BaseDist.h](#)


7.5 prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/CompositeDist.h>
```

Inheritance diagram for prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >:

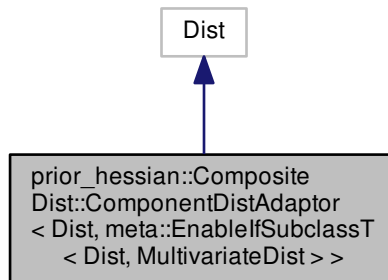

Collaboration diagram for prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >:

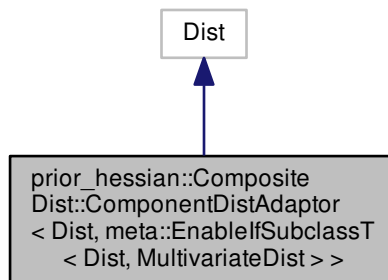

Public Types

- using [ComponentDistT](#) = Dist



## Public Member Functions

- [ComponentDistAdaptor](#) ()
- [ComponentDistAdaptor](#) (Dist &&dist)
- [ComponentDistAdaptor](#) (const Dist &dist)
- `template<class IterT >`  
void [append\\_lbound](#) (IterT &v) const
- `template<class IterT >`  
void [append\\_ubound](#) (IterT &v) const
- `template<class IterT >`  
void [append\\_global\\_lbound](#) (IterT &v) const
- `template<class IterT >`  
void [append\\_global\\_ubound](#) (IterT &v) const
- `template<class IterT >`  
void [set\\_lbound\\_from\\_iter](#) (IterT &v)
- `template<class IterT >`  
void [set\\_ubound\\_from\\_iter](#) (IterT &v)
- `template<class IterT >`  
void [set\\_bounds\\_from\\_iter](#) (IterT &lb\_iter, IterT &ub\_iter)
- `template<class IterT >`  
void [append\\_params](#) (IterT &v) const
- `template<class IterT >`  
void [append\\_params\\_lbound](#) (IterT &v) const
- `template<class IterT >`  
void [append\\_params\\_ubound](#) (IterT &v) const
- `template<class IterT >`  
void [append\\_param\\_names](#) (IterT &v) const
- `template<class IterT >`  
double [cdf\\_from\\_iter](#) (IterT &u) const
- `template<class IterT >`  
double [pdf\\_from\\_iter](#) (IterT &u) const
- `template<class IterT >`  
double [llh\\_from\\_iter](#) (IterT &u) const
- `template<class IterT >`  
double [rllh\\_from\\_iter](#) (IterT &u) const
- void [grad\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g, [IdxT](#) &k) const
- void [grad2\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g2, [IdxT](#) &k) const
- void [hess\\_accumulate\\_idx](#) (const [VecT](#) &u, [MatT](#) &h, [IdxT](#) &k) const
- void [grad\\_grad2\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g, [VecT](#) &g2, [IdxT](#) &k) const
- void [grad\\_hess\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g, [MatT](#) &h, [IdxT](#) &k) const
- `template<class RngT, class IterT >`  
void [append\\_sample](#) (RngT &rng, IterT &v) const

### 7.5.1 Detailed Description

```
template<class Dist>
class prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >
```

Definition at line 696 of file CompositeDist.h.

### 7.5.2 Member Typedef Documentation

7.5.2.1 `template<class Dist > using prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::ComponentDistT = Dist`

Definition at line 698 of file CompositeDist.h.

### 7.5.3 Constructor & Destructor Documentation

7.5.3.1 `template<class Dist > prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::ComponentDistAdaptor ( ) [inline]`

Definition at line 699 of file CompositeDist.h.

7.5.3.2 `template<class Dist > prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::ComponentDistAdaptor ( Dist && dist ) [inline], [explicit]`

Definition at line 700 of file CompositeDist.h.

7.5.3.3 `template<class Dist > prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::ComponentDistAdaptor ( const Dist & dist ) [inline], [explicit]`

Definition at line 701 of file CompositeDist.h.


### 7.5.4 Member Function Documentation

7.5.4.1 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_global_lbound ( IterT & v ) const [inline]`

Definition at line 709 of file CompositeDist.h.

References prior\_hessian::CompositeDist::global\_lbound().

Here is the call graph for this function:




7.5.4.2 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_global_ubound ( IterT & v ) const`  
`[inline]`

Definition at line 712 of file CompositeDist.h.

References `prior_hessian::CompositeDist::global_ubound()`.

Here is the call graph for this function:




7.5.4.3 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_lbound ( IterT & v ) const` `[inline]`

Definition at line 703 of file CompositeDist.h.

References `prior_hessian::CompositeDist::lbound()`.

Here is the call graph for this function:




7.5.4.4 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_param_names ( IterT & v ) const [inline]`

Definition at line 750 of file CompositeDist.h.

References prior\_hessian::CompositeDist::param\_names().

Here is the call graph for this function:

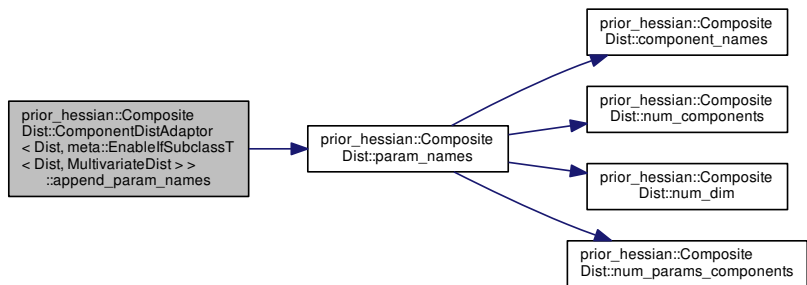


7.5.4.5 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_params ( IterT & v ) const [inline]`

Definition at line 741 of file CompositeDist.h.

References prior\_hessian::CompositeDist::params().

Here is the call graph for this function:



7.5.4.6 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_params_lbound ( IterT & v ) const [inline]`

Definition at line 744 of file CompositeDist.h.

7.5.4.7 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_params_ubound ( IterT & v ) const [inline]`


Definition at line 747 of file CompositeDist.h.

7.5.4.8 `template<class Dist > template<class RngT, class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_sample ( RngT & rng, IterT & v ) const [inline]`

Definition at line 827 of file CompositeDist.h.

References `prior_hessian::CompositeDist::sample()`.

Here is the call graph for this function:




7.5.4.9 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_ubound ( IterT & v ) const [inline]`

Definition at line 706 of file CompositeDist.h.

References `prior_hessian::CompositeDist::ubound()`.

Here is the call graph for this function:




7.5.4.10 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>::cdf_from_iter ( IterT & u ) const [inline]`

Definition at line 753 of file CompositeDist.h.

References prior\_hessian::CompositeDist::cdf().

Here is the call graph for this function:




7.5.4.11 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>::grad2_accumulate_idx ( const VecT & u, VecT & g2, IdxT & k ) const [inline]`

Definition at line 792 of file CompositeDist.h.

References prior\_hessian::CompositeDist::grad2().

Here is the call graph for this function:




7.5.4.12 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>::grad_accumulate_idx ( const VecT & u, VecT & g, IdxT & k ) const [inline]`

Definition at line 785 of file CompositeDist.h.

References prior\_hessian::CompositeDist::grad().

Here is the call graph for this function:




**7.5.4.13** `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad_grad2_accumulate_idx ( const VecT & u, VecT & g, VecT & g2, IdxT & k ) const [inline]`

Definition at line 807 of file CompositeDist.h.

References `prior_hessian::CompositeDist::grad()`, and `prior_hessian::CompositeDist::grad2()`.

Here is the call graph for this function:




**7.5.4.14** `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad_hess_accumulate_idx ( const VecT & u, VecT & g, MatT & h, IdxT & k ) const [inline]`

Definition at line 816 of file CompositeDist.h.

References `prior_hessian::CompositeDist::grad()`, and `prior_hessian::CompositeDist::hess()`.

Here is the call graph for this function:




7.5.4.15 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::hess_accumulate_idx ( const VecT & u, MatT & h, IdxT & k ) const [inline]`

Definition at line 799 of file CompositeDist.h.

References prior\_hessian::CompositeDist::hess().

Here is the call graph for this function:




7.5.4.16 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::llh_from_iter ( IterT & u ) const [inline]`

Definition at line 769 of file CompositeDist.h.

References prior\_hessian::CompositeDist::llh().

Here is the call graph for this function:




7.5.4.17 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::pdf_from_iter ( IterT & u ) const [inline]`

Definition at line 761 of file CompositeDist.h.

References prior\_hessian::CompositeDist::pdf().



Here is the call graph for this function:




7.5.4.18 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::rllh_from_iter ( IterT & u ) const [inline]`

Definition at line 777 of file CompositeDist.h.

References `prior_hessian::CompositeDist::rllh()`.

Here is the call graph for this function:




7.5.4.19 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::set_bounds_from_iter ( IterT & lb_iter, IterT & ub_iter ) [inline]`

Definition at line 731 of file CompositeDist.h.

References `prior_hessian::CompositeDist::set_bounds()`.

Here is the call graph for this function:




7.5.4.20 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::set_lbound_from_iter ( IterT & v ) [inline]`

Definition at line 715 of file CompositeDist.h.

References prior\_hessian::CompositeDist::set\_lbound().

Here is the call graph for this function:




7.5.4.21 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::set_ubound_from_iter ( IterT & v ) [inline]`

Definition at line 723 of file CompositeDist.h.

References prior\_hessian::CompositeDist::set\_ubound().

Here is the call graph for this function:




The documentation for this class was generated from the following file:

- [CompositeDist.h](#)


## 7.6 prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/CompositeDist.h>
```

Inheritance diagram for prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >:

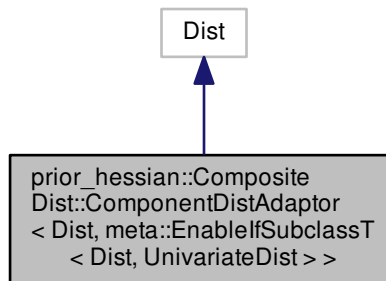

Collaboration diagram for prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >:

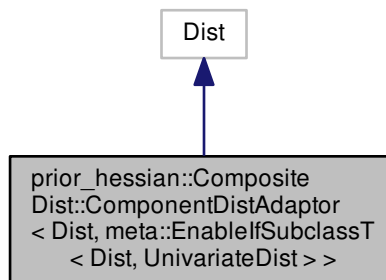

## Public Types

- using [ComponentDistT](#) = Dist

## Public Member Functions

- [ComponentDistAdaptor](#) ()
- [ComponentDistAdaptor](#) (Dist &&dist)
- [ComponentDistAdaptor](#) (const Dist &dist)
- template<class IterT >  
void [append\\_lbound](#) (IterT &v) const
- template<class IterT >  
void [append\\_ubound](#) (IterT &v) const
- template<class IterT >  
void [append\\_global\\_lbound](#) (IterT &v) const
- template<class IterT >  
void [append\\_global\\_ubound](#) (IterT &v) const
- template<class IterT >  
void [set\\_lbound\\_from\\_iter](#) (IterT &lbounds)
- template<class IterT >  
void [set\\_ubound\\_from\\_iter](#) (IterT &ubounds)
- template<class IterT >  
void [set\\_bounds\\_from\\_iter](#) (IterT &lbounds, IterT &ubounds)
- template<class IterT >  
void [append\\_params](#) (IterT &v) const
- template<class IterT >  
void [append\\_params\\_lbound](#) (IterT &v) const
- template<class IterT >  
void [append\\_params\\_ubound](#) (IterT &v) const
- template<class IterT >  
void [append\\_param\\_names](#) (IterT &v) const
- template<class IterT >  
double [cdf\\_from\\_iter](#) (IterT &u) const
- template<class IterT >  
double [pdf\\_from\\_iter](#) (IterT &u) const
- template<class IterT >  
double [llh\\_from\\_iter](#) (IterT &u) const
- template<class IterT >  
double [rllh\\_from\\_iter](#) (IterT &u) const
- void [grad\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g, [IdxT](#) &k) const
- void [grad2\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g2, [IdxT](#) &k) const
- void [hess\\_accumulate\\_idx](#) (const [VecT](#) &u, [MatT](#) &h, [IdxT](#) &k) const
- void [grad\\_grad2\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g, [VecT](#) &g2, [IdxT](#) &k) const
- void [grad\\_hess\\_accumulate\\_idx](#) (const [VecT](#) &u, [VecT](#) &g, [MatT](#) &h, [IdxT](#) &k) const
- template<class RngT, class IterT >  
void [append\\_sample](#) (RngT &rng, IterT &iter) const

## 7.6.1 Detailed Description

```
template<class Dist>
```

```
class prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >
```

Definition at line 626 of file CompositeDist.h.

## 7.6.2 Member Typedef Documentation

7.6.2.1 `template<class Dist > using prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::ComponentDistT = Dist`

Definition at line 628 of file CompositeDist.h.

## 7.6.3 Constructor & Destructor Documentation

7.6.3.1 `template<class Dist > prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::ComponentDistAdaptor ( ) [inline]`

Definition at line 629 of file CompositeDist.h.

7.6.3.2 `template<class Dist > prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::ComponentDistAdaptor ( Dist && dist ) [inline], [explicit]`

Definition at line 630 of file CompositeDist.h.

7.6.3.3 `template<class Dist > prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::ComponentDistAdaptor ( const Dist & dist ) [inline], [explicit]`

Definition at line 631 of file CompositeDist.h.


## 7.6.4 Member Function Documentation

7.6.4.1 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_global_lbound ( IterT & v ) const [inline]`

Definition at line 635 of file CompositeDist.h.

References `prior_hessian::CompositeDist::lbound()`.

Here is the call graph for this function:




7.6.4.2 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_global_ubound ( IterT & v ) const [inline]`

Definition at line 636 of file CompositeDist.h.

References prior\_hessian::CompositeDist::ubound().

Here is the call graph for this function:




7.6.4.3 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_lbound ( IterT & v ) const [inline]`

Definition at line 633 of file CompositeDist.h.

References prior\_hessian::CompositeDist::lbound().

Here is the call graph for this function:




7.6.4.4 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_param_names ( IterT & v ) const [inline]`

Definition at line 652 of file CompositeDist.h.

References prior\_hessian::CompositeDist::param\_names().

Here is the call graph for this function:

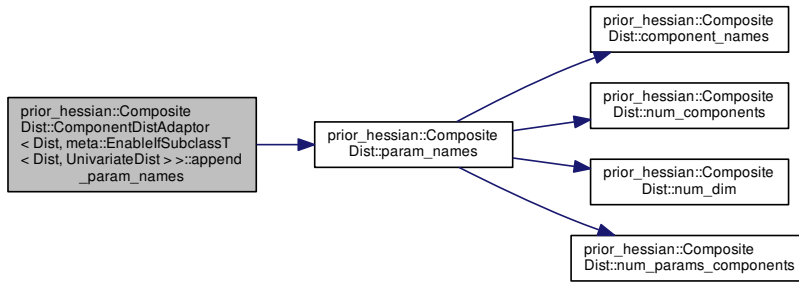


**7.6.4.5** `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_params ( IterT & v ) const [inline]`

Definition at line 643 of file CompositeDist.h.

References `prior_hessian::CompositeDist::params()`.

Here is the call graph for this function:



**7.6.4.6** `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_params_lbound ( IterT & v ) const [inline]`

Definition at line 646 of file CompositeDist.h.

**7.6.4.7** `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_params_ubound ( IterT & v ) const [inline]`


Definition at line 649 of file CompositeDist.h.

7.6.4.8 `template<class Dist > template<class RngT, class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>::append_sample ( RngT & rng, IterT & iter ) const [inline]`

Definition at line 691 of file CompositeDist.h.

References `prior_hessian::CompositeDist::sample()`.

Here is the call graph for this function:




7.6.4.9 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>::append_ubound ( IterT & v ) const [inline]`

Definition at line 634 of file CompositeDist.h.

References `prior_hessian::CompositeDist::ubound()`.

Here is the call graph for this function:




7.6.4.10 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>::cdf_from_iter ( IterT & u ) const [inline]`

Definition at line 655 of file CompositeDist.h.

References `prior_hessian::CompositeDist::cdf()`.



Here is the call graph for this function:




7.6.4.11 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad2_accumulate_idx ( const VecT & u, VecT & g2, IdxT & k ) const [inline]`

Definition at line 666 of file CompositeDist.h.

References `prior_hessian::CompositeDist::grad2()`.

Here is the call graph for this function:




7.6.4.12 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad_accumulate_idx ( const VecT & u, VecT & g, IdxT & k ) const [inline]`

Definition at line 660 of file CompositeDist.h.

References `prior_hessian::CompositeDist::grad()`.

Here is the call graph for this function:




7.6.4.13 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad_grad2_accumulate_idx ( const VecT & u, VecT & g, VecT & g2, IdxT & k ) const [inline]`

Definition at line 678 of file CompositeDist.h.

References prior\_hessian::CompositeDist::grad\_grad2\_accumulate().

Here is the call graph for this function:




7.6.4.14 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad_hess_accumulate_idx ( const VecT & u, VecT & g, MatT & h, IdxT & k ) const [inline]`

Definition at line 684 of file CompositeDist.h.

References prior\_hessian::CompositeDist::grad\_grad2\_accumulate().

Here is the call graph for this function:




7.6.4.15 `template<class Dist > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::hess_accumulate_idx ( const VecT & u, MatT & h, IdxT & k ) const [inline]`

Definition at line 672 of file CompositeDist.h.

References `prior_hessian::CompositeDist::grad2()`.

Here is the call graph for this function:




7.6.4.16 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::llh_from_iter ( IterT & u ) const [inline]`

Definition at line 657 of file CompositeDist.h.

References `prior_hessian::CompositeDist::llh()`.

Here is the call graph for this function:




7.6.4.17 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::pdf_from_iter ( IterT & u ) const [inline]`

Definition at line 656 of file CompositeDist.h.

References `prior_hessian::CompositeDist::pdf()`.

Here is the call graph for this function:




7.6.4.18 `template<class Dist > template<class IterT > double prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::rllh_from_iter ( IterT & u ) const [inline]`

Definition at line 658 of file CompositeDist.h.

References prior\_hessian::CompositeDist::rllh().

Here is the call graph for this function:




7.6.4.19 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::set_bounds_from_iter ( IterT & lbounds, IterT & ubounds ) [inline]`

Definition at line 640 of file CompositeDist.h.

References prior\_hessian::CompositeDist::set\_bounds().

Here is the call graph for this function:




7.6.4.20 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::set_lbound_from_iter ( IterT & lbounds ) [inline]`

Definition at line 637 of file CompositeDist.h.

References `prior_hessian::CompositeDist::set_lbound()`.

Here is the call graph for this function:




7.6.4.21 `template<class Dist > template<class IterT > void prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::set_ubound_from_iter ( IterT & ubounds ) [inline]`

Definition at line 638 of file CompositeDist.h.

References `prior_hessian::CompositeDist::set_ubound()`.

Here is the call graph for this function:



The documentation for this class was generated from the following file:

- [CompositeDist.h](#)

## 7.7 prior\_hessian::CompositeDist Class Reference

A probability distribution made of independent component distributions composing groups of 1 or more variables.

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
CompositeDist.h>
```

### Classes

- class [ComponentDistAdaptor](#)
- class [ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >](#)
- class [ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >](#)

### Public Types

- using [AnyRngT](#) = any\_rng::AnyRng< std::size\_t >
- template<class DistT >  
using [ComponentDistT](#) = [ComponentDistAdaptor](#)< [BoundsAdaptedDistT](#)< std::remove\_reference\_t< DistT >>>

## Public Member Functions

- [CompositeDist](#) ()
- `template<class... Ts, meta::ConstructableIfAllAreNotTupleAndAreNotT< CompositeDist, Ts... > = true>`  
[CompositeDist](#) (Ts &&...dists)  
*Construct from a variadic list of subclasses of [UnivariateDist](#)'s or [MultivariateDist](#)'s.*
- `template<class... Ts>`  
[CompositeDist](#) (std::tuple< Ts... > &&dist\_tuple)  
*Construct from a rvalue tuple of subclasses of [UnivariateDist](#)'s or [MultivariateDist](#)'s.*
- `template<class... Ts>`  
[CompositeDist](#) (const std::tuple< Ts... > &dist\_tuple)  
*Construct from a lvalue tuple of subclasses of [UnivariateDist](#)'s or [MultivariateDist](#)'s.*
- `void` [initialize](#) ()
- `void` [initialize](#) (const std::tuple<> &)  
*Initialize to the empty state.*
- `void` [initialize](#) (std::tuple<> &&)  
*Initialize of an empty lvalue tuple produces the empty state.*
- `template<class... Ts, typename = meta::EnableIfAllAreNotTupleT<Ts...>>`  
`void` [initialize](#) (Ts &&...dists)  
*Initialize of an empty rvalue tuple produces the empty state.*
- `template<class... Ts, typename = meta::EnableIfAllAreNotTupleT<Ts...>>`  
`void` [initialize](#) (std::tuple< Ts... > &&dist\_tuple)
- `template<class... Ts, typename = meta::EnableIfNonEmpty<Ts...>>`  
`void` [initialize](#) (const std::tuple< Ts... > &dist\_tuple)
- [CompositeDist](#) (const [CompositeDist](#) &)
- [CompositeDist](#) & `operator=` (const [CompositeDist](#) &)
- [CompositeDist](#) ([CompositeDist](#) &&)
- [CompositeDist](#) & `operator=` ([CompositeDist](#) &&)
- `void` [clear](#) ()
- `template<class... Ts>`  
`const` std::tuple< Ts... > & [get\\_dist\\_tuple](#) () `const`
- `bool` [is\\_empty](#) () `const`
- `operator bool` () `const`
- `IdxT` [num\\_components](#) () `const`
- `TypeInfoVecT` [component\\_types](#) () `const`
- `const` `StringVecT` & [component\\_names](#) () `const`
- `template<class StringVec >`  
`void` [set\\_component\\_names](#) (`StringVec` &&names)
- `bool` `operator==` (const [CompositeDist](#) &o) `const`
- `bool` `operator!=` (const [CompositeDist](#) &o) `const`
- `IdxT` [num\\_dim](#) () `const`
- `UVecT` [num\\_dim\\_components](#) () `const`
- `const` `StringVecT` & [dim\\_variables](#) () `const`
- `template<class StringVec >`  
`void` [set\\_dim\\_variables](#) (`StringVec` &&vars)
- `VecT` [lbound](#) () `const`
- `VecT` [ubound](#) () `const`
- `VecT` [global\\_lbound](#) () `const`
- `VecT` [global\\_ubound](#) () `const`
- `bool` [in\\_bounds](#) (const `VecT` &u) `const`

- bool `in_bounds_all` (const `MatT` &u) const
- void `set_lbound` (const `VecT` &new\_bound)
- void `set_ubound` (const `VecT` &new\_bound)
- void `set_bounds` (const `VecT` &new\_lbound, const `VecT` &new\_ubound)
- `IdxT` `num_params` () const
- `UVecT` `num_params_components` () const
- `VecT` `params` () const
- void `set_params` (const `VecT` &new\_params)
- bool `check_params` (const `VecT` &new\_params) const
- `VecT` `params_lbound` () const
- `VecT` `params_ubound` () const
- `std::vector< VecT >` `params_components` () const
- const `StringVecT` & `param_names` () const
- template<class `StringVec` >  
void `set_param_names` (`StringVec` &&vars)
- bool `has_dim_variable` (const `std::string` &name) const
- `IdxT` `get_dim_variable_index` (const `std::string` &name) const
- void `rename_dim_variable` (const `std::string` &old\_name, `std::string` new\_name)
- bool `has_param` (const `std::string` &name) const
- double `get_param_value` (const `std::string` &name) const
- `IdxT` `get_param_index` (const `std::string` &name) const
- void `set_param_value` (const `std::string` &name, double value)
- void `rename_param` (const `std::string` &old\_name, `std::string` new\_name)
- double `cdf` (const `VecT` &u) const
- double `pdf` (const `VecT` &u) const
- double `llh` (const `VecT` &u) const
- double `rllh` (const `VecT` &u) const
- `VecT` `grad` (const `VecT` &u) const
- `VecT` `grad2` (const `VecT` &u) const
- `MatT` `hess` (const `VecT` &u) const
- void `grad_accumulate` (const `VecT` &theta, `VecT` &grad) const
- void `grad2_accumulate` (const `VecT` &theta, `VecT` &grad2) const
- void `hess_accumulate` (const `VecT` &theta, `MatT` &hess) const
- void `grad_grad2_accumulate` (const `VecT` &theta, `VecT` &grad, `VecT` &grad2) const
- void `grad_hess_accumulate` (const `VecT` &theta, `VecT` &grad, `MatT` &hess) const
- `VecT` `make_zero_grad` () const
- `MatT` `make_zero_hess` () const
- `VecT` `sample` (`AnyRngT` &rng) const
- `VecT` `sample` (`AnyRngT` &&rng) const
- `MatT` `sample` (`AnyRngT` &rng, `IdxT` num\_samples) const
- `MatT` `sample` (`AnyRngT` &&rng, `IdxT` num\_samples) const
- template<class `RngT` >  
`VecT` `sample` (`RngT` &&rng) const
- template<class `RngT` >  
`MatT` `sample` (`RngT` &&rng, `IdxT` num\_samples) const
- `VecT` `llh_components` (const `VecT` &u) const
- `VecT` `rllh_components` (const `VecT` &u) const



## Static Public Member Functions

- `template<class DistT >`  
`static meta::ReturnIfInstantiatedFromT< DistT, DistT, ComponentDistAdaptor > make\_component\_dist (DistT &&dist)`
- `template<class DistT >`  
`static meta::ReturnIfNotInstantiatedFromT< ComponentDistT< DistT >, DistT, ComponentDistAdaptor > make\_component\_dist (DistT &&dist)`
- `template<class... Ts>`  
`static std::tuple< ComponentDistT< Ts >... > make\_component\_dist\_tuple (const std::tuple< Ts... > &dists)`
- `template<class... Ts, std::size_t... I>`  
`static std::tuple< ComponentDistT< Ts >... > make\_component\_dist\_tuple (const std::tuple< Ts... > &dists, std::index_sequence< I... >)`
- `template<class... Ts>`  
`static std::tuple< ComponentDistT< Ts >... > make\_component\_dist\_tuple (std::tuple< Ts... > &&dists)`
- `template<class... Ts, std::size_t... I>`  
`static std::tuple< ComponentDistT< Ts >... > make\_component\_dist\_tuple (std::tuple< Ts... > &&dists, std::index_sequence< I... >)`

### 7.7.1 Detailed Description

A probability distribution made of independent component distributions composing groups of 1 or more variables.

[CompositeDist](#) is a world unto itself.

```
class UnivariateDistInterface { static constexpr IdxT num_dim(); static constexpr IdxT num_params(); static
const StringVecT param_names; double lbound() const; double ubound() const; void set_bounds(double lbound, double
ubound); void set_lbound(double lbound); void set_ubound(double ubound); double get_param(int idx) const; void set_
_param(int idx, double val); double cdf(double x) const; double icdf(double u) const; double pdf(double x) const; double
llh(double x) const; double rllh(double x) const; double grad(double x) const; double grad2(double x) const; void grad_
grad2_accumulate(double x, double &g, double &g2) const; template< class RngT > double sample(RngT &rng) const;
}
```

`dim_variables` and `param_names` are lazily computed. If they are not accessed, they are not created.

Definition at line 60 of file `CompositeDist.h`.

### 7.7.2 Class Documentation

#### 7.7.2.1 class `prior_hessian::CompositeDist::ComponentDistAdaptor`

```
template<class DistT, typename Enable = void>
class prior_hessian::CompositeDist::ComponentDistAdaptor< DistT, Enable >
```

Definition at line 64 of file `CompositeDist.h`.

## 7.7.3 Member Typedef Documentation

## 7.7.3.1 using prior\_hessian::CompositeDist::AnyRngT = any\_rng::AnyRng&lt;std::size\_t&gt;

Definition at line 67 of file CompositeDist.h.

## 7.7.3.2 template&lt;class DistT &gt; using prior\_hessian::CompositeDist::ComponentDistT = ComponentDistAdaptor&lt;BoundsAdaptedDistT&lt;std::remove\_reference\_t&lt;DistT&gt;&gt;&gt;&gt;

Definition at line 844 of file CompositeDist.h.

## 7.7.4 Constructor &amp; Destructor Documentation

## 7.7.4.1 prior\_hessian::CompositeDist::CompositeDist ( )

Definition at line 13 of file CompositeDist.cpp.

Referenced by initialize().

Here is the caller graph for this function:



## 7.7.4.2 template&lt;class... Ts, meta::ConstructableIfAllAreNotTupleAndAreNotT&lt; CompositeDist, Ts... &gt; = true&gt; prior\_hessian::CompositeDist::CompositeDist ( Ts &amp;&amp;... dists ) [inline],[explicit]

Construct from a variadic list of subclasses of [UnivariateDist](#)'s or [MultivariateDist](#)'s.

Definition at line 73 of file CompositeDist.h.

References [make\\_component\\_dist\(\)](#).

Here is the call graph for this function:



**7.7.4.3** `template<class... Ts> prior_hessian::CompositeDist::CompositeDist ( std::tuple< Ts... > && dist_tuple ) [inline], [explicit]`

Construct from a rvalue tuple of subclasses of [UnivariateDist](#)'s or [MultivariateDist](#)'s.

Definition at line 79 of file `CompositeDist.h`.

References `make_component_dist_tuple()`.

Here is the call graph for this function:



**7.7.4.4** `template<class... Ts> prior_hessian::CompositeDist::CompositeDist ( const std::tuple< Ts... > & dist_tuple ) [inline], [explicit]`

Construct from a lvalue tuple of subclasses of [UnivariateDist](#)'s or [MultivariateDist](#)'s.

Definition at line 85 of file `CompositeDist.h`.

References `make_component_dist_tuple()`.

Here is the call graph for this function:



**7.7.4.5** `prior_hessian::CompositeDist::CompositeDist ( const CompositeDist & o )`

Definition at line 17 of file `CompositeDist.cpp`.

**7.7.4.6** `prior_hessian::CompositeDist::CompositeDist ( CompositeDist && o )`

Definition at line 28 of file `CompositeDist.cpp`.


## 7.7.5 Member Function Documentation

## 7.7.5.1 double prior\_hessian::CompositeDist::cdf ( const VecT &amp; u ) const [inline]

Definition at line 186 of file CompositeDist.h.

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::cdf\_from\_iter(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::cdf\_from\_iter(), and rllh\_components().

Here is the caller graph for this function:

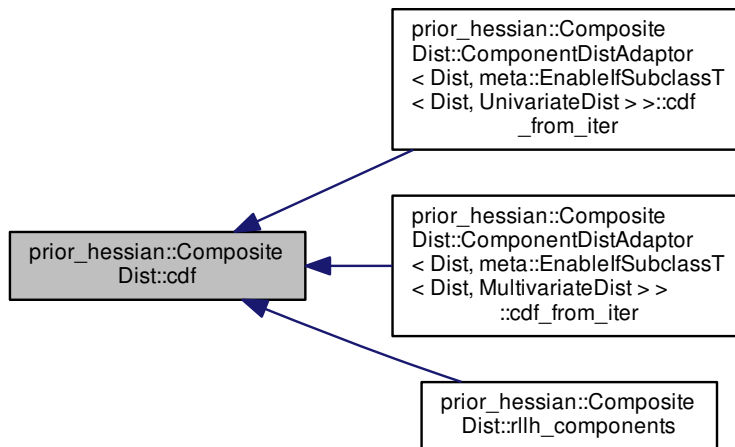

## 7.7.5.2 bool prior\_hessian::CompositeDist::check\_params ( const VecT &amp; new\_params ) const [inline]

Definition at line 163 of file CompositeDist.h.

Referenced by rllh\_components().

Here is the caller graph for this function:




### 7.7.5.3 void prior\_hessian::CompositeDist::clear ( )

Definition at line 38 of file CompositeDist.cpp.

Referenced by initialize().

Here is the caller graph for this function:




### 7.7.5.4 const StringVecT & prior\_hessian::CompositeDist::component\_names ( ) const

Definition at line 108 of file CompositeDist.cpp.

Referenced by `component_types()`, `prior_hessian::operator<<()`, and `param_names()`.

Here is the caller graph for this function:

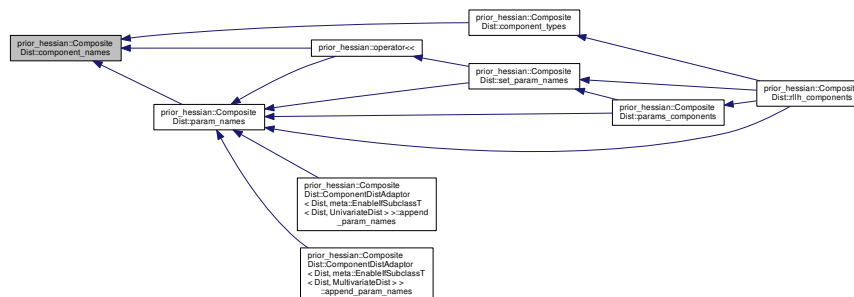


### 7.7.5.5 TypeInfoVecT prior\_hessian::CompositeDist::component\_types ( ) const [inline]

Definition at line 127 of file CompositeDist.h.

References `component_names()`, `operator==()`, and `set_component_names()`.

Referenced by `rllh_components()`.

Here is the call graph for this function:

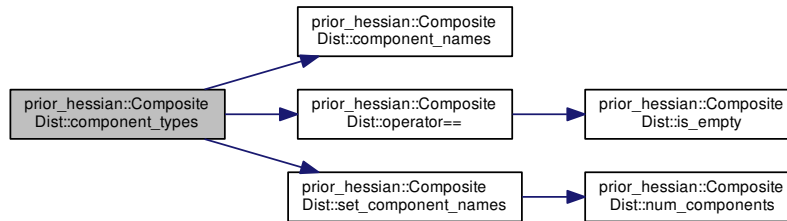

Here is the caller graph for this function:




#### 7.7.5.6 const StringVecT & prior\_hessian::CompositeDist::dim\_variables ( ) const

Definition at line 114 of file CompositeDist.cpp.

Referenced by num\_dim\_components(), and prior\_hessian::operator<<().

Here is the caller graph for this function:




#### 7.7.5.7 IdxT prior\_hessian::CompositeDist::get\_dim\_variable\_index ( const std::string & name ) const

Definition at line 175 of file CompositeDist.cpp.

Referenced by params\_components().

Here is the caller graph for this function:




7.7.5.8 `template<class... Ts> const std::tuple< Ts... > & prior_hessian::CompositeDist::get_dist_tuple ( ) const`

Definition at line 930 of file CompositeDist.h.

Referenced by initialize().

Here is the caller graph for this function:




7.7.5.9 `IdxT prior_hessian::CompositeDist::get_param_index ( const std::string & name ) const`

Definition at line 221 of file CompositeDist.cpp.

Referenced by params\_components().

Here is the caller graph for this function:




## 7.7.5.10 double prior\_hessian::CompositeDist::get\_param\_value ( const std::string &amp; name ) const

Definition at line 209 of file CompositeDist.cpp.


References params().

Referenced by params\_components().

Here is the call graph for this function:



Here is the caller graph for this function:




## 7.7.5.11 VecT prior\_hessian::CompositeDist::global\_lbound ( ) const [inline]

Definition at line 145 of file CompositeDist.h.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_global_lbound()`, `prior_hessian::operator<<()`, and `rllh_components()`.

Here is the caller graph for this function:






### 7.7.5.12 VecT prior\_hessian::CompositeDist::global\_ubound ( ) const [inline]

Definition at line 146 of file CompositeDist.h.

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append\_global\_ubound(), prior\_hessian::operator<<(), and rllh\_components().

Here is the caller graph for this function:




### 7.7.5.13 VecT prior\_hessian::CompositeDist::grad ( const VecT & u ) const [inline]

Definition at line 190 of file CompositeDist.h.


References num\_dim().

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad\_grad2\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad\_hess\_accumulate\_idx(), and rllh\_components().

Here is the call graph for this function:



Here is the caller graph for this function:

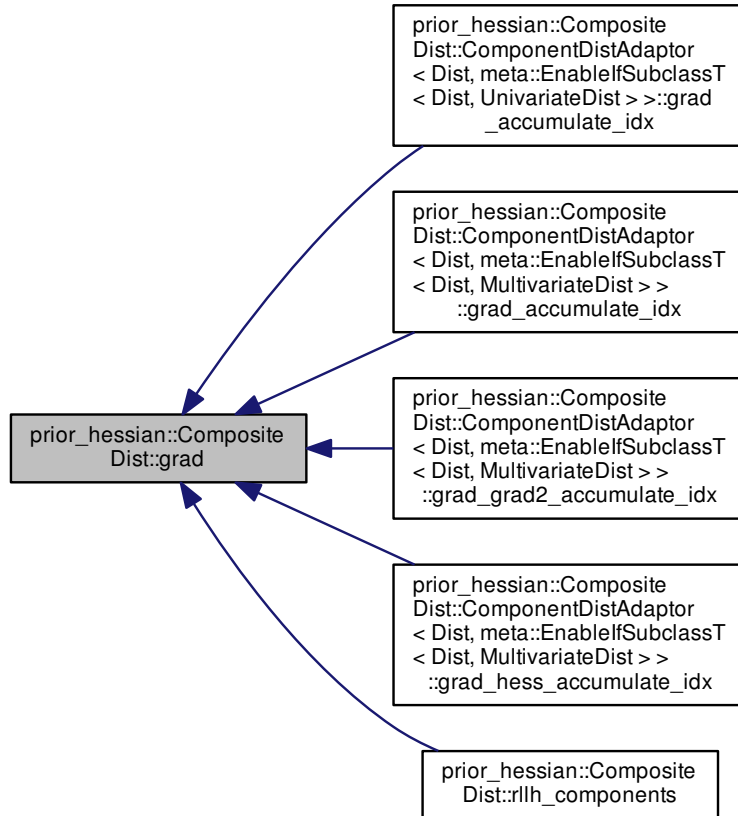


#### 7.7.5.14 VecT prior\_hessian::CompositeDist::grad2 ( const VecT & u ) const [inline]

Definition at line 197 of file CompositeDist.h.


References num\_dim().

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad2\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad2\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad\_grad2\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::hess\_accumulate\_idx(), and rllh\_components().

Here is the call graph for this function:



Here is the caller graph for this function:

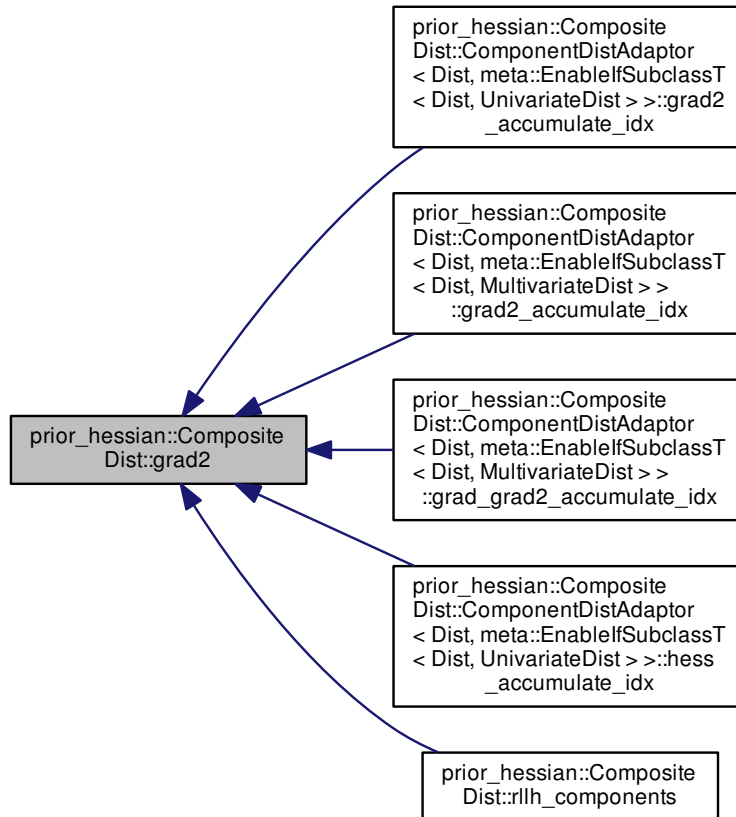


```
7.7.5.15 void prior_hessian::CompositeDist::grad2_accumulate ( const VecT & theta, VecT & grad2 ) const [inline]
```

Definition at line 219 of file CompositeDist.h.

Referenced by rllh\_components().

Here is the caller graph for this function:



7.7.5.16 void prior\_hessian::CompositeDist::grad\_accumulate ( const VecT & *theta*, VecT & *grad* ) const [inline]

Definition at line 218 of file CompositeDist.h.

Referenced by rllh\_components().

Here is the caller graph for this function:




7.7.5.17 void prior\_hessian::CompositeDist::grad\_grad2\_accumulate ( const VecT & *theta*, VecT & *grad*, VecT & *grad2* ) const [inline]

Definition at line 221 of file CompositeDist.h.

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad\_grad2\_accumulate\_idx(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::grad\_hess\_accumulate\_idx(), and rllh\_components().

Here is the caller graph for this function:

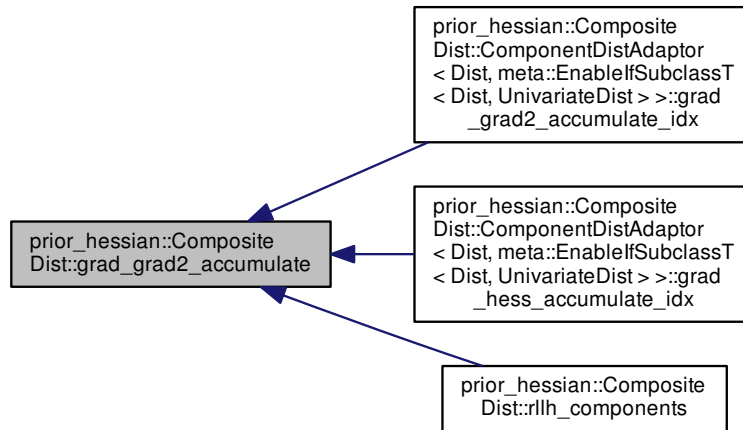


**7.7.5.18** `void prior_hessian::CompositeDist::grad_hess_accumulate ( const VecT & theta, VecT & grad, MatT & hess ) const [inline]`

Definition at line 224 of file CompositeDist.h.

Referenced by `rllh_components()`.

Here is the caller graph for this function:




**7.7.5.19** `bool prior_hessian::CompositeDist::has_dim_variable ( const std::string & name ) const`

Definition at line 169 of file CompositeDist.cpp.

Referenced by `params_components()`.

Here is the caller graph for this function:




#### 7.7.5.20 `bool prior_hessian::CompositeDist::has_param ( const std::string & name ) const`

Definition at line 203 of file CompositeDist.cpp.

Referenced by `params_components()`.

Here is the caller graph for this function:




#### 7.7.5.21 `MatT prior_hessian::CompositeDist::hess ( const VecT & u ) const [inline]`

Definition at line 205 of file CompositeDist.h.


References `num_dim()`.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::grad_hess_accumulate_idx()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::hess_accumulate_idx()`, and `rllh_components()`.

Here is the call graph for this function:



Here is the caller graph for this function:

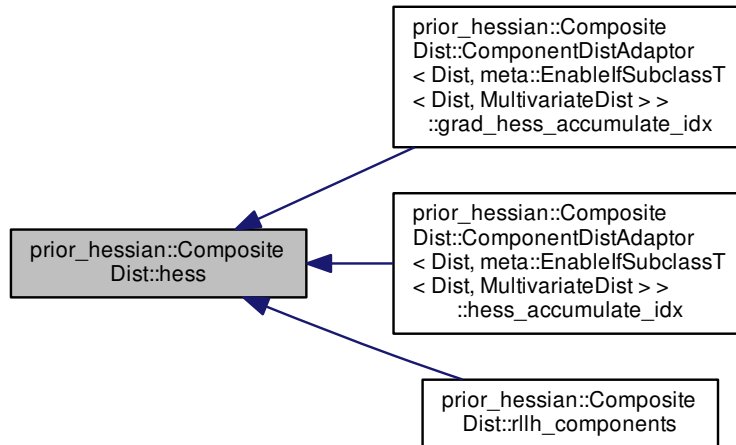

7.7.5.22 `void prior_hessian::CompositeDist::hess_accumulate ( const VecT & theta, MatT & hess ) const [inline]`

Definition at line 220 of file CompositeDist.h.

Referenced by `rllh_components()`.

Here is the caller graph for this function:




7.7.5.23 `bool prior_hessian::CompositeDist::in_bounds ( const VecT & u ) const [inline]`

Definition at line 147 of file CompositeDist.h.

References `lbound()`, and `ubound()`.

Here is the call graph for this function:

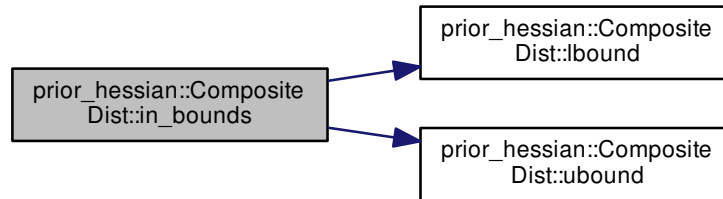


7.7.5.24 `bool prior_hessian::CompositeDist::in_bounds_all ( const MatT & u ) const [inline]`

Definition at line 149 of file `CompositeDist.h`.

References `lbound()`, and `ubound()`.

Here is the call graph for this function:

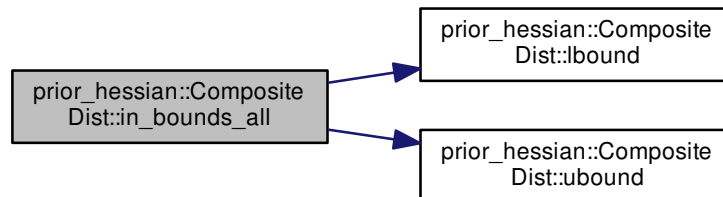


7.7.5.25 `void prior_hessian::CompositeDist::initialize ( ) [inline]`

Definition at line 89 of file `CompositeDist.h`.

References `clear()`.



Here is the call graph for this function:



**7.7.5.26** `void prior_hessian::CompositeDist::initialize ( const std::tuple<> & ) [inline]`

Initialize to the empty state.

Definition at line 90 of file `CompositeDist.h`.

References `clear()`.

Here is the call graph for this function:



**7.7.5.27** `void prior_hessian::CompositeDist::initialize ( std::tuple<> && ) [inline]`

Initialize of an empty lvalue tuple produces the empty state.

Definition at line 91 of file `CompositeDist.h`.

References `clear()`.

Here is the call graph for this function:



7.7.5.28 `template<class... Ts, typename = meta::EnableIfAllAreNotTupleT<Ts...>> void prior_hessian::CompositeDist::initialize ( Ts &&... dist ) [inline]`

Initialize of an empty rvalue tuple produces the empty state.

Definition at line 93 of file CompositeDist.h.

References `make_component_dist()`.

Here is the call graph for this function:



7.7.5.29 `template<class... Ts, typename = meta::EnableIfAllAreNotTupleT<Ts...>> void prior_hessian::CompositeDist::initialize ( std::tuple< Ts... > && dist_tuple ) [inline]`

Definition at line 100 of file CompositeDist.h.

References `make_component_dist_tuple()`.

Here is the call graph for this function:




7.7.5.30 `template<class... Ts, typename = meta::EnableIfNonEmpty<Ts...>> void prior_hessian::CompositeDist::initialize ( const std::tuple< Ts... > & dist_tuple ) [inline]`

Definition at line 107 of file CompositeDist.h.

References `clear()`, `CompositeDist()`, `get_dist_tuple()`, `make_component_dist_tuple()`, and `operator=()`.

Here is the call graph for this function:

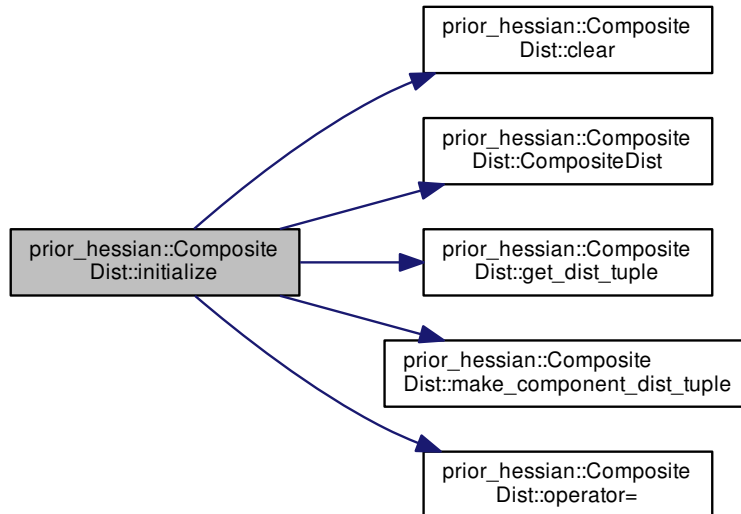


#### 7.7.5.31 `bool prior_hessian::CompositeDist::is_empty ( ) const [inline]`

Definition at line 124 of file `CompositeDist.h`.

Referenced by `operator==( )`.

Here is the caller graph for this function:




#### 7.7.5.32 `VecT prior_hessian::CompositeDist::lbound ( ) const [inline]`

Definition at line 143 of file `CompositeDist.h`.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_global_lbound( )`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_lbound( )`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_lbound( )`, `in_bounds( )`, `in_bounds_all( )`, `prior_hessian::operator<<( )`, and `rllh_components( )`.

Here is the caller graph for this function:

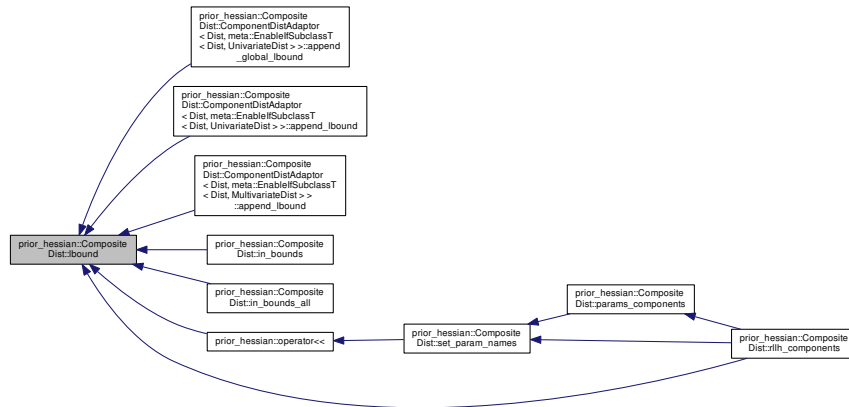


**7.7.5.33** `double prior_hessian::CompositeDist::llh ( const VecT & u ) const [inline]`

Definition at line 188 of file CompositeDist.h.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor<Dist, meta::EnableIfSubclassT<Dist, UnivariateDist>>::llh_from_iter()`, `prior_hessian::CompositeDist::ComponentDistAdaptor<Dist, meta::EnableIfSubclassT<Dist, MultivariateDist>>::llh_from_iter()`, and `rllh_components()`.

Here is the caller graph for this function:

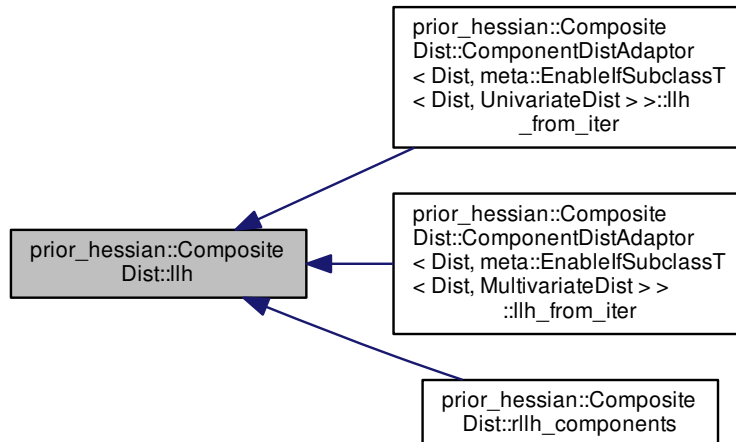


7.7.5.34 `VecT prior_hessian::CompositeDist::llh_components ( const VecT & u ) const` [inline]

Definition at line 249 of file CompositeDist.h.

Referenced by `rllh_components()`.

Here is the caller graph for this function:




7.7.5.35 `template<class DistT > static meta::ReturnIfInstantiatedFromT<DistT,DistT,ComponentDistAdaptor> prior_hessian::CompositeDist::make_component_dist ( DistT && dist )` [inline],[static]

Definition at line 851 of file CompositeDist.h.

Referenced by `CompositeDist()`, `initialize()`, and `make_component_dist_tuple()`.

Here is the caller graph for this function:

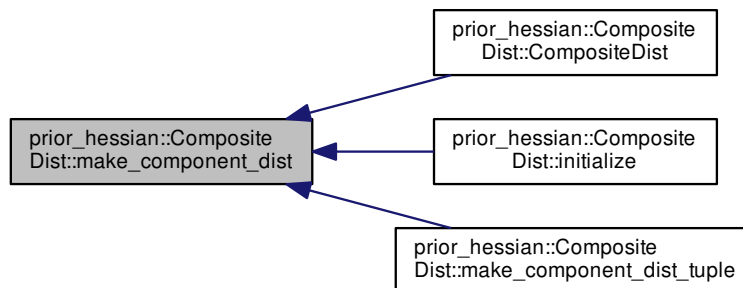

```
7.7.5.36 template<class DistT > static meta::ReturnIfNotInstantiatedFromT<Component↔
DistT<DistT>,DistT,ComponentDistAdaptor> prior_hessian::CompositeDist::make_component_dist ( DistT && dist
) [inline],[static]
```

Definition at line 857 of file CompositeDist.h.

References prior\_hessian::make\_adapted\_bounded\_dist().

Here is the call graph for this function:




```
7.7.5.37 template<class... Ts> static std::tuple<ComponentDistT<Ts>...> prior_hessian::↔
CompositeDist::make_component_dist_tuple ( const std::tuple< Ts... > & dists ) [inline],
[static]
```

Definition at line 867 of file CompositeDist.h.

Referenced by `CompositeDist()`, `initialize()`, and `make_component_dist_tuple()`.

Here is the caller graph for this function:

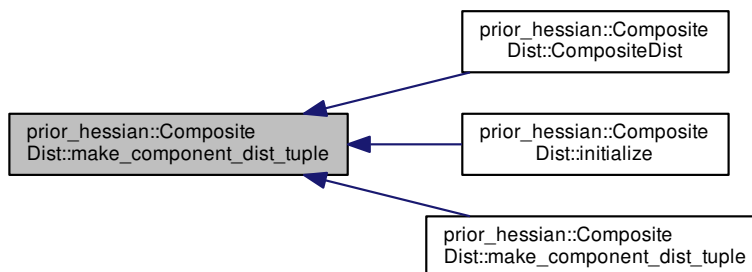


**7.7.5.38** `template<class... Ts, std::size_t... I> static std::tuple<ComponentDistT<Ts>...> prior_hessian::CompositeDist::make_component_dist_tuple ( const std::tuple< Ts... > & dists, std::index_sequence< I... > ) [inline], [static]`

Definition at line 874 of file CompositeDist.h.

References `prior_hessian::make_adapted_bounded_dist()`, and `make_component_dist()`.

Here is the call graph for this function:

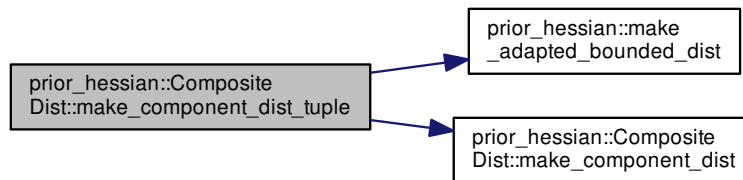

**7.7.5.39** `template<class... Ts> static std::tuple<ComponentDistT<Ts>...> prior_hessian::CompositeDist::make_component_dist_tuple ( std::tuple< Ts... > && dists ) [inline], [static]`

Definition at line 880 of file CompositeDist.h.

References `make_component_dist_tuple()`.

Here is the call graph for this function:




**7.7.5.40** `template<class... Ts, std::size_t... I> static std::tuple<ComponentDistT<Ts>...> prior_hessian::CompositeDist::make_component_dist_tuple ( std::tuple< Ts... > && dists, std::index_sequence< I... > ) [inline], [static]`

Definition at line 887 of file CompositeDist.h.

References `prior_hessian::make_adapted_bounded_dist()`, and `make_component_dist()`.

Here is the call graph for this function:

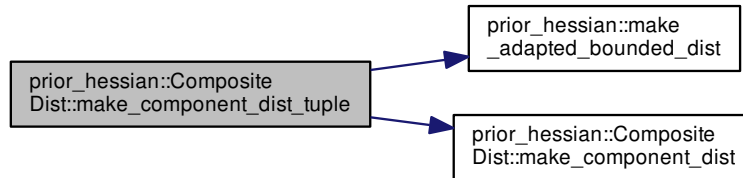


#### 7.7.5.41 VecT prior\_hessian::CompositeDist::make\_zero\_grad ( ) const [inline]

Definition at line 226 of file CompositeDist.h.

References `num_dim()`.

Here is the call graph for this function:



#### 7.7.5.42 MatT prior\_hessian::CompositeDist::make\_zero\_hess ( ) const [inline]

Definition at line 227 of file CompositeDist.h.

References `num_dim()`.

Here is the call graph for this function:








## 7.7.5.45 UVecT prior\_hessian::CompositeDist::num\_dim\_components ( ) const [inline]

Definition at line 137 of file CompositeDist.h.


References dim\_variables(), and set\_dim\_variables().

Referenced by prior\_hessian::operator<<(), and rllh\_components().

Here is the call graph for this function:



Here is the caller graph for this function:




## 7.7.5.46 IdxT prior\_hessian::CompositeDist::num\_params ( ) const [inline]

Definition at line 159 of file CompositeDist.h.

Referenced by prior\_hessian::operator<<(), rllh\_components(), and set\_param\_names().

Here is the caller graph for this function:




### 7.7.5.47 UVecT prior\_hessian::CompositeDist::num\_params\_components ( ) const [inline]

Definition at line 160 of file CompositeDist.h.

Referenced by prior\_hessian::operator<<(), param\_names(), and rllh\_components().

Here is the caller graph for this function:

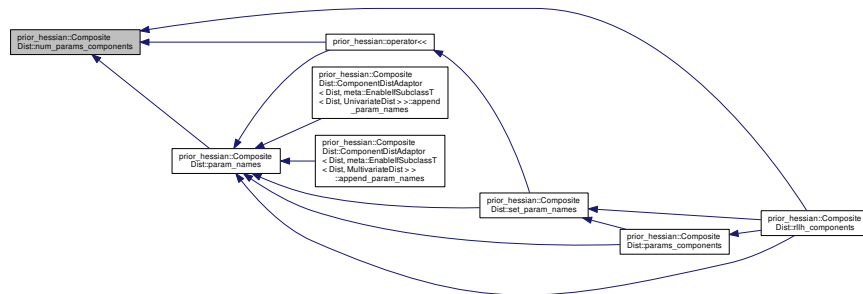

### 7.7.5.48 prior\_hessian::CompositeDist::operator bool ( ) const [inline]


Definition at line 125 of file CompositeDist.h.

### 7.7.5.49 bool prior\_hessian::CompositeDist::operator!=( const CompositeDist & o ) const [inline]

Definition at line 133 of file CompositeDist.h.

References operator==().

Here is the call graph for this function:



#### 7.7.5.50 CompositeDist & prior\_hessian::CompositeDist::operator=( const CompositeDist & o )

Definition at line 44 of file CompositeDist.cpp.

Referenced by initialize().

Here is the caller graph for this function:



#### 7.7.5.51 CompositeDist & prior\_hessian::CompositeDist::operator=( CompositeDist && o )

Definition at line 57 of file CompositeDist.cpp.

#### 7.7.5.52 bool prior\_hessian::CompositeDist::operator==( const CompositeDist & o ) const

Definition at line 70 of file CompositeDist.cpp.


References `is_empty()`.

Referenced by `component_types()`, and `operator!==( )`.

Here is the call graph for this function:



Here is the caller graph for this function:




### 7.7.5.53 `const StringVecT & prior_hessian::CompositeDist::param_names ( ) const`

Definition at line 120 of file CompositeDist.cpp.


References `component_names()`, `num_components()`, `num_dim()`, and `num_params_components()`.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_param_names()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_param_names()`, `prior_hessian::operator<<()`, `params_components()`, `rllh_components()`, and `set_param_names()`.

Here is the call graph for this function:

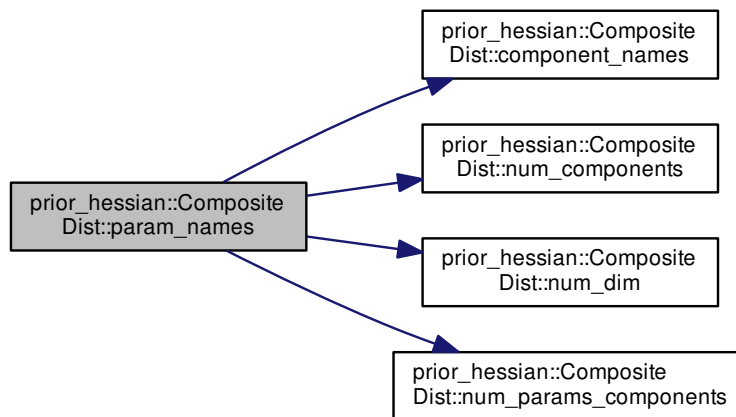

Here is the caller graph for this function:

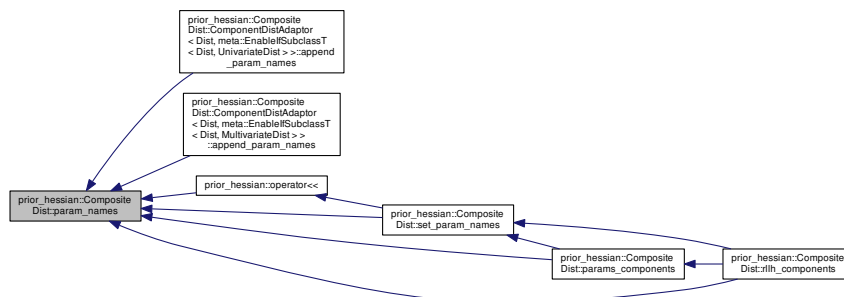


## 7.7.5.54 VecT prior\_hessian::CompositeDist::params ( ) const [inline]

Definition at line 161 of file CompositeDist.h.

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append\_params(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append\_params(), get\_param\_value(), prior\_hessian::operator<<(), rllh\_<-components(), and set\_param\_value().

Here is the caller graph for this function:

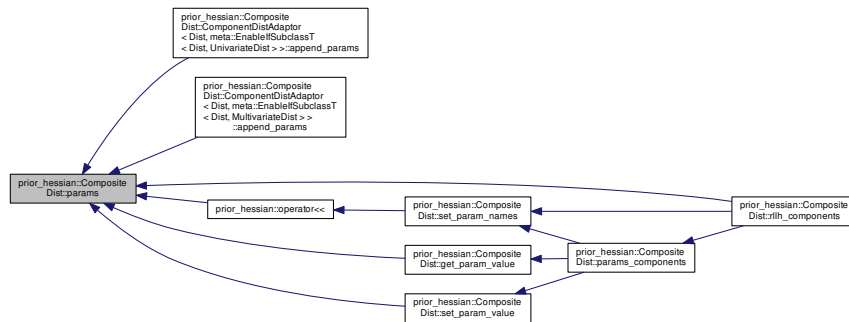


## 7.7.5.55 std::vector&lt;VecT&gt; prior\_hessian::CompositeDist::params\_components ( ) const [inline]

Definition at line 166 of file CompositeDist.h.

References get\_dim\_variable\_index(), get\_param\_index(), get\_param\_value(), has\_dim\_variable(), has\_param(), param\_names(), rename\_dim\_variable(), rename\_param(), set\_param\_names(), and set\_param\_value().

Referenced by rllh\_components().

Here is the call graph for this function:

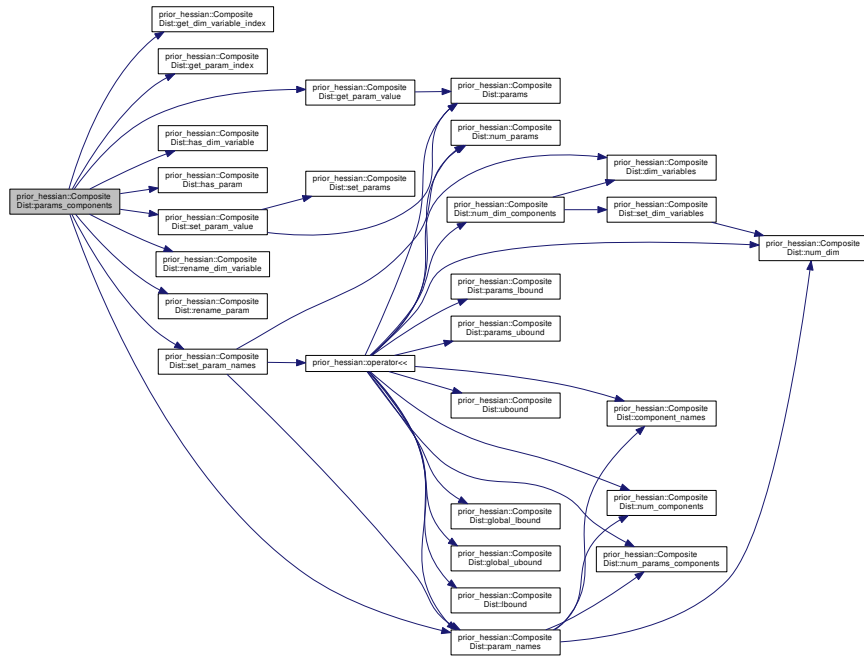

Here is the caller graph for this function:




7.7.5.56 VecT prior\_hessian::CompositeDist::params\_lbound ( ) const [inline]

Definition at line 164 of file CompositeDist.h.

Referenced by prior\_hessian::operator<<(), and rllh\_components().

Here is the caller graph for this function:




### 7.7.5.57 VecT prior\_hessian::CompositeDist::params\_ubound ( ) const [inline]

Definition at line 165 of file CompositeDist.h.

Referenced by prior\_hessian::operator<<(), and rllh\_components().

Here is the caller graph for this function:




### 7.7.5.58 double prior\_hessian::CompositeDist::pdf ( const VecT & u ) const [inline]

Definition at line 187 of file CompositeDist.h.

Referenced by prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::pdf\_from\_iter(), prior\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::pdf\_from\_iter(), and rllh\_components().

Here is the caller graph for this function:

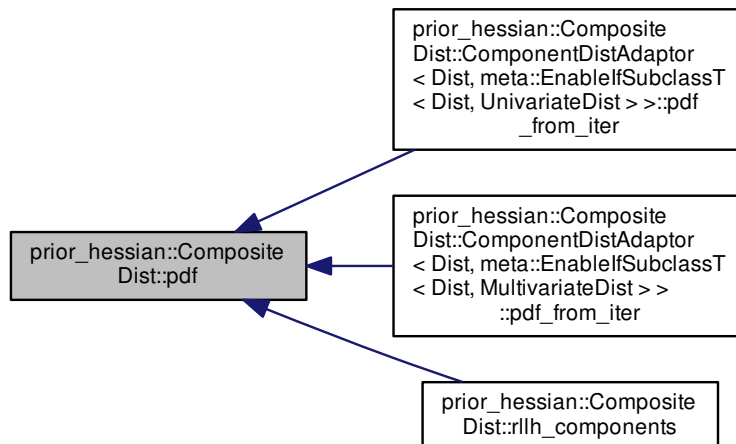




7.7.5.59 `void prior_hessian::CompositeDist::rename_dim_variable ( const std::string & old_name, std::string new_name )`

Definition at line 187 of file CompositeDist.cpp.

Referenced by `params_components()`.

Here is the caller graph for this function:




7.7.5.60 `void prior_hessian::CompositeDist::rename_param ( const std::string & old_name, std::string new_name )`

Definition at line 247 of file CompositeDist.cpp.

Referenced by `params_components()`.

Here is the caller graph for this function:




7.7.5.61 `double prior_hessian::CompositeDist::rllh ( const Vect & u ) const [inline]`

Definition at line 189 of file CompositeDist.h.

Referenced by `rllh_components()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::rllh_from_iter()`, and `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::rllh_from_iter()`.

Here is the caller graph for this function:

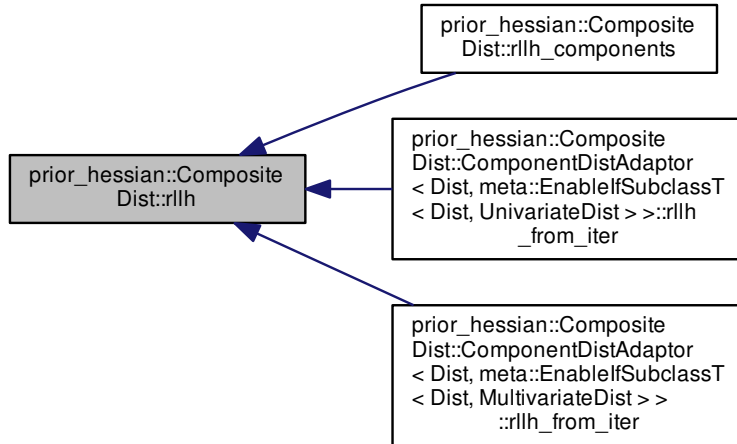


7.7.5.62 `VecT prior_hessian::CompositeDist::rllh_components ( const VecT & u ) const [inline]`

Definition at line 250 of file CompositeDist.h.

References `prior_hessian::meta::call_in_order()`, `cdf()`, `check_params()`, `component_types()`, `global_lbound()`, `global_ubound()`, `grad()`, `grad2()`, `grad2_accumulate()`, `grad_accumulate()`, `grad_grad2_accumulate()`, `grad_hess_accumulate()`, `hess()`, `hess_accumulate()`, `lbound()`, `llh()`, `llh_components()`, `prior_hessian::meta::logical_and_in_order()`, `num_dim()`, `num_dim_components()`, `num_params()`, `num_params_components()`, `param_names()`, `params()`, `params_components()`, `params_lbound()`, `params_ubound()`, `pdf()`, `rllh()`, `sample()`, `set_bounds()`, `set_lbound()`, `set_ubound()`, `set_param_names()`, `set_params()`, `set_ubound()`, and `ubound()`.

Here is the call graph for this function:

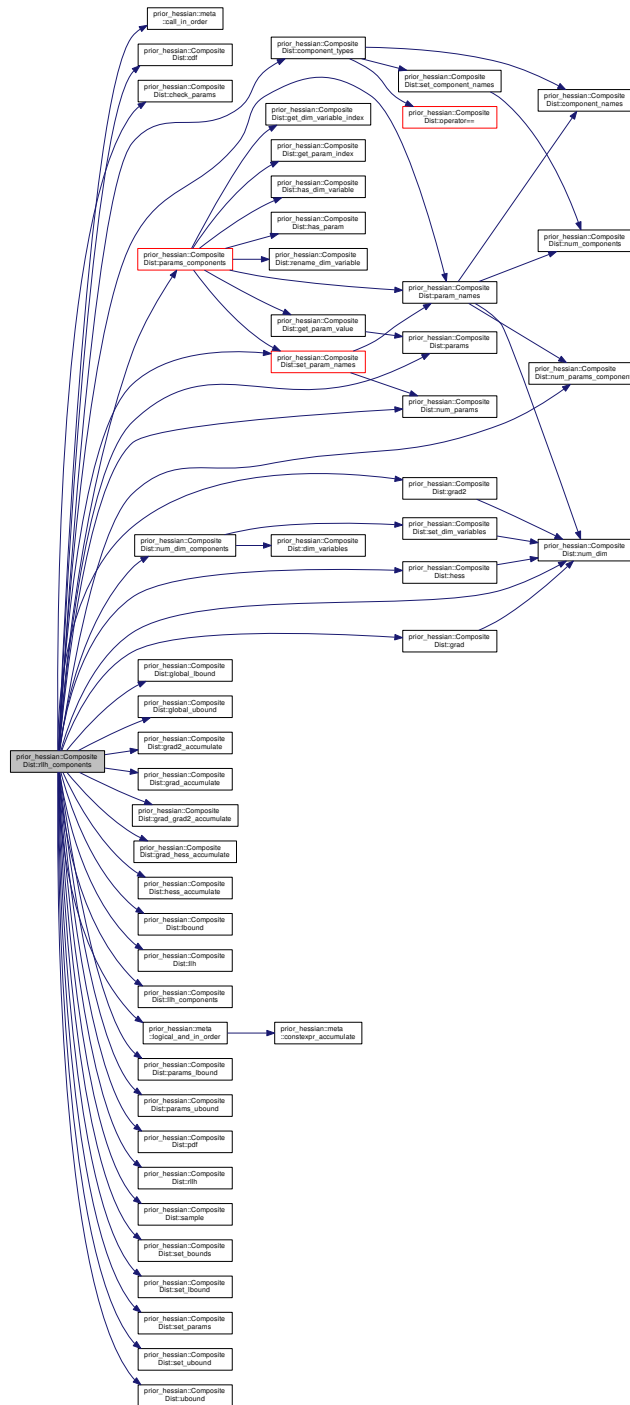


7.7.5.63 `VecT prior_hessian::CompositeDist::sample ( AnyRngT & rng ) const [inline]`

Definition at line 229 of file CompositeDist.h.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_sample()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_sample()`, and `rllh_components()`.

Here is the caller graph for this function:

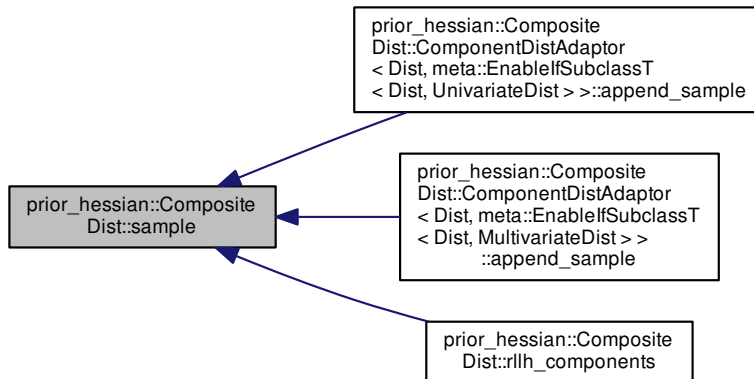

**7.7.5.64** `VecT prior_hessian::CompositeDist::sample ( AnyRngT && rng ) const [inline]`

Definition at line 230 of file `CompositeDist.h`.

**7.7.5.65** `MatT prior_hessian::CompositeDist::sample ( AnyRngT & rng, IdxT num_samples ) const [inline]`

Definition at line 231 of file `CompositeDist.h`.

**7.7.5.66** `MatT prior_hessian::CompositeDist::sample ( AnyRngT && rng, IdxT num_samples ) const [inline]`

Definition at line 232 of file `CompositeDist.h`.

**7.7.5.67** `template<class RngT > VecT prior_hessian::CompositeDist::sample ( RngT && rng ) const [inline]`

Definition at line 235 of file `CompositeDist.h`.

**7.7.5.68** `template<class RngT > MatT prior_hessian::CompositeDist::sample ( RngT && rng, IdxT num_samples ) const [inline]`


Definition at line 242 of file `CompositeDist.h`.

7.7.5.69 `void prior_hessian::CompositeDist::set_bounds ( const VecT & new_lbound, const VecT & new_ubound )`  
`[inline]`

Definition at line 156 of file CompositeDist.h.

Referenced by `rllh_components()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::set_bounds_from_iter()`, and `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::set_bounds_from_iter()`.

Here is the caller graph for this function:

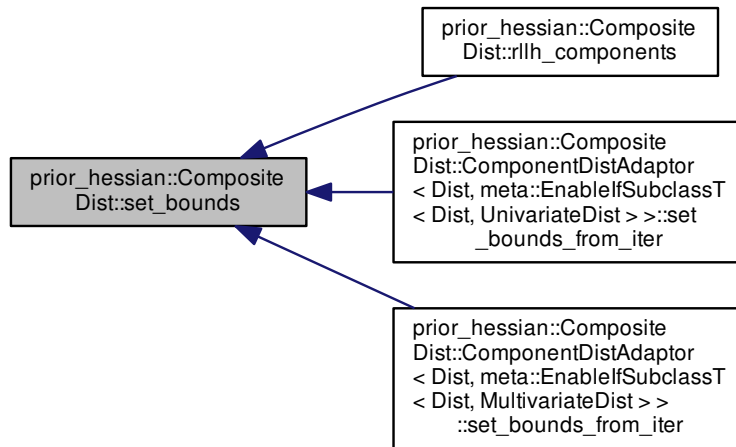

7.7.5.70 `template<class StringVec > void prior_hessian::CompositeDist::set_component_names ( StringVec && names )`

Definition at line 943 of file CompositeDist.h.


References `num_components()`.

Referenced by `component_types()`.

Here is the call graph for this function:



Here is the caller graph for this function:



#### 7.7.5.71 `template<class StringVec > void prior_hessian::CompositeDist::set_dim_variables ( StringVec && vars )`

Definition at line 955 of file CompositeDist.h.


References `num_dim()`.

Referenced by `num_dim_components()`.

Here is the call graph for this function:



Here is the caller graph for this function:




#### 7.7.5.72 `void prior_hessian::CompositeDist::set_lbound ( const VecT & new_bound ) [inline]`

Definition at line 154 of file CompositeDist.h.

Referenced by `rllh_components()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::set_lbound_from_iter()`, and `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::set_lbound_from_iter()`.

Here is the caller graph for this function:

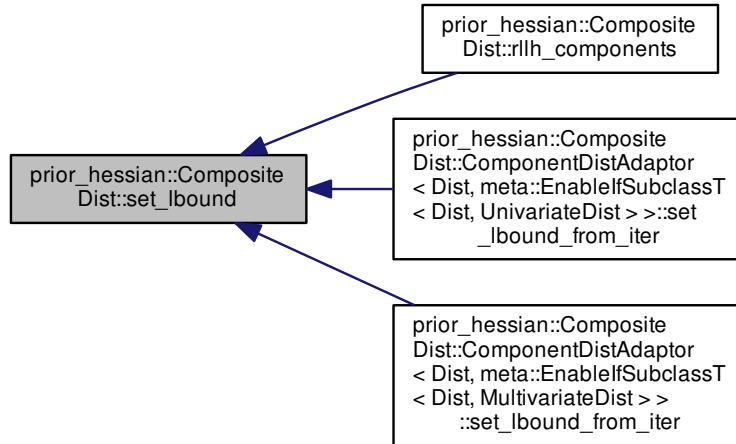


7.7.5.73 `template<class StringVec > void prior_hessian::CompositeDist::set_param_names ( StringVec && vars )`

Definition at line 967 of file `CompositeDist.h`.


References `num_params()`, `prior_hessian::operator<<()`, and `param_names()`.

Referenced by `params_components()`, and `rllh_components()`.

Here is the call graph for this function:

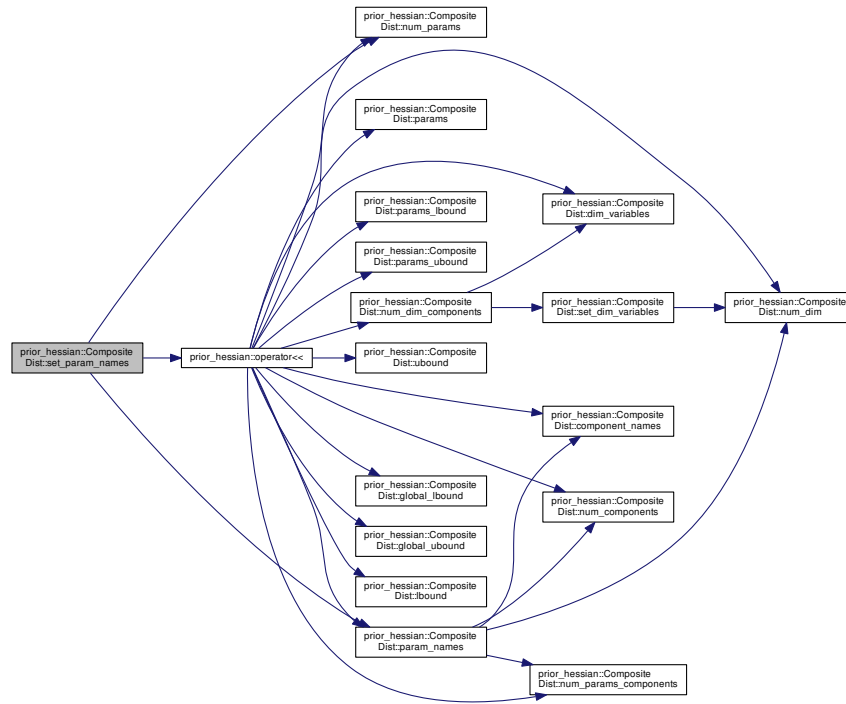

Here is the caller graph for this function:



#### 7.7.5.74 void prior\_hessian::CompositeDist::set\_param\_value ( const std::string & name, double value )


Definition at line 233 of file `CompositeDist.cpp`.

References `params()`, and `set_params()`.


Referenced by `params_components()`.



Here is the call graph for this function:

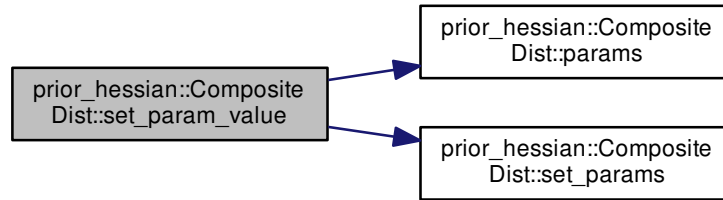

Here is the caller graph for this function:



**7.7.5.75** `void prior_hessian::CompositeDist::set_params ( const VecT & new_params ) [inline]`

Definition at line 162 of file `CompositeDist.h`.

Referenced by `rllh_components()`, and `set_param_value()`.

Here is the caller graph for this function:




**7.7.5.76** `void prior_hessian::CompositeDist::set_ubound ( const VecT & new_bound ) [inline]`

Definition at line 155 of file `CompositeDist.h`.

Referenced by `rllh_components()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::set_ubound_from_iter()`, and `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::set_ubound_from_iter()`.

Here is the caller graph for this function:

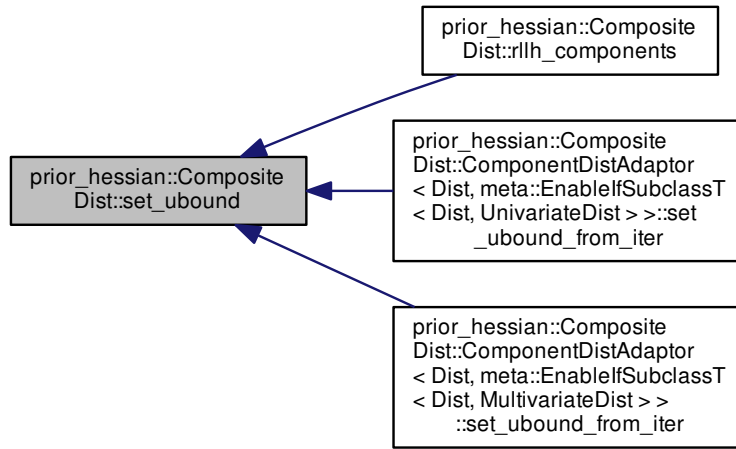


#### 7.7.5.77 VecT prior\_hessian::CompositeDist::ubound ( ) const [inline]

Definition at line 144 of file `CompositeDist.h`.

Referenced by `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_global_ubound()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >::append_ubound()`, `prior_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >::append_ubound()`, `in_bounds()`, `in_bounds_all()`, `prior_hessian::operator<<()`, and `rllh_components()`.

Here is the caller graph for this function:

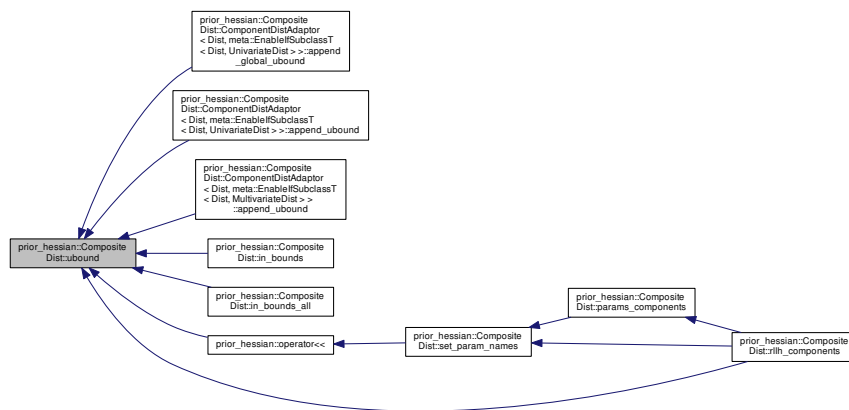


The documentation for this class was generated from the following files:

- [CompositeDist.h](#)
- [CompositeDist.cpp](#)


## 7.8 prior\_hessian::meta::conjunction<... > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::conjunction<... >:



Collaboration diagram for prior\_hessian::meta::conjunction<... >:



### 7.8.1 Detailed Description

```
template<class...>
struct prior_hessian::meta::conjunction<... >
```

Definition at line 66 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)


## 7.9 prior\_hessian::meta::conjunction< B1 > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::conjunction< B1 >:



Collaboration diagram for prior\_hessian::meta::conjunction< B1 >:



### 7.9.1 Detailed Description

```
template<class B1>  
struct prior_hessian::meta::conjunction< B1 >
```

Definition at line 67 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)


## 7.10 prior\_hessian::meta::conjunction< B1, Bn... > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::conjunction< B1, Bn... >:

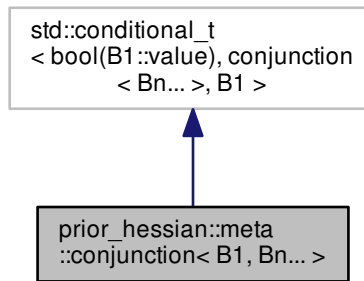

Collaboration diagram for prior\_hessian::meta::conjunction< B1, Bn... >:

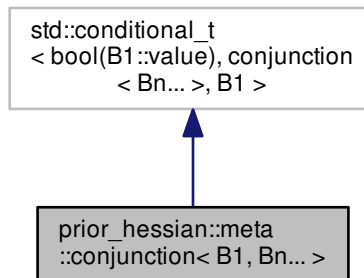

### 7.10.1 Detailed Description

```
template<class B1, class... Bn>
struct prior_hessian::meta::conjunction< B1, Bn... >
```

Definition at line 69 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)


7.11 prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/CopulaDist.h>
```

Inheritance diagram for prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >:

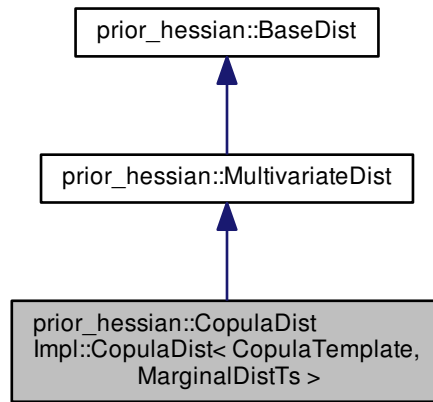

Collaboration diagram for prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >:

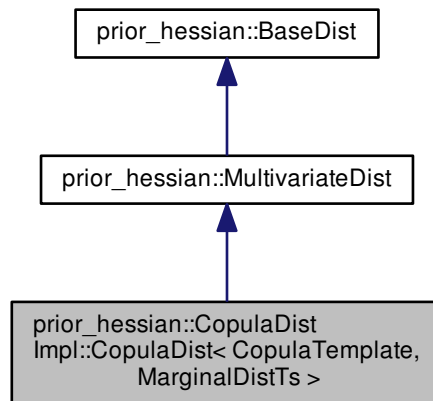

## Public Types

- using `NdimVecT` = `arma::Col< double >::fixed< _num_dim >`
- using `NdimMatT` = `arma::Mat< double >::fixed< _num_dim, _num_dim >`
- using `NparamsVecT` = `arma::Col< double >`
- using `MarginalDistTupleT` = `std::tuple< MarginalDistTs... >`
- using `CopulaT` = `CopulaTemplate< _num_dim >`
- `template<size_t I>`  
using `MarginalDistT` = `std::tuple_element< I, MarginalDistTupleT >`

## Public Member Functions

- `CopulaDist` ()
- `template<class Copula , class... DistTs, std::enable_if_t< sizeof...(DistTs)==sizeof...(MarginalDistTs), bool > Enable = true>`  
`CopulaDist` (`Copula &&copula, DistTs &&...dists`)
- void `initialize_copula` (`const CopulaT &_copula`)
- void `initialize_marginals` (`const MarginalDistTupleT &dists`)
- `NdimVecT lbound` () const
- `NdimVecT ubound` () const
- `template<class Vec , class Vec2 >`  
void `set_bounds` (`const Vec &lbound, const Vec2 &ubound`)
- `template<class Vec >`  
void `set_lbound` (`const Vec &lbound`)
- `template<class Vec >`  
void `set_ubound` (`const Vec &ubound`)
- bool `operator==` (`const CopulaDist< CopulaTemplate, MarginalDistTs... > &o`) const
- bool `operator!=` (`const CopulaDist< CopulaTemplate, MarginalDistTs... > &o`) const
- `NparamsVecT params` () const
- double `get_copula_theta` () const
- void `set_copula_theta` (`double theta`)
- `template<class Vec >`  
void `set_params` (`const Vec &params`)
- `template<class Vec >`  
double `cdf` (`const Vec &x`) const
- `template<class Vec >`  
double `pdf` (`const Vec &x`) const
- `template<class Vec >`  
double `llh` (`const Vec &x`) const
- `template<class Vec >`  
double `rllh` (`const Vec &x`) const
- `template<class Vec >`  
`NdimVecT grad` (`const Vec &x`) const
- `template<class Vec >`  
`NdimVecT grad2` (`const Vec &x`) const
- `template<class Vec >`  
`NdimMatT hess` (`const Vec &x`) const
- `template<class Vec , class Vec2 >`  
void `grad_grad2_accumulate` (`const Vec &x, Vec2 &g, Vec2 &g2`) const
- `template<class Vec , class Vec2 , class Mat >`  
void `grad_hess_accumulate` (`const Vec &x, Vec2 &g, Mat &hess`) const
- `template<class RngT >`  
`NdimVecT sample` (`RngT &rng`) const
- `template<class IterT >`  
void `set_params_iter` (`IterT &params`)

## Static Public Member Functions

- static `IdxT num_params ()`
- static constexpr `IdxT num_components ()`
- static constexpr `IdxT num_dim ()`
- template<class Vec >  
static bool `check_params (const Vec &params)`
- static bool `check_copula_theta (double theta)`
- static const `StringVecT & param_names ()`
- static const `NparamsVecT & param_lbound ()`
- static const `NparamsVecT & param_ubound ()`
- static const `NdimVecT & global_lbound ()`
- static const `NdimVecT & global_ubound ()`
- template<class IterT >  
static bool `check_params_iter (IterT &params)`

## Static Protected Member Functions

- template<class Vec >  
static void `check_bounds (const Vec &lbound, const Vec &ubound)`

## 7.11.1 Detailed Description

```
template<template< int > class CopulaTemplate, class... MarginalDistTs>
class prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >
```

Definition at line 22 of file CopulaDist.h.

## 7.11.2 Member Typedef Documentation

7.11.2.1 `template<template< int > class CopulaTemplate, class... MarginalDistTs> using prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::CopulaT = CopulaTemplate<_num_dim>`

Definition at line 41 of file CopulaDist.h.

7.11.2.2 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<size_t I> using prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::MarginalDistT = std::tuple_element<I,MarginalDistTupleT>`

Definition at line 44 of file CopulaDist.h.

7.11.2.3 `template<template< int > class CopulaTemplate, class... MarginalDistTs> using prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::MarginalDistTupleT = std::tuple<MarginalDistTs...>`

Definition at line 40 of file CopulaDist.h.



7.11.2.4 `template<template< int > class CopulaTemplate, class... MarginalDistTs> using prior_↔  
hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::NdimMatT =  
arma::Mat<double>::fixed<_num_dim,_num_dim>`

Definition at line 32 of file CopulaDist.h.

7.11.2.5 `template<template< int > class CopulaTemplate, class... MarginalDistTs> using prior_↔  
hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::NdimVecT =  
arma::Col<double>::fixed<_num_dim>`

Definition at line 31 of file CopulaDist.h.

7.11.2.6 `template<template< int > class CopulaTemplate, class... MarginalDistTs> using prior_↔  
hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::NparamsVecT =  
arma::Col<double>`

Definition at line 37 of file CopulaDist.h.

### 7.11.3 Constructor & Destructor Documentation

7.11.3.1 `template<template< int > class CopulaTemplate, class... MarginalDistTs> prior_hessian::CopulaDistImpl::↔  
CopulaDist< CopulaTemplate, MarginalDistTs >::CopulaDist ( )`

Definition at line 242 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.

Here is the caller graph for this function:



7.11.3.2 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Copula  
, class... DistTs, std::enable_if_t< sizeof...(DistTs)==sizeof...(MarginalDistTs), bool > Enable>  
prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::CopulaDist ( Copula &&  
copula, DistTs &&... dists )`

Definition at line 233 of file CopulaDist.h.


7.11.4 Member Function Documentation

7.11.4.1 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > double prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::cdf ( const Vec & x ) const`

Definition at line 385 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=( )`.

Here is the caller graph for this function:

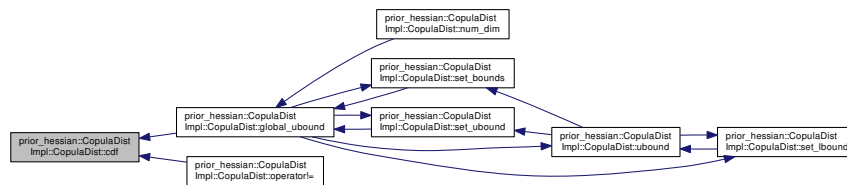


7.11.4.2 `template<class Vec > static void prior_hessian::MultivariateDist::check_bounds ( const Vec & lbound, const Vec & ubound ) [inline], [static], [protected], [inherited]`

Definition at line 57 of file MultivariateDist.h.

7.11.4.3 `template<template< int > class CopulaTemplate, class... MarginalDistTs> static bool prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::check_copula_theta ( double theta ) [static]`

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.


Here is the caller graph for this function:



7.11.4.4 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > static bool prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::check_params ( const Vec & params ) [static]`

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.

Here is the caller graph for this function:




7.11.4.5 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class IterT > bool prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::check_params_iter ( IterT & params ) [static]`

Definition at line 368 of file `CopulaDist.h`.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:



7.11.4.6 `template<template< int > class CopulaTemplate, class... MarginalDistTs> double prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::get_copula_theta ( ) const`


Definition at line 346 of file `CopulaDist.h`.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.




Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_bounds()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_ubound()`.

Here is the call graph for this function:

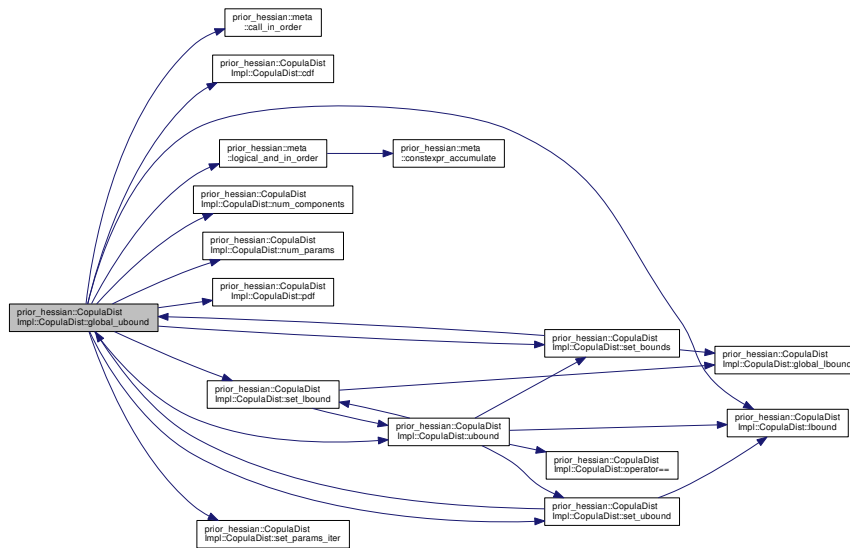

Here is the caller graph for this function:

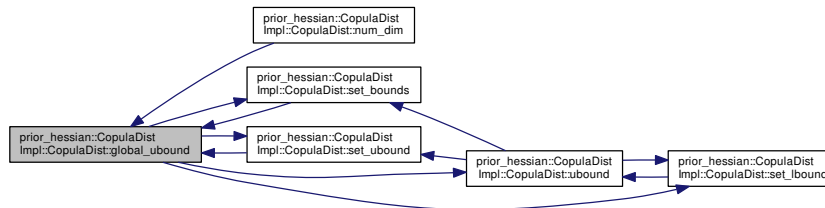

**7.11.4.9** `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > CopulaDist< CopulaTemplate, MarginalDistTs... >::NdimVecT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::grad ( const Vec & x ) const`

Definition at line 428 of file `CopulaDist.h`.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:



7.11.4.10 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > CopulaDist< CopulaTemplate, MarginalDistTs... >::NdimVecT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::grad2 ( const Vec & x ) const`

Definition at line 440 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=()`.

Here is the caller graph for this function:




7.11.4.11 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec , class Vec2 > void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::grad_grad2_accumulate ( const Vec & x, Vec2 & g, Vec2 & g2 ) const`

Definition at line 466 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=()`.

Here is the caller graph for this function:




7.11.4.12 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec , class Vec2 , class Mat > void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::grad_hess_accumulate ( const Vec & x, Vec2 & g, Mat & hess ) const`

Definition at line 481 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:



7.11.4.13 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > CopulaDist< CopulaTemplate, MarginalDistTs... >::NdimMatT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::hess ( const Vec & x ) const`

Definition at line 452 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:




7.11.4.14 `template<template< int > class CopulaTemplate, class... MarginalDistTs> void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::initialize_copula ( const CopulaT & _copula )`

Definition at line 255 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim( )`.

Here is the caller graph for this function:




7.11.4.15 `template<template< int > class CopulaTemplate, class... MarginalDistTs> void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::initialize_marginals ( const MarginalDistTupleT & dists )`

Definition at line 262 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.

Here is the caller graph for this function:




7.11.4.16 `template<template< int > class CopulaTemplate, class... MarginalDistTs> NdimVecT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::lbound ( ) const [inline]`

Definition at line 67 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::ubound()`.

Here is the caller graph for this function:

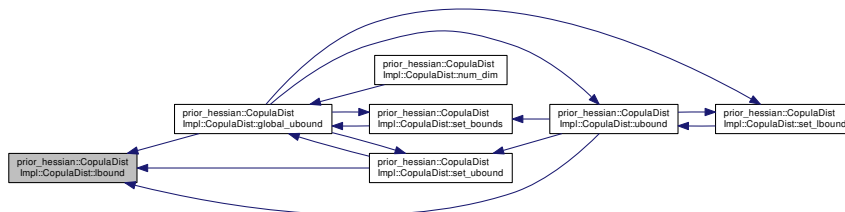



7.11.4.17 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > double prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::llh ( const Vec & x ) const`

Definition at line 405 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:




7.11.4.18 `template<template< int > class CopulaTemplate, class... MarginalDistTs> static constexpr IdxT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_components ( ) [inline], [static]`

Definition at line 46 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound( )`.

Here is the caller graph for this function:

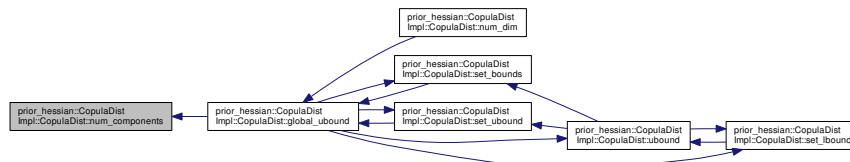


7.11.4.19 `template<template< int > class CopulaTemplate, class... MarginalDistTs> static constexpr IdxT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim ( ) [inline], [static]`

Definition at line 47 of file CopulaDist.h.

References `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::check_copula_theta( )`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::check_params( )`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::CopulaDist( )`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_lbound( )`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound( )`, `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate,`

MarginalDistTs >::initialize\_copula(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::initialize\_marginals(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::param\_<-lbound(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::param\_names(), prior\_<-hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::param\_ubound(), and prior\_hessian::<-CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::params().

Here is the call graph for this function:

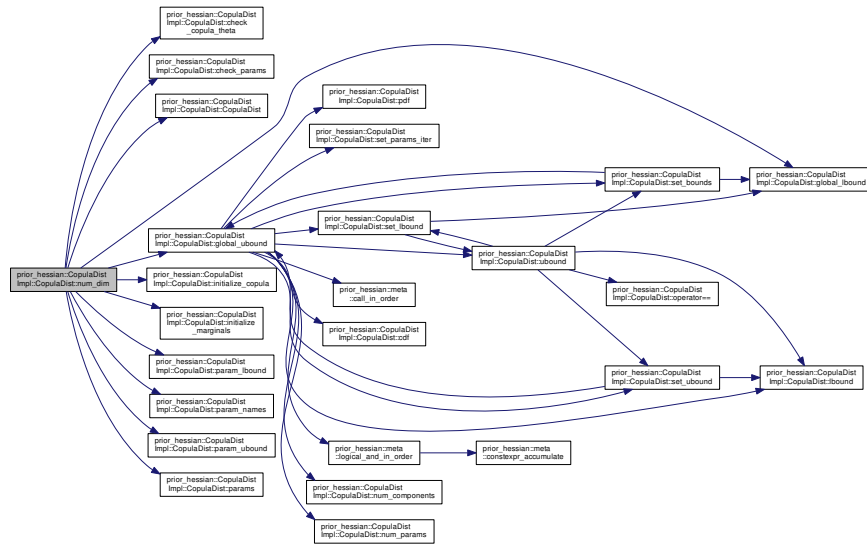


7.11.4.20 `template<template< int > class CopulaTemplate, class... MarginalDistTs> static IdxT prior_hessian::<-CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_params ( ) [inline], [static]`

Definition at line 38 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=()`.

Here is the caller graph for this function:

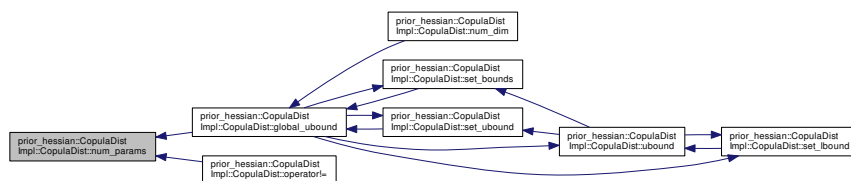


```
7.11.4.21 template<template< int > class CopulaTemplate, class... MarginalDistTs> bool prior_hessian::CopulaDist←
Impl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=( const CopulaDist< CopulaTemplate,
MarginalDistTs... > & o ) const [inline]
```

Definition at line 80 of file CopulaDist.h.

References prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::cdf(), prior\_hessian::←  
CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::check\_params\_iter(), prior\_hessian::CopulaDist←  
Impl::CopulaDist< CopulaTemplate, MarginalDistTs >::get\_copula\_theta(), prior\_hessian::CopulaDistImpl::Copula←  
Dist< CopulaTemplate, MarginalDistTs >::grad(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate,  
MarginalDistTs >::grad2(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::grad\_←  
grad2\_accumulate(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::grad\_hess\_←  
accumulate(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::hess(), prior\_hessian←  
::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::llh(), prior\_hessian::CopulaDistImpl::CopulaDist<  
CopulaTemplate, MarginalDistTs >::num\_params(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate,  
MarginalDistTs >::operator==( const CopulaDist< CopulaTemplate, MarginalDistTs > & o ) const, prior\_hessian←  
::params(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::pdf(), prior\_hessian←  
::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::rllh(), prior\_hessian::CopulaDistImpl::Copula←  
Dist< CopulaTemplate, MarginalDistTs >::sample(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate,  
MarginalDistTs >::set\_copula\_theta(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs  
>::set\_params(), prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set\_params\_iter(),  
and prior\_hessian::meta::sum\_in\_order().

Here is the call graph for this function:

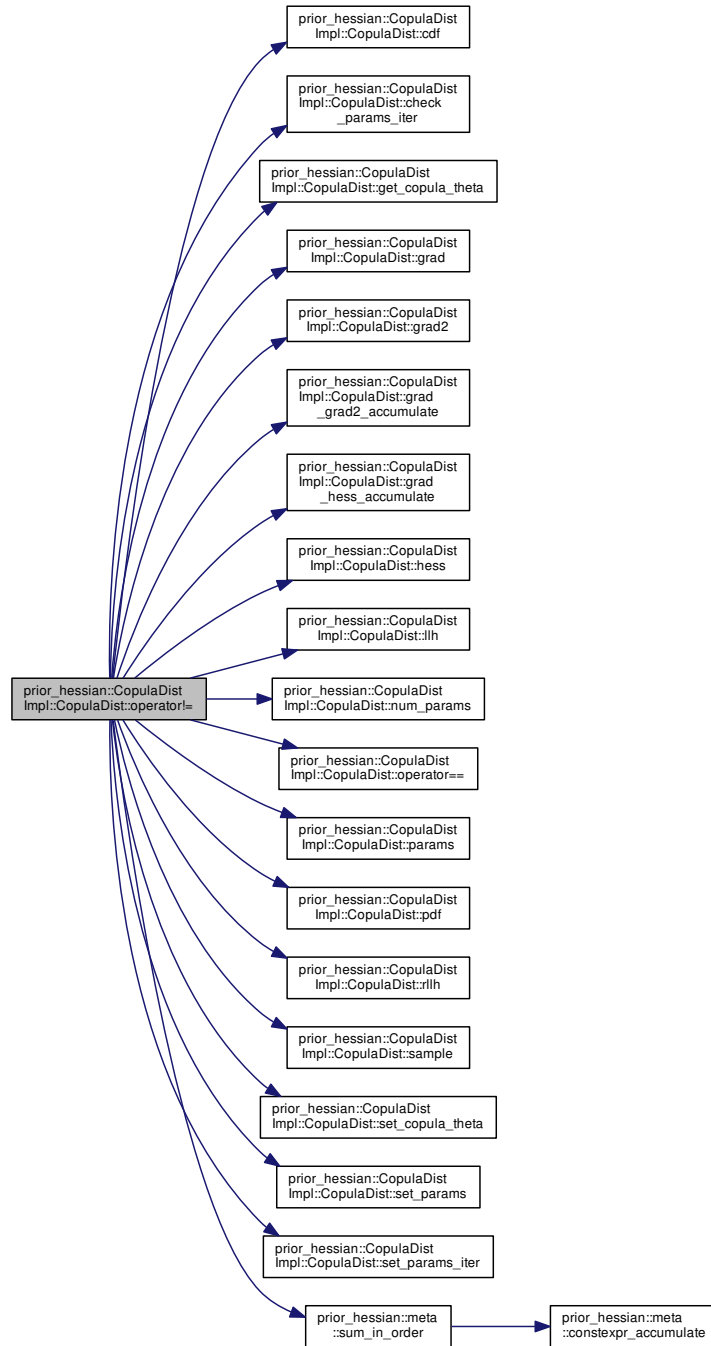


7.11.4.22 `template<template< int > class CopulaTemplate, class... MarginalDistTs> bool prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator==( const CopulaDist< CopulaTemplate, MarginalDistTs... > & o ) const`

Definition at line 330 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::ubound()`.

Here is the caller graph for this function:




7.11.4.23 `template<template< int > class CopulaTemplate, class... MarginalDistTs> const CopulaDist< CopulaTemplate, MarginalDistTs... >::NparamsVecT & prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::param_lbound ( ) [static]`

Definition at line 518 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.

Here is the caller graph for this function:




7.11.4.24 `template<template< int > class CopulaTemplate, class... MarginalDistTs> const StringVecT & prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::param_names ( ) [static]`

Definition at line 509 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.

Here is the caller graph for this function:




7.11.4.25 `template<template< int > class CopulaTemplate, class... MarginalDistTs> const CopulaDist< CopulaTemplate, MarginalDistTs... >::NparamsVect & prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::param_ubound ( ) [static]`

Definition at line 527 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`.

Here is the caller graph for this function:




7.11.4.26 `template<template< int > class CopulaTemplate, class... MarginalDistTs> CopulaDist< CopulaTemplate, MarginalDistTs... >::NparamsVect prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::params ( ) const`

Definition at line 337 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::num_dim()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=( )`.

Here is the caller graph for this function:

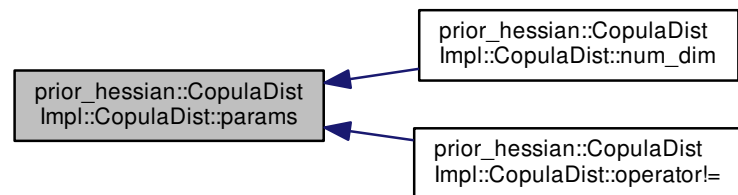


7.11.4.27 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > double prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::pdf ( const Vec & x ) const`

Definition at line 394 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:

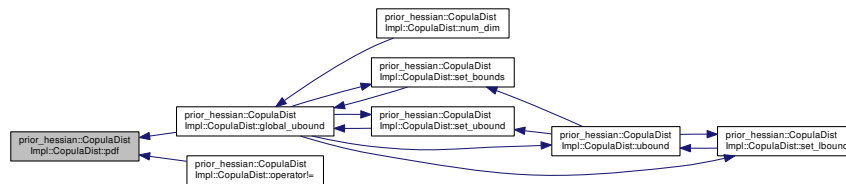

7.11.4.28 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > double prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::rllh ( const Vec & x ) const`

Definition at line 416 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:



7.11.4.29 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class RngT > CopulaDist< CopulaTemplate, MarginalDistTs... >::NdimecT prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::sample ( RngT & rng ) const`

Definition at line 499 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:




7.11.4.30 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec , class Vec2 > void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_bounds ( const Vec & lbound, const Vec2 & ubound )`

Definition at line 271 of file CopulaDist.h.


References `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::ubound()`.

Here is the call graph for this function:

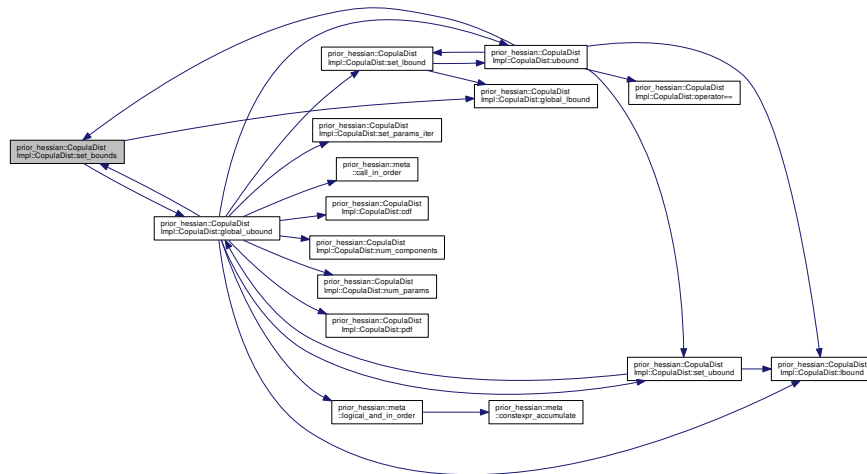

Here is the caller graph for this function:





7.11.4.31 `template<template< int > class CopulaTemplate, class... MarginalDistTs> void prior_hessian::← CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_copula_theta ( double theta )`

Definition at line 352 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!==( )`.

Here is the caller graph for this function:




7.11.4.32 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_lbound ( const Vec & lbound )`

Definition at line 295 of file CopulaDist.h.


References `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_lbound( )`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::ubound( )`.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound( )`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::ubound( )`.

Here is the call graph for this function:

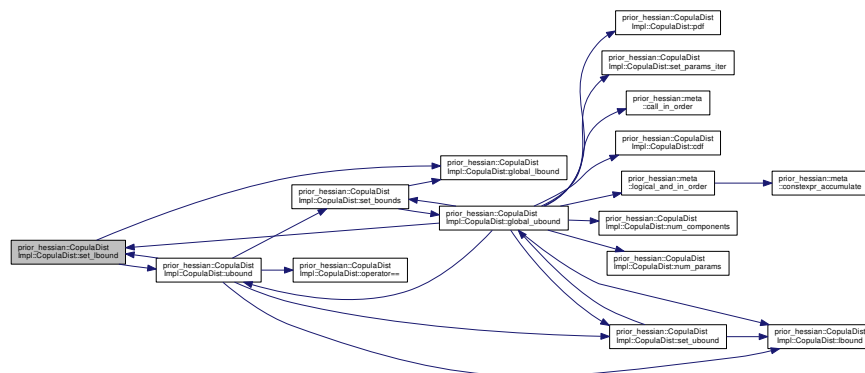

Here is the caller graph for this function:

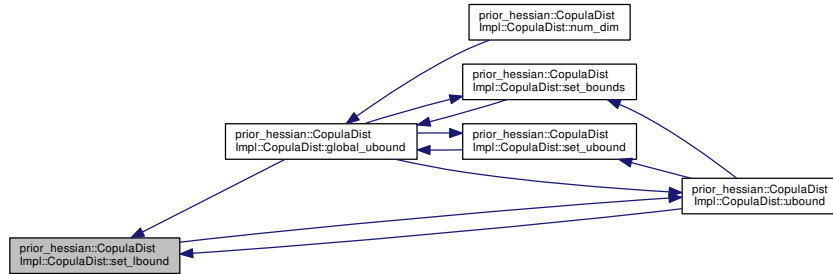

7.11.4.33 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class Vec > void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_params ( const Vec & params )`

Definition at line 359 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=(())`.

Here is the caller graph for this function:




7.11.4.34 `template<template< int > class CopulaTemplate, class... MarginalDistTs> template<class IterT > void prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set_params_iter ( IterT & params )`

Definition at line 375 of file CopulaDist.h.

Referenced by `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global_ubound()`, and `prior_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::operator!=(())`.

Here is the caller graph for this function:

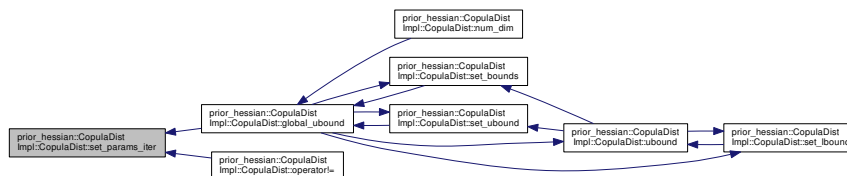





CopulaTemplate, MarginalDistTs >::set\_lbound(), and prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set\_ubound().

Referenced by prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::global\_ubound(), and prior\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >::set\_lbound().

Here is the call graph for this function:

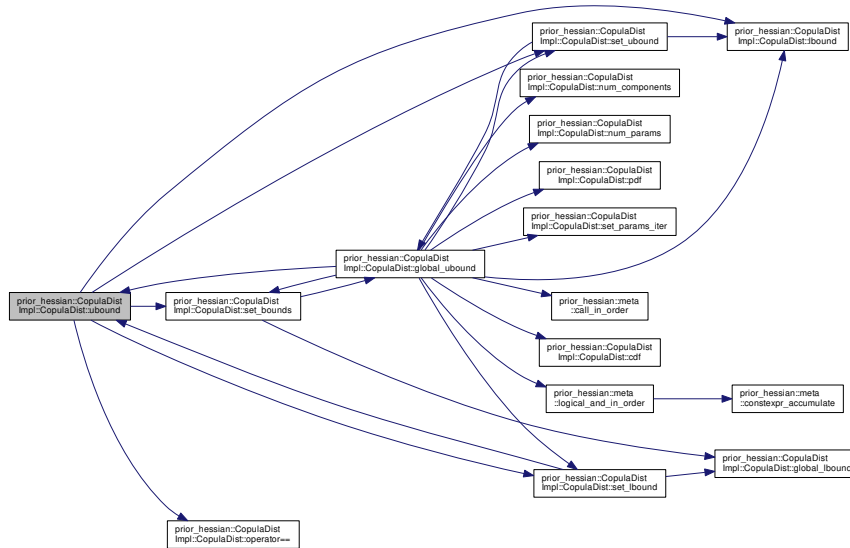

Here is the caller graph for this function:

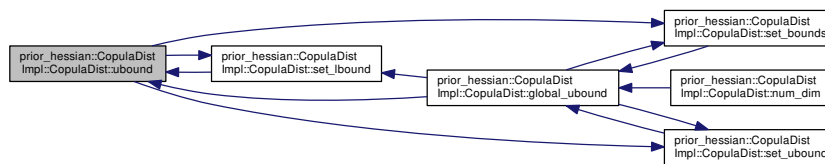


The documentation for this class was generated from the following file:

- [CopulaDist.h](#)


## 7.12 prior\_hessian::ArchimedeanCopula::D2\_GenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
ArchimedeanCopula.h>
```

Inheritance diagram for `prior_hessian::ArchimedeanCopula::D2_GenTerms`:

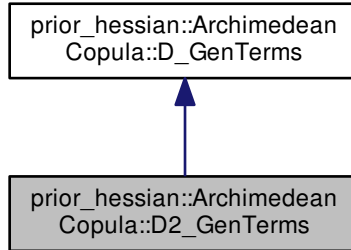

Collaboration diagram for `prior_hessian::ArchimedeanCopula::D2_GenTerms`:



#### Public Attributes

- double [xi\\_n\\_t](#)
- double [log\\_dn\\_gen\\_t](#)
- double [eta\\_n\\_np1\\_t](#)

#### 7.12.1 Detailed Description

Definition at line 17 of file `ArchimedeanCopula.h`.

### 7.12.2 Member Data Documentation

7.12.2.1 double prior\_hessian::ArchimedeanCopula::D\_GenTerms::eta\_n\_np1\_t [inherited]

Definition at line 15 of file ArchimedeanCopula.h.

7.12.2.2 double prior\_hessian::ArchimedeanCopula::D\_GenTerms::log\_dn\_gen\_t [inherited]

Definition at line 14 of file ArchimedeanCopula.h.

7.12.2.3 double prior\_hessian::ArchimedeanCopula::D2\_IGenTerms::xi\_n\_t

Definition at line 18 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)


## 7.13 prior\_hessian::ArchimedeanCopula::D2\_IGenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵  
ArchimedeanCopula.h>
```

Inheritance diagram for prior\_hessian::ArchimedeanCopula::D2\_IGenTerms:



Collaboration diagram for prior\_hessian::ArchimedeanCopula::D2\_IGenTerms:

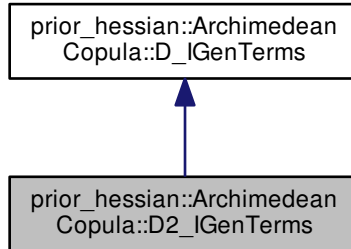

#### Public Attributes

- double [d2\\_igen\\_ui](#)
- double [ixi\\_1\\_ui](#)
- double [d1\\_igen\\_ui](#)
- double [ieta\\_21\\_ui](#)

#### 7.13.1 Detailed Description

Definition at line 25 of file ArchimedeanCopula.h.

#### 7.13.2 Member Data Documentation

7.13.2.1 double prior\_hessian::ArchimedeanCopula::D\_IGenTerms::d1\_igen\_ui [inherited]

Definition at line 22 of file ArchimedeanCopula.h.

7.13.2.2 double prior\_hessian::ArchimedeanCopula::D2\_IGenTerms::d2\_igen\_ui

Definition at line 26 of file ArchimedeanCopula.h.

7.13.2.3 double prior\_hessian::ArchimedeanCopula::D\_IGenTerms::ieta\_21\_ui [inherited]

Definition at line 23 of file ArchimedeanCopula.h.

## 7.13.2.4 double prior\_hessian::ArchimedeanCopula::D2\_IGenTerms::ixi\_1\_ui

Definition at line 27 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)


## 7.14 prior\_hessian::ArchimedeanCopula::D2Theta\_GenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵  
ArchimedeanCopula.h>
```

Inheritance diagram for prior\_hessian::ArchimedeanCopula::D2Theta\_GenTerms:

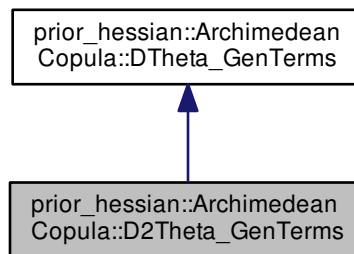

Collaboration diagram for prior\_hessian::ArchimedeanCopula::D2Theta\_GenTerms:

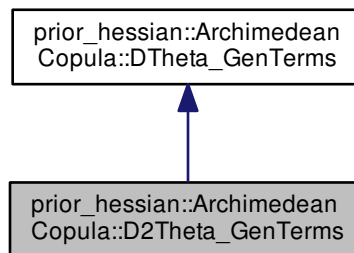



## Public Attributes

- double [xi\\_0n\\_t](#)
- double [log\\_dn\\_gen\\_t](#)
- double [eta\\_0n\\_1n\\_t](#)

### 7.14.1 Detailed Description

Definition at line 34 of file ArchimedeanCopula.h.

### 7.14.2 Member Data Documentation

#### 7.14.2.1 double prior\_hessian::ArchimedeanCopula::DTheta\_GenTerms::eta\_0n\_1n\_t [inherited]

Definition at line 32 of file ArchimedeanCopula.h.

#### 7.14.2.2 double prior\_hessian::ArchimedeanCopula::DTheta\_GenTerms::log\_dn\_gen\_t [inherited]

Definition at line 31 of file ArchimedeanCopula.h.

#### 7.14.2.3 double prior\_hessian::ArchimedeanCopula::D2Theta\_GenTerms::xi\_0n\_t

Definition at line 35 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)


## 7.15 prior\_hessian::ArchimedeanCopula::D2Theta\_IGenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
ArchimedeanCopula.h>
```

Inheritance diagram for prior\_hessian::ArchimedeanCopula::D2Theta\_IGenTerms:

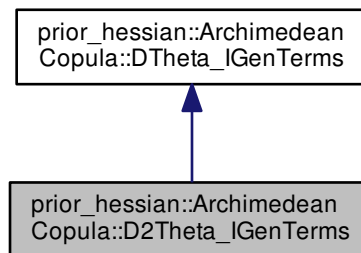

Collaboration diagram for prior\_hessian::ArchimedeanCopula::D2Theta\_IGenTerms:

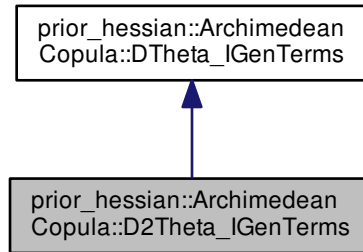

#### Public Attributes

- double `sum_d20_igen_u` = 0
- double `sum_ixi_01_u` = 0
- double `sum_log_d1_igen_u` = 0
- double `sum_d10_igen_u` = 0
- double `sum_ieta_01_11_u` = 0

#### 7.15.1 Detailed Description

Definition at line 43 of file ArchimedeanCopula.h.

#### 7.15.2 Member Data Documentation

7.15.2.1 double `prior_hessian::ArchimedeanCopula::DTheta_IGenTerms::sum_d10_igen_u` = 0 [inherited]

Definition at line 40 of file ArchimedeanCopula.h.

7.15.2.2 double `prior_hessian::ArchimedeanCopula::D2Theta_IGenTerms::sum_d20_igen_u` = 0

Definition at line 44 of file ArchimedeanCopula.h.

7.15.2.3 double `prior_hessian::ArchimedeanCopula::DTheta_IGenTerms::sum_ieta_01_11_u` = 0 [inherited]

Definition at line 41 of file ArchimedeanCopula.h.

7.15.2.4 double `prior_hessian::ArchimedeanCopula::D2Theta_IGenTerms::sum_ixi_01_u` = 0

Definition at line 45 of file ArchimedeanCopula.h.

7.15.2.5 `double prior_hessian::ArchimedeanCopula::DTheta_lGenTerms::sum_log_d1_igen_u = 0` [inherited]

Definition at line 39 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)

## 7.16 prior\_hessian::ArchimedeanCopula::D\_GenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
ArchimedeanCopula.h>
```

Inheritance diagram for prior\_hessian::ArchimedeanCopula::D\_GenTerms:



### Public Attributes

- double [log\\_dn\\_gen\\_t](#)
- double [eta\\_n\\_np1\\_t](#)

### 7.16.1 Detailed Description

Definition at line 13 of file ArchimedeanCopula.h.

### 7.16.2 Member Data Documentation

7.16.2.1 `double prior_hessian::ArchimedeanCopula::D_GenTerms::eta_n_np1_t`

Definition at line 15 of file ArchimedeanCopula.h.

## 7.16.2.2 double prior\_hessian::ArchimedeanCopula::D\_GenTerms::log\_dn\_gen\_t

Definition at line 14 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)

## 7.17 prior\_hessian::ArchimedeanCopula::D\_IGenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
ArchimedeanCopula.h>
```

Inheritance diagram for prior\_hessian::ArchimedeanCopula::D\_IGenTerms:



## Public Attributes

- double [d1\\_igen\\_ui](#)
- double [ieta\\_21\\_ui](#)

## 7.17.1 Detailed Description

Definition at line 21 of file ArchimedeanCopula.h.

## 7.17.2 Member Data Documentation

## 7.17.2.1 double prior\_hessian::ArchimedeanCopula::D\_IGenTerms::d1\_igen\_ui

Definition at line 22 of file ArchimedeanCopula.h.

### 7.17.2.2 double prior\_hessian::ArchimedeanCopula::D\_IGenTerms::ieta\_21\_ui

Definition at line 23 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)


## 7.18 prior\_hessian::meta::disjunction<... > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::disjunction<... >:



Collaboration diagram for prior\_hessian::meta::disjunction<... >:



## 7.18.1 Detailed Description

```
template<class...>  
struct prior_hessian::meta::disjunction<... >
```

Definition at line 72 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)


## 7.19 prior\_hessian::meta::disjunction&lt; B1 &gt; Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::disjunction< B1 >:



Collaboration diagram for prior\_hessian::meta::disjunction< B1 >:



### 7.19.1 Detailed Description

```
template<class B1>
struct prior_hessian::meta::disjunction< B1 >
```

Definition at line 73 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)


### 7.20 prior\_hessian::meta::disjunction< B1, Bn... > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↔
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::disjunction< B1, Bn... >:

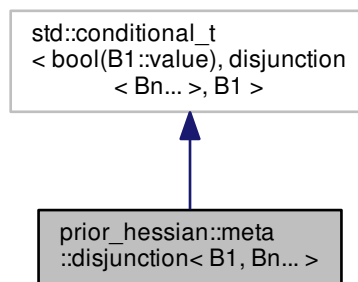

Collaboration diagram for prior\_hessian::meta::disjunction< B1, Bn... >:

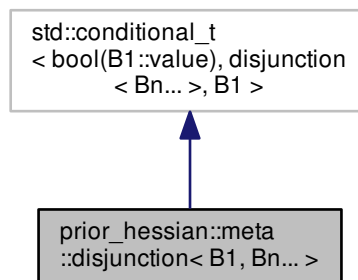

### 7.20.1 Detailed Description

```
template<class B1, class... Bn>
struct prior_hessian::meta::disjunction< B1, Bn... >
```

Definition at line 75 of file Meta.h.

The documentation for this struct was generated from the following file:

- [Meta.h](#)

## 7.21 prior\_hessian::detail::dist\_adaptor\_traits< Dist > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
BoundsAdaptedDist.h>
```

### Public Types

- using [bounds\\_adapted\\_dist](#) = void

### Static Public Attributes

- static constexpr bool [adaptable\\_bounds](#) = false

### 7.21.1 Detailed Description

```
template<class Dist>
class prior_hessian::detail::dist_adaptor_traits< Dist >
```

Definition at line 42 of file BoundsAdaptedDist.h.

### 7.21.2 Member Typedef Documentation

7.21.2.1 `template<class Dist> using prior_hessian::detail::dist_adaptor_traits< Dist >::bounds_adapted_dist = void`

Definition at line 44 of file BoundsAdaptedDist.h.



### 7.21.3 Member Data Documentation

7.21.3.1 `template<class Dist> constexpr bool prior_hessian::detail::dist_adaptor_traits< Dist >::adaptable_bounds = false [static]`

Definition at line 45 of file BoundsAdaptedDist.h.

The documentation for this class was generated from the following file:

- [BoundsAdaptedDist.h](#)

## 7.22 prior\_hessian::detail::dist\_adaptor\_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↔
CopulaDist.h>
```

### Public Types

- using `bounds_adapted_dist` = `CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... >`

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = true

### 7.22.1 Detailed Description

```
template<template< int > class CopulaTemplate, class... DistTs>
struct prior_hessian::detail::dist_adaptor_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > >
```

Definition at line 198 of file CopulaDist.h.

### 7.22.2 Member Typedef Documentation

7.22.2.1 `template<template< int > class CopulaTemplate, class... DistTs> using prior_hessian::detail::dist_adaptor_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > >::bounds_adapted_dist = CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs...>`

Definition at line 200 of file CopulaDist.h.

### 7.22.3 Member Data Documentation

7.22.3.1 `template<template< int > class CopulaTemplate, class... DistTs> constexpr bool prior_hessian::detail::dist_adaptor_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > >::adaptable_bounds = true`  
`[static]`

Definition at line 201 of file CopulaDist.h.

The documentation for this struct was generated from the following file:

- [CopulaDist.h](#)

## 7.23 prior\_hessian::detail::dist\_adaptor\_traits< GammaDist > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵
TruncatedGammaDist.h>
```

### Public Types

- using `bounds_adapted_dist` = `TruncatedGammaDist`

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = false

### 7.23.1 Detailed Description

```
template<>
struct prior_hessian::detail::dist_adaptor_traits< GammaDist >
```

Definition at line 28 of file TruncatedGammaDist.h.

### 7.23.2 Member Typedef Documentation

7.23.2.1 `using prior_hessian::detail::dist_adaptor_traits< GammaDist >::bounds_adapted_dist = TruncatedGammaDist`

Definition at line 30 of file TruncatedGammaDist.h.

### 7.23.3 Member Data Documentation

7.23.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< GammaDist >::adaptable_bounds = false`  
`[static]`

Definition at line 31 of file `TruncatedGammaDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedGammaDist.h](#)

### 7.24 `prior_hessian::detail::dist_adaptor_traits< MultivariateNormalDist< Ndim > >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedMultivariateNormalDist.h>
```

#### Public Types

- using `bounds_adapted_dist = TruncatedMultivariateNormalDist< Ndim >`

#### Static Public Attributes

- static `constexpr bool adaptable_bounds = false`

#### 7.24.1 Detailed Description

```
template<IdxT Ndim>  
struct prior_hessian::detail::dist_adaptor_traits< MultivariateNormalDist< Ndim > >
```

Definition at line 33 of file `TruncatedMultivariateNormalDist.h`.

#### 7.24.2 Member Typedef Documentation

7.24.2.1 `template<IdxT Ndim> using prior_hessian::detail::dist_adaptor_traits< MultivariateNormalDist< Ndim > >::bounds_adapted_dist = TruncatedMultivariateNormalDist<Ndim>`

Definition at line 35 of file `TruncatedMultivariateNormalDist.h`.

### 7.24.3 Member Data Documentation

7.24.3.1 `template<IdxT Ndim> constexpr bool prior_hessian::detail::dist_adaptor_traits< MultivariateNormalDist< Ndim > >::adaptable_bounds = false` [static]

Definition at line 36 of file `TruncatedMultivariateNormalDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedMultivariateNormalDist.h](#)

## 7.25 `prior_hessian::detail::dist_adaptor_traits< NormalDist >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedNormalDist.h>
```

### Public Types

- using `bounds_adapted_dist` = [TruncatedNormalDist](#)

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = false

### 7.25.1 Detailed Description

```
template<>  
struct prior_hessian::detail::dist_adaptor_traits< NormalDist >
```

Definition at line 30 of file `TruncatedNormalDist.h`.

### 7.25.2 Member Typedef Documentation

7.25.2.1 using `prior_hessian::detail::dist_adaptor_traits< NormalDist >::bounds_adapted_dist` = [TruncatedNormalDist](#)

Definition at line 32 of file `TruncatedNormalDist.h`.

### 7.25.3 Member Data Documentation

7.25.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< NormalDist >::adaptable_bounds = false`  
`[static]`

Definition at line 33 of file `TruncatedNormalDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedNormalDist.h](#)

## 7.26 prior\_hessian::detail::dist\_adaptor\_traits< ParetoDist > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵
TruncatedParetoDist.h>
```

### Public Types

- using `bounds_adapted_dist` = `TruncatedParetoDist`

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = false

### 7.26.1 Detailed Description

```
template<>
struct prior_hessian::detail::dist_adaptor_traits< ParetoDist >
```

Definition at line 28 of file `TruncatedParetoDist.h`.

### 7.26.2 Member Typedef Documentation

7.26.2.1 using `prior_hessian::detail::dist_adaptor_traits< ParetoDist >::bounds_adapted_dist` = `TruncatedParetoDist`

Definition at line 30 of file `TruncatedParetoDist.h`.

### 7.26.3 Member Data Documentation

7.26.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< ParetoDist >::adaptable_bounds = false`  
[static]

Definition at line 31 of file `TruncatedParetoDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedParetoDist.h](#)

## 7.27 `prior_hessian::detail::dist_adaptor_traits< ScaledSymmetricBetaDist >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
ScaledSymmetricBetaDist.h>
```

### Public Types

- using `bounds_adapted_dist` = `ScaledSymmetricBetaDist`

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = true

### 7.27.1 Detailed Description

```
template<>  
struct prior_hessian::detail::dist_adaptor_traits< ScaledSymmetricBetaDist >
```

Definition at line 35 of file `ScaledSymmetricBetaDist.h`.

### 7.27.2 Member Typedef Documentation

7.27.2.1 using `prior_hessian::detail::dist_adaptor_traits< ScaledSymmetricBetaDist >::bounds_adapted_dist` = `ScaledSymmetricBetaDist`

Definition at line 37 of file `ScaledSymmetricBetaDist.h`.

### 7.27.3 Member Data Documentation

7.27.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< ScaledSymmetricBetaDist >::adaptable_bounds = true` `[static]`

Definition at line 38 of file `ScaledSymmetricBetaDist.h`.

The documentation for this struct was generated from the following file:

- [ScaledSymmetricBetaDist.h](#)

## 7.28 `prior_hessian::detail::dist_adaptor_traits< SymmetricBetaDist >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
ScaledSymmetricBetaDist.h>
```

### Public Types

- using `bounds_adapted_dist` = `ScaledSymmetricBetaDist`

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = false

### 7.28.1 Detailed Description

```
template<>
struct prior_hessian::detail::dist_adaptor_traits< SymmetricBetaDist >
```

Definition at line 28 of file `ScaledSymmetricBetaDist.h`.

### 7.28.2 Member Typedef Documentation

7.28.2.1 using `prior_hessian::detail::dist_adaptor_traits< SymmetricBetaDist >::bounds_adapted_dist` = `ScaledSymmetricBetaDist`

Definition at line 30 of file `ScaledSymmetricBetaDist.h`.

### 7.28.3 Member Data Documentation

7.28.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< SymmetricBetaDist >::adaptable_bounds = false`  
[static]

Definition at line 31 of file ScaledSymmetricBetaDist.h.

The documentation for this struct was generated from the following file:

- [ScaledSymmetricBetaDist.h](#)

## 7.29 prior\_hessian::detail::dist\_adaptor\_traits< TruncatedGammaDist > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedGammaDist.h>
```

### Public Types

- using `bounds_adapted_dist = TruncatedGammaDist`

### Static Public Attributes

- static constexpr bool `adaptable_bounds = true`

### 7.29.1 Detailed Description

```
template<>  
struct prior_hessian::detail::dist_adaptor_traits< TruncatedGammaDist >
```

Definition at line 35 of file TruncatedGammaDist.h.

### 7.29.2 Member Typedef Documentation

7.29.2.1 `using prior_hessian::detail::dist_adaptor_traits< TruncatedGammaDist >::bounds_adapted_dist = TruncatedGammaDist`

Definition at line 37 of file TruncatedGammaDist.h.



### 7.29.3 Member Data Documentation

7.29.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< TruncatedGammaDist >::adaptable_bounds = true`  
`[static]`

Definition at line 38 of file `TruncatedGammaDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedGammaDist.h](#)

### 7.30 `prior_hessian::detail::dist_adaptor_traits< TruncatedMultivariateNormalDist< Ndim > >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedMultivariateNormalDist.h>
```

#### Public Types

- using `bounds_adapted_dist = TruncatedMultivariateNormalDist< Ndim >`

#### Static Public Attributes

- static `constexpr bool adaptable_bounds = true`

#### 7.30.1 Detailed Description

```
template<IdxT Ndim>  
struct prior_hessian::detail::dist_adaptor_traits< TruncatedMultivariateNormalDist< Ndim > >
```

Definition at line 40 of file `TruncatedMultivariateNormalDist.h`.

#### 7.30.2 Member Typedef Documentation

7.30.2.1 `template<IdxT Ndim> using prior_hessian::detail::dist_adaptor_traits< TruncatedMultivariateNormalDist< Ndim > >::bounds_adapted_dist = TruncatedMultivariateNormalDist<Ndim>`

Definition at line 42 of file `TruncatedMultivariateNormalDist.h`.

### 7.30.3 Member Data Documentation

7.30.3.1 `template<IdxT Ndim> constexpr bool prior_hessian::detail::dist_adaptor_traits< TruncatedMultivariateNormalDist< Ndim >>::adaptable_bounds = true` [static]

Definition at line 43 of file `TruncatedMultivariateNormalDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedMultivariateNormalDist.h](#)

## 7.31 `prior_hessian::detail::dist_adaptor_traits< TruncatedNormalDist >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedNormalDist.h>
```

### Public Types

- using `bounds_adapted_dist` = `TruncatedNormalDist`

### Static Public Attributes

- static constexpr bool `adaptable_bounds` = true

### 7.31.1 Detailed Description

```
template<>  
struct prior_hessian::detail::dist_adaptor_traits< TruncatedNormalDist >
```

Definition at line 37 of file `TruncatedNormalDist.h`.

### 7.31.2 Member Typedef Documentation

7.31.2.1 using `prior_hessian::detail::dist_adaptor_traits< TruncatedNormalDist >::bounds_adapted_dist` = `TruncatedNormalDist`

Definition at line 39 of file `TruncatedNormalDist.h`.

### 7.31.3 Member Data Documentation

#### 7.31.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< TruncatedNormalDist >::adaptable_bounds = true` [static]

Definition at line 40 of file `TruncatedNormalDist.h`.

The documentation for this struct was generated from the following file:

- [TruncatedNormalDist.h](#)

### 7.32 `prior_hessian::detail::dist_adaptor_traits< TruncatedParetoDist >` Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedParetoDist.h>
```

#### Public Types

- using `bounds_adapted_dist` = `TruncatedParetoDist`

#### Static Public Attributes

- static constexpr bool `adaptable_bounds` = true

#### 7.32.1 Detailed Description

```
template<>  
struct prior_hessian::detail::dist_adaptor_traits< TruncatedParetoDist >
```

Definition at line 35 of file `TruncatedParetoDist.h`.

#### 7.32.2 Member Typedef Documentation

##### 7.32.2.1 `using prior_hessian::detail::dist_adaptor_traits< TruncatedParetoDist >::bounds_adapted_dist = TruncatedParetoDist`

Definition at line 37 of file `TruncatedParetoDist.h`.

### 7.32.3 Member Data Documentation

#### 7.32.3.1 `constexpr bool prior_hessian::detail::dist_adaptor_traits< TruncatedParetoDist >::adaptable_bounds = true` [static]

Definition at line 38 of file `TruncatedParetoDist.h`.


The documentation for this struct was generated from the following file:

- [TruncatedParetoDist.h](#)

### 7.33 prior\_hessian::ArchimedeanCopula::DTheta\_GenTerms Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
ArchimedeanCopula.h>
```

Inheritance diagram for `prior_hessian::ArchimedeanCopula::DTheta_GenTerms`:

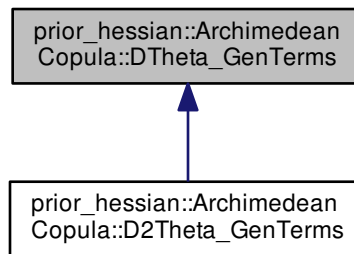

#### Public Attributes

- double [log\\_dn\\_gen\\_t](#)
- double [eta\\_0n\\_1n\\_t](#)

#### 7.33.1 Detailed Description

Definition at line 30 of file `ArchimedeanCopula.h`.

#### 7.33.2 Member Data Documentation

##### 7.33.2.1 `double prior_hessian::ArchimedeanCopula::DTheta_GenTerms::eta_0n_1n_t`

Definition at line 32 of file `ArchimedeanCopula.h`.

### 7.33.2.2 `double prior_hessian::ArchimedeanCopula::DTheta_GenTerms::log_dn_gen_t`

Definition at line 31 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)

## 7.34 `prior_hessian::ArchimedeanCopula::DTheta_IGenTerms` Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↔
ArchimedeanCopula.h>
```

Inheritance diagram for `prior_hessian::ArchimedeanCopula::DTheta_IGenTerms`:

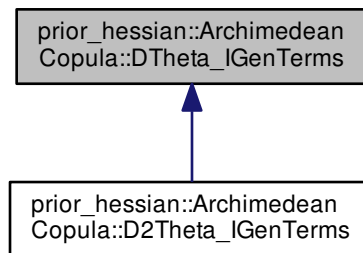

### Public Attributes

- double `sum_log_d1_igen_u` = 0
- double `sum_d10_igen_u` = 0
- double `sum_ieta_01_11_u` = 0

### 7.34.1 Detailed Description

Definition at line 38 of file ArchimedeanCopula.h.

### 7.34.2 Member Data Documentation

#### 7.34.2.1 `double prior_hessian::ArchimedeanCopula::DTheta_IGenTerms::sum_d10_igen_u = 0`

Definition at line 40 of file ArchimedeanCopula.h.

7.34.2.2 double prior\_hessian::ArchimedeanCopula::DTheta\_IGenTerms::sum\_ieta\_01\_11\_u = 0

Definition at line 41 of file ArchimedeanCopula.h.

7.34.2.3 double prior\_hessian::ArchimedeanCopula::DTheta\_IGenTerms::sum\_log\_d1\_igen\_u = 0

Definition at line 39 of file ArchimedeanCopula.h.


The documentation for this struct was generated from the following file:

- [ArchimedeanCopula.h](#)


## 7.35 prior\_hessian::eulerian\_number< N, M > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
EulerianPolynomial.h>
```

Inheritance diagram for prior\_hessian::eulerian\_number< N, M >:

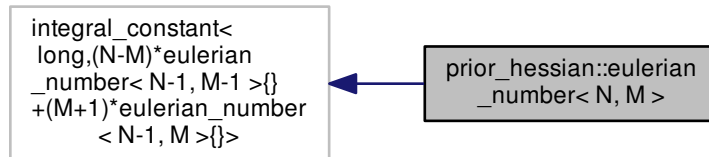

Collaboration diagram for prior\_hessian::eulerian\_number< N, M >:

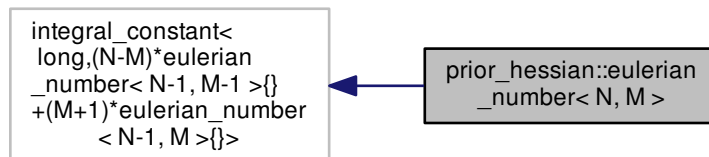

### 7.35.1 Detailed Description

```
template<long N, long M>
struct prior_hessian::eulerian_number< N, M >
```

Definition at line 17 of file EulerianPolynomial.h.


The documentation for this struct was generated from the following file:

- [EulerianPolynomial.h](#)


### 7.36 prior\_hessian::eulerian\_number< 0, M > Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
EulerianPolynomial.h>
```

Inheritance diagram for prior\_hessian::eulerian\_number< 0, M >:



Collaboration diagram for prior\_hessian::eulerian\_number< 0, M >:



## 7.36.1 Detailed Description

```
template<long M>
struct prior_hessian::eulerian_number< 0, M >
```

Definition at line 20 of file EulerianPolynomial.h.

The documentation for this struct was generated from the following file:


- [EulerianPolynomial.h](#)

## 7.37 prior\_hessian::GammaDist Class Reference

Gamma distribution.


```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵
GammaDist.h>
```

Inheritance diagram for prior\_hessian::GammaDist:

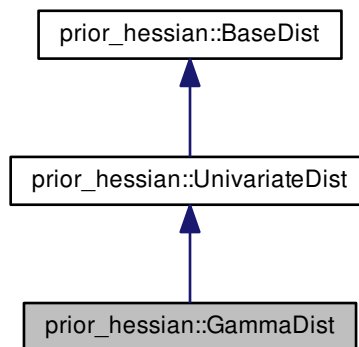



Collaboration diagram for `prior_hessian::GammaDist`:

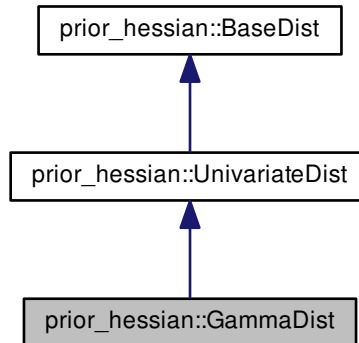

### Public Types

- using `NparamsVecT` = `arma::Col< double >::fixed< _num_params >`

### Public Member Functions

- `GammaDist` (double `scale`, double `shape`)
- `GammaDist` ()
- `template<class Vec , meta::ConstructableIfNotSelfT< Vec, GammaDist > = true>`  
`GammaDist` (const Vec &`params`)
- double `get_param` (int `idx`) const
- void `set_param` (int `idx`, double `val`)
- `NparamsVecT params` () const
- `template<class Vec >`  
void `set_params` (const Vec &`p`)
- void `set_params` (double `scale`, double `shape`)
- bool `operator==` (const `GammaDist` &`o`) const
- bool `operator!=` (const `GammaDist` &`o`) const
- double `scale` () const
- double `shape` () const
- void `set_scale` (double `val`)
- void `set_shape` (double `val`)
- double `mean` () const
- double `median` () const
- double `cdf` (double `x`) const
- double `icdf` (double `u`) const
- double `pdf` (double `x`) const
- double `llh` (double `x`) const
- double `rllh` (double `x`) const

- double [grad](#) (double x) const
- double [grad2](#) (double x) const
- void [grad\\_grad2\\_accumulate](#) (double x, double &g, double &g2) const
- template<class RngT >  
double [sample](#) (RngT &rng) const
- template<class IterT >  
void [set\\_params\\_iter](#) (IterT &params)

### Static Public Member Functions

- static constexpr [IdxT num\\_params](#) ()
- static constexpr double [lbound](#) ()
- static constexpr double [ubound](#) ()
- static bool [in\\_bounds](#) (double u)
- static const [StringVecT & param\\_names](#) ()
- static const [NparamsVecT & param\\_lbound](#) ()
- static const [NparamsVecT & param\\_ubound](#) ()
- static bool [check\\_params](#) (double [shape](#), double [scale](#))
- template<class Vec >  
static bool [check\\_params](#) (const Vec &params)
- template<class IterT >  
static bool [check\\_params\\_iter](#) (IterT &params)
- static constexpr [IdxT num\\_dim](#) ()

### Static Protected Member Functions

- static void [check\\_bounds](#) (double [lbound](#), double [ubound](#))

#### 7.37.1 Detailed Description

Gamma distribution.

Definition at line 22 of file GammaDist.h.

#### 7.37.2 Member Typedef Documentation

7.37.2.1 using prior\_hessian::GammaDist::NparamsVecT = arma::Col<double>::fixed<\_num\_params>

Definition at line 26 of file GammaDist.h.

#### 7.37.3 Constructor & Destructor Documentation

7.37.3.1 prior\_hessian::GammaDist::GammaDist ( double *scale*, double *shape* )

Definition at line 25 of file GammaDist.cpp.

### 7.37.3.2 `prior_hessian::GammaDist::GammaDist ( ) [inline]`

Definition at line 43 of file GammaDist.h.

Referenced by `param_ubound()`.

Here is the caller graph for this function:




### 7.37.3.3 `template<class Vec , meta::ConstructableIfNotSelf< Vec, GammaDist > = true> prior_hessian::GammaDist::GammaDist ( const Vec & params ) [inline], [explicit]`

Definition at line 45 of file GammaDist.h.

References `get_param()`, and `set_param()`.

Here is the call graph for this function:

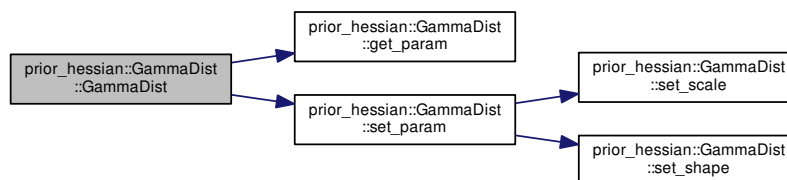


## 7.37.4 Member Function Documentation

### 7.37.4.1 `double prior_hessian::GammaDist::cdf ( double x ) const`

Definition at line 53 of file GammaDist.cpp.

Referenced by `median()`.

Here is the caller graph for this function:



**7.37.4.2** `void prior_hessian::UnivariateDist::check_bounds ( double lbound, double ubound )` `[static]`, `[protected]`, `[inherited]`

Definition at line 17 of file `UnivariateDist.cpp`.

Referenced by `prior_hessian::UnivariateDist::UnivariateDist()`.

Here is the caller graph for this function:




**7.37.4.3** `bool prior_hessian::GammaDist::check_params ( double shape, double scale )` `[inline]`, `[static]`

Definition at line 107 of file `GammaDist.h`.

Referenced by `check_params_iter()`, and `param_ubound()`.

Here is the caller graph for this function:



7.37.4.4 `template<class Vec > bool prior_hessian::GammaDist::check_params ( const Vec & params ) [static]`

Definition at line 113 of file GammaDist.h.

References `params()`.

Here is the call graph for this function:




7.37.4.5 `template<class IterT > bool prior_hessian::GammaDist::check_params_iter ( IterT & params ) [static]`

Definition at line 183 of file GammaDist.h.

References `check_params()`, `scale()`, and `shape()`.

Referenced by `median()`.

Here is the call graph for this function:

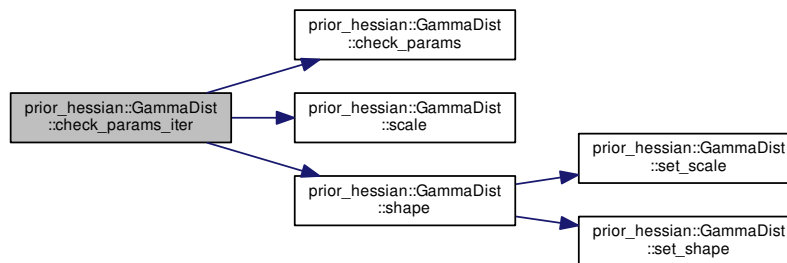

Here is the caller graph for this function:



7.37.4.6 `double prior_hessian::GammaDist::get_param ( int idx ) const` `[inline]`

Definition at line 119 of file GammaDist.h.

Referenced by GammaDist().

Here is the caller graph for this function:



7.37.4.7 `double prior_hessian::GammaDist::grad ( double x ) const` `[inline]`

Definition at line 155 of file GammaDist.h.

Referenced by median().

Here is the caller graph for this function:



7.37.4.8 `double prior_hessian::GammaDist::grad2 ( double x ) const` `[inline]`

Definition at line 161 of file GammaDist.h.

Referenced by median().

Here is the caller graph for this function:



7.37.4.9 `void prior_hessian::GammaDist::grad_grad2_accumulate ( double x, double & g, double & g2 ) const [inline]`

Definition at line 167 of file GammaDist.h.

Referenced by median().

Here is the caller graph for this function:



7.37.4.10 `double prior_hessian::GammaDist::icdf ( double u ) const`

Definition at line 58 of file GammaDist.cpp.

Referenced by median().

Here is the caller graph for this function:




7.37.4.11 `static bool prior_hessian::GammaDist::in_bounds ( double u ) [inline],[static]`

Definition at line 32 of file GammaDist.h.

References `lbound()`, and `ubound()`.

Here is the call graph for this function:

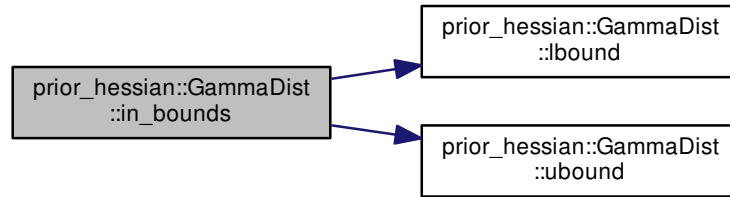

7.37.4.12 `static constexpr double prior_hessian::GammaDist::lbound ( ) [inline], [static]`

Definition at line 30 of file `GammaDist.h`.

Referenced by `in_bounds()`.

Here is the caller graph for this function:



7.37.4.13 `double prior_hessian::GammaDist::llh ( double x ) const`


Definition at line 72 of file `GammaDist.cpp`.

References `rllh()`, `scale()`, and `shape()`.


Referenced by `median()`.



Here is the call graph for this function:

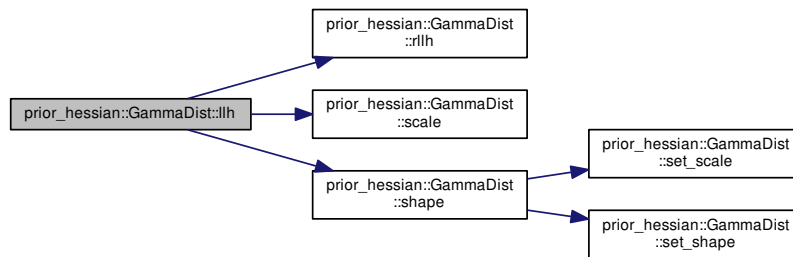

Here is the caller graph for this function:



**7.37.4.14** `double prior_hessian::GammaDist::mean ( ) const [inline]`


Definition at line 61 of file `GammaDist.h`.

**7.37.4.15** `double prior_hessian::GammaDist::median ( ) const [inline]`

Definition at line 62 of file `GammaDist.h`.

References `cdf()`, `check_params_iter()`, `grad()`, `grad2()`, `grad_grad2_accumulate()`, `icdf()`, `llh()`, `pdf()`, `rllh()`, `sample()`, and `set_params_iter()`.

Here is the call graph for this function:

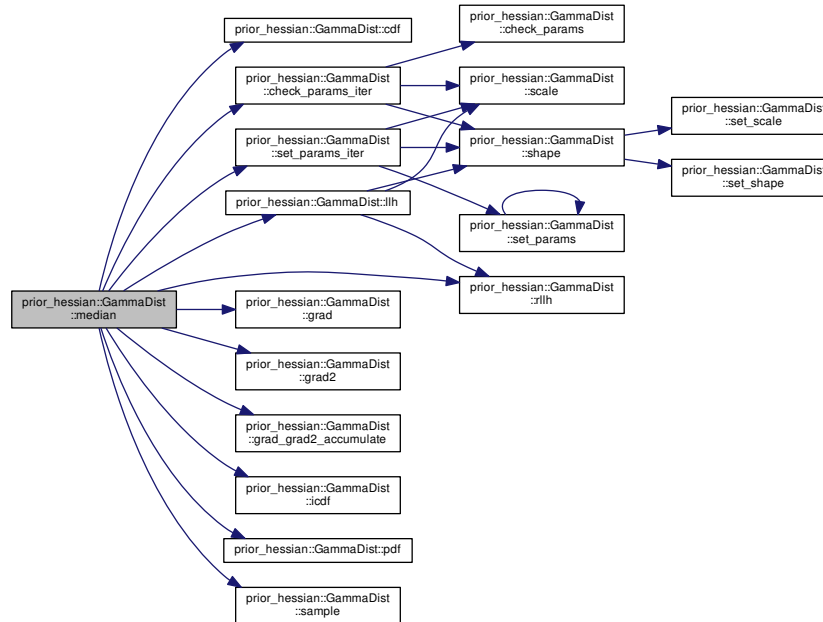

**7.37.4.16** `static constexpr IdxT prior_hessian::UnivariateDist::num_dim ( )` `[inline]`, `[static]`, `[inherited]`

Definition at line 17 of file UnivariateDist.h.

**7.37.4.17** `static constexpr IdxT prior_hessian::GammaDist::num_params ( )` `[inline]`, `[static]`


Definition at line 29 of file GammaDist.h.

**7.37.4.18** `bool prior_hessian::GammaDist::operator!=( const GammaDist & o ) const` `[inline]`

Definition at line 54 of file GammaDist.h.

References `operator==( )`.

Here is the call graph for this function:



7.37.4.19 `bool prior_hessian::GammaDist::operator==( const GammaDist & o ) const [inline]`

Definition at line 53 of file GammaDist.h.

Referenced by `operator!=( )`.

Here is the caller graph for this function:



7.37.4.20 `static const NparamsVecT& prior_hessian::GammaDist::param_lbound ( ) [inline],[static]`

Definition at line 35 of file GammaDist.h.

7.37.4.21 `static const StringVecT& prior_hessian::GammaDist::param_names ( ) [inline],[static]`


Definition at line 34 of file GammaDist.h.

7.37.4.22 `static const NparamsVecT& prior_hessian::GammaDist::param_ubound ( ) [inline],[static]`

Definition at line 36 of file GammaDist.h.

References `check_params()`, `GammaDist()`, `params()`, `scale()`, and `shape()`.

Here is the call graph for this function:

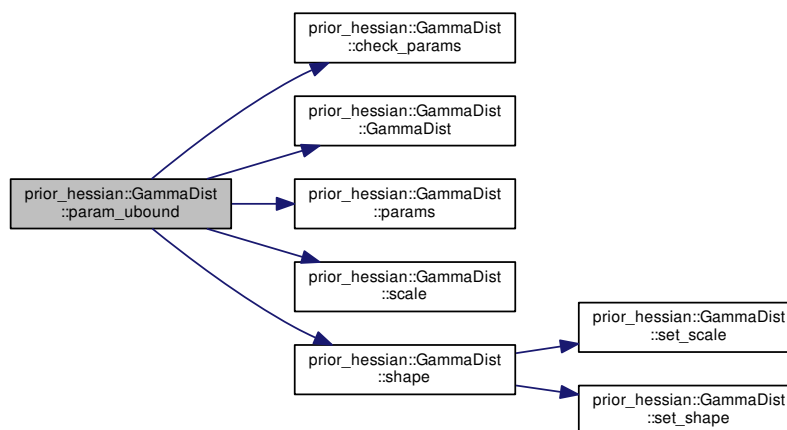


#### 7.37.4.23 NparamsVecT prior\_hessian::GammaDist::params ( ) const [inline]

Definition at line 49 of file GammaDist.h.

Referenced by check\_params(), and param\_ubound().

Here is the caller graph for this function:

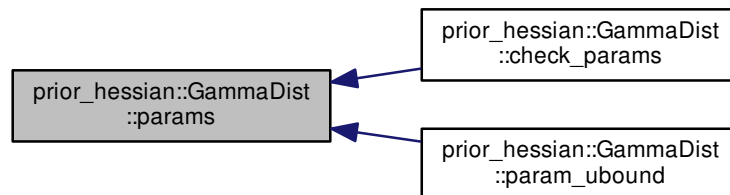


#### 7.37.4.24 double prior\_hessian::GammaDist::pdf ( double x ) const

Definition at line 65 of file GammaDist.cpp.

Referenced by median().

Here is the caller graph for this function:



#### 7.37.4.25 double prior\_hessian::GammaDist::rllh ( double x ) const [inline]

Definition at line 149 of file GammaDist.h.

Referenced by llh(), and median().

Here is the caller graph for this function:



7.37.4.26 `template<class RngT > double prior_hessian::GammaDist::sample ( RngT & rng ) const`

Definition at line 175 of file GammaDist.h.

Referenced by `median()`.

Here is the caller graph for this function:




7.37.4.27 `double prior_hessian::GammaDist::scale ( ) const [inline]`

Definition at line 56 of file GammaDist.h.

Referenced by `check_params_iter()`, `llh()`, `param_ubound()`, and `set_params_iter()`.

Here is the caller graph for this function:

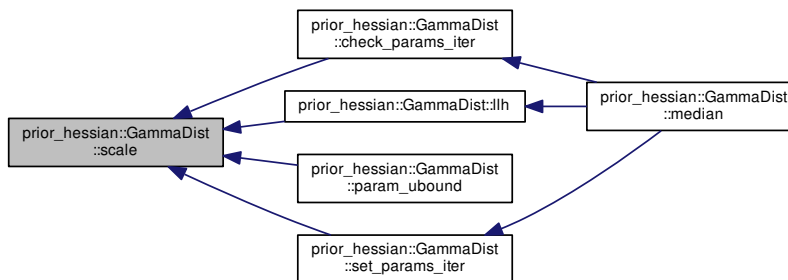


7.37.4.28 `void prior_hessian::GammaDist::set_param ( int idx, double val ) [inline]`

Definition at line 133 of file GammaDist.h.

References `set_scale()`, and `set_shape()`.

Referenced by `GammaDist()`.

Here is the call graph for this function:

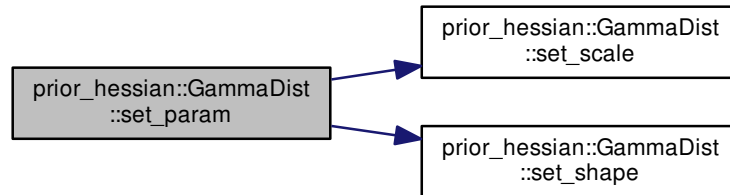

Here is the caller graph for this function:




**7.37.4.29** `template<class Vec > void prior_hessian::GammaDist::set_params ( const Vec & p ) [inline]`

Definition at line 51 of file `GammaDist.h`.


References `set_params()`.

Referenced by `set_params()`, and `set_params_iter()`.

Here is the call graph for this function:



Here is the caller graph for this function:



#### 7.37.4.30 void prior\_hessian::GammaDist::set\_params ( double *scale*, double *shape* )

Definition at line 46 of file GammaDist.cpp.


#### 7.37.4.31 template<class IterT > void prior\_hessian::GammaDist::set\_params\_iter ( IterT & *params* )

Definition at line 191 of file GammaDist.h.

References `scale()`, `set_params()`, and `shape()`.

Referenced by `median()`.

Here is the call graph for this function:

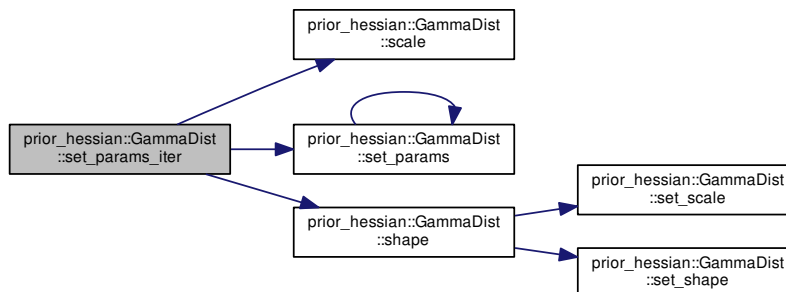

Here is the caller graph for this function:




## 7.37.4.32 void prior\_hessian::GammaDist::set\_scale ( double val )

Definition at line 34 of file GammaDist.cpp.

Referenced by set\_param(), and shape().

Here is the caller graph for this function:

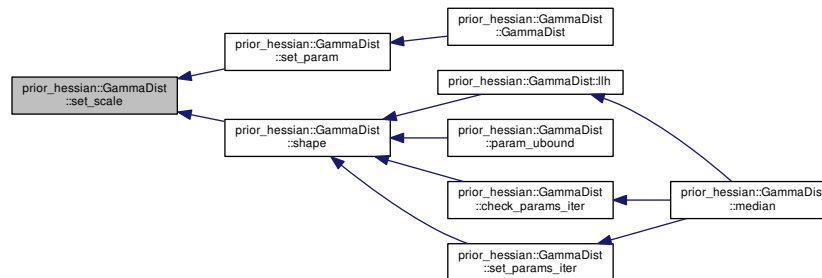


## 7.37.4.33 void prior\_hessian::GammaDist::set\_shape ( double val )

Definition at line 40 of file GammaDist.cpp.

Referenced by set\_param(), and shape().

Here is the caller graph for this function:

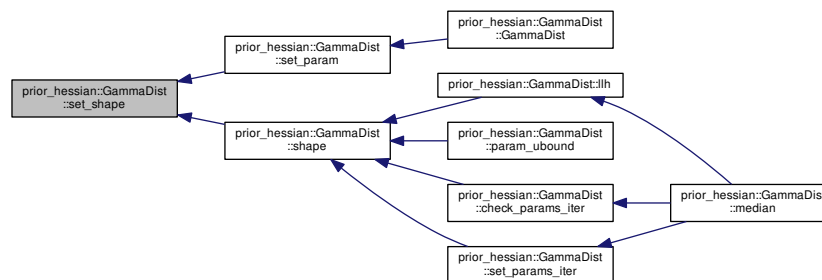




### 7.37.4.34 `double prior_hessian::GammaDist::shape ( ) const [inline]`

Definition at line 57 of file GammaDist.h.


References `set_scale()`, and `set_shape()`.

Referenced by `check_params_iter()`, `llh()`, `param_ubound()`, and `set_params_iter()`.

Here is the call graph for this function:

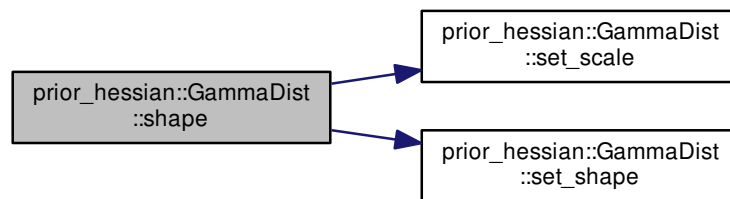

Here is the caller graph for this function:

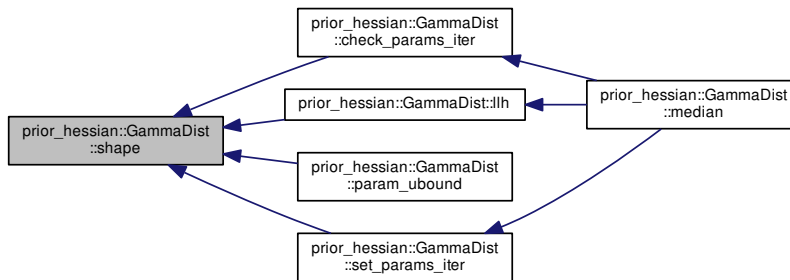

### 7.37.4.35 `static constexpr double prior_hessian::GammaDist::ubound ( ) [inline],[static]`

Definition at line 31 of file GammaDist.h.

Referenced by `in_bounds()`.

Here is the caller graph for this function:



The documentation for this class was generated from the following files:


- [GammaDist.h](#)
- [GammaDist.cpp](#)

## 7.38 prior\_hessian::IndexError Struct Reference


Indicates a index access was out of bounds.

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for `prior_hessian::IndexError`:

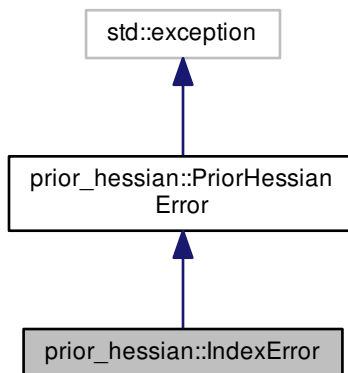

Collaboration diagram for `prior_hessian::IndexError`:

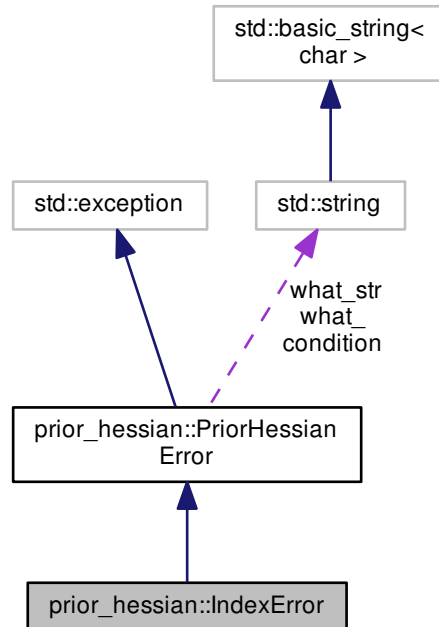

#### Public Member Functions

- [IndexError](#) (std::string message)
- `const char * what () const noexcept override`

#### Protected Attributes

- std::string [condition](#)
- std::string [what\\_str](#)
- std::string [what\\_](#)

#### 7.38.1 Detailed Description

Indicates a index access was out of bounds.

Definition at line 65 of file `PriorHessianError.h`.

### 7.38.2 Constructor & Destructor Documentation

#### 7.38.2.1 `prior_hessian::IndexError::IndexError ( std::string message )` `[inline]`

Definition at line 67 of file `PriorHessianError.h`.

### 7.38.3 Member Function Documentation

#### 7.38.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` `[inline]`, `[override]`, `[noexcept]`, `[inherited]`

Definition at line 56 of file `PriorHessianError.h`.

### 7.38.4 Member Data Documentation

#### 7.38.4.1 `std::string prior_hessian::PriorHessianError::condition` `[protected]`, `[inherited]`

Definition at line 46 of file `PriorHessianError.h`.

#### 7.38.4.2 `std::string prior_hessian::PriorHessianError::what_` `[protected]`, `[inherited]`

Definition at line 48 of file `PriorHessianError.h`.

#### 7.38.4.3 `std::string prior_hessian::PriorHessianError::what_str` `[protected]`, `[inherited]`

Definition at line 47 of file `PriorHessianError.h`.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


### 7.39 prior\_hessian::InvalidOperationError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::InvalidOperationError:

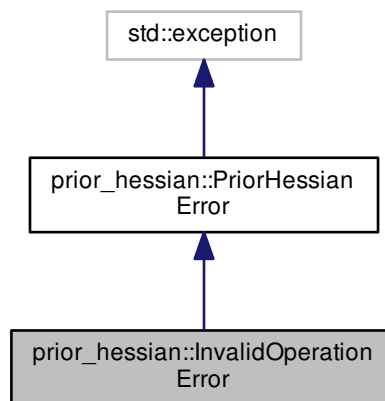

Collaboration diagram for prior\_hessian::InvalidOperationError:

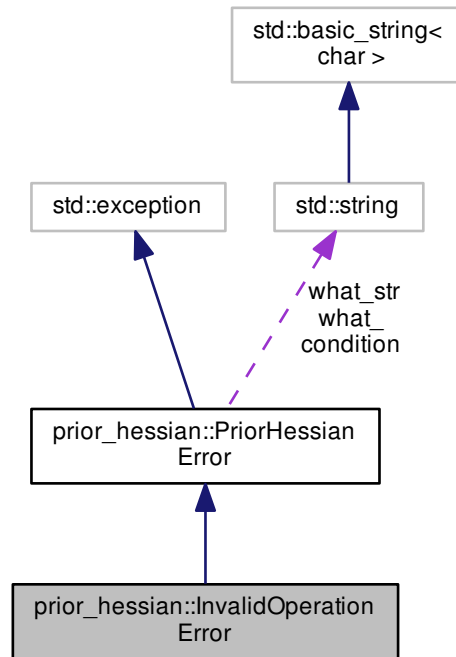

#### Public Member Functions

- [InvalidOperationError](#) (std::string message)
- const char \* [what](#) () const noexcept override

#### Protected Attributes

- std::string [condition](#)
- std::string [what\\_str](#)
- std::string [what\\_](#)

#### 7.39.1 Detailed Description

Definition at line 70 of file PriorHessianError.h.

#### 7.39.2 Constructor & Destructor Documentation

7.39.2.1 `prior_hessian::InvalidOperationError::InvalidOperationError ( std::string message )` `[inline]`

Definition at line 72 of file PriorHessianError.h.

### 7.39.3 Member Function Documentation

7.39.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` `[inline]`, `[override]`, `[noexcept]`, `[inherited]`

Definition at line 56 of file `PriorHessianError.h`.

### 7.39.4 Member Data Documentation

7.39.4.1 `std::string prior_hessian::PriorHessianError::condition` `[protected]`, `[inherited]`

Definition at line 46 of file `PriorHessianError.h`.

7.39.4.2 `std::string prior_hessian::PriorHessianError::what_` `[protected]`, `[inherited]`

Definition at line 48 of file `PriorHessianError.h`.

7.39.4.3 `std::string prior_hessian::PriorHessianError::what_str` `[protected]`, `[inherited]`

Definition at line 47 of file `PriorHessianError.h`.

The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)

## 7.40 `prior_hessian::meta::is_copula< T, U >` Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
Meta.h>
```

### Static Public Attributes

- static constexpr bool `value` = `decltype(is_copula::test(std::declval<U>()))::value`

### 7.40.1 Detailed Description

```
template<template< template< int > class, class... > class T, typename U>
class prior_hessian::meta::is_copula< T, U >
```

Definition at line 102 of file `Meta.h`.

## 7.40.2 Member Data Documentation

7.40.2.1 `template<template< template< int > class, class... > class T, typename U > constexpr bool  
prior_hessian::meta::is_copula< T, U >::value = decltype(is_copula::test(std::declval<U>()))::value [static]`

Definition at line 107 of file Meta.h.


The documentation for this class was generated from the following file:

- [Meta.h](#)


## 7.41 prior\_hessian::meta::is\_numeric\_template\_of&lt; class, typename &gt; Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::is\_numeric\_template\_of< class, typename >:



Collaboration diagram for prior\_hessian::meta::is\_numeric\_template\_of< class, typename >:





### 7.41.1 Detailed Description

```
template<template< int... > class, typename>
struct prior_hessian::meta::is_numeric_template_of< class, typename >
```

Definition at line 86 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)

### 7.42 prior\_hessian::meta::is\_numeric\_template\_of< ClassNumericTemplate, ClassNumericTemplate< Is... > > Struct Template Reference


```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::is\_numeric\_template\_of< ClassNumericTemplate, ClassNumeric←  
Template< Is... > >:

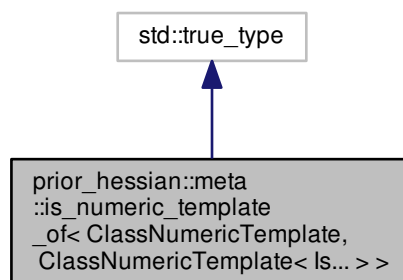

Collaboration diagram for prior\_hessian::meta::is\_numeric\_template\_of< ClassNumericTemplate, ClassNumeric←

Template< Is... > >:

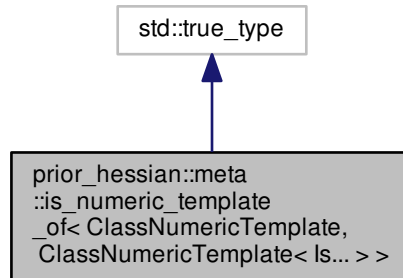

#### 7.42.1 Detailed Description

```
template<template< int... > class ClassNumericTemplate, int... Is>
struct prior_hessian::meta::is_numeric_template_of< ClassNumericTemplate, ClassNumericTemplate< Is... > >
```

Definition at line 89 of file Meta.h.

The documentation for this struct was generated from the following file:

- [Meta.h](#)

### 7.43 prior\_hessian::meta::is\_subclass\_of\_numeric\_template< T, U > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
Meta.h>
```

#### Static Public Attributes

- static constexpr bool [value](#) = decltype(is\_subclass\_of\_numeric\_template::test(std::declval<U>()))::value

#### 7.43.1 Detailed Description

```
template<template< int... > class T, typename U>
class prior_hessian::meta::is_subclass_of_numeric_template< T, U >
```

Definition at line 92 of file Meta.h.

### 7.43.2 Member Data Documentation

7.43.2.1 `template<template< int... > class T, typename U> constexpr bool prior_hessian::meta::is_subclass_of_↵  
 numeric_template< T, U >::value = decltype(is_subclass_of_numeric_template::test(std::declval<U>()))::value  
 [static]`

Definition at line 97 of file Meta.h.

The documentation for this class was generated from the following file:


- [Meta.h](#)

### 7.44 prior\_hessian::meta::is\_template\_of< class, typename > Struct Template Reference


```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵  

Meta.h>
```

Inheritance diagram for `prior_hessian::meta::is_template_of< class, typename >`:



Collaboration diagram for `prior_hessian::meta::is_template_of< class, typename >`:



## 7.44.1 Detailed Description

```
template<template< typename... > class, typename>  
struct prior_hessian::meta::is_template_of< class, typename >
```

Definition at line 79 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)


## 7.45 prior\_hessian::meta::is\_template\_of&lt; ClassTemplate, ClassTemplate&lt; Ts... &gt; &gt; Struct Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↔  
Meta.h>
```

Inheritance diagram for prior\_hessian::meta::is\_template\_of< ClassTemplate, ClassTemplate< Ts... > >:

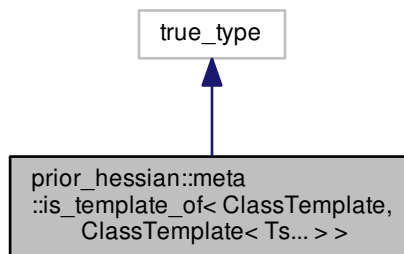

Collaboration diagram for prior\_hessian::meta::is\_template\_of< ClassTemplate, ClassTemplate< Ts... > >:

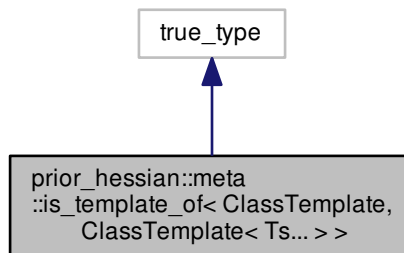

### 7.45.1 Detailed Description

```
template<template< typename... > class ClassTemplate, typename... Ts>
struct prior_hessian::meta::is_template_of< ClassTemplate, ClassTemplate< Ts... > >
```

Definition at line 82 of file Meta.h.


The documentation for this struct was generated from the following file:

- [Meta.h](#)

### 7.46 prior\_hessian::mcmc::MCMCData< Ndim > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
TruncatedMultivariateDist.h>
```

Inheritance diagram for prior\_hessian::mcmc::MCMCData< Ndim >:

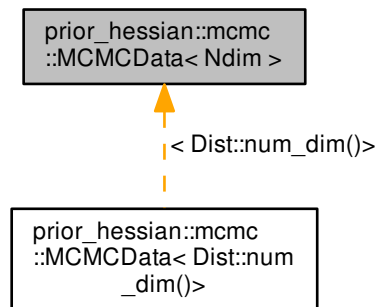

#### Public Types

- using [NdimVecT](#) = arma::Col< double >::fixed< Ndim >

#### Public Member Functions

- [MCMCData](#) ()
- [MCMCData](#) (const [MCMCData](#)< Ndim > &o)
- [MCMCData](#)< Ndim > & [operator=](#) (const [MCMCData](#)< Ndim > &o)

## Public Attributes

- [NdimVecT sample](#)
- double [rllh](#)
- int [nsample](#) =0
- std::mutex [mutex](#)

### 7.46.1 Detailed Description

```
template<int Ndim>  
class prior_hessian::mcmc::MCMCData< Ndim >
```

Definition at line 22 of file TruncatedMultivariateDist.h.

### 7.46.2 Member Typedef Documentation

7.46.2.1 `template<int Ndim> using prior_hessian::mcmc::MCMCData< Ndim >::NdimVecT = arma::Col<double>::fixed<Ndim>`

Definition at line 24 of file TruncatedMultivariateDist.h.

### 7.46.3 Constructor & Destructor Documentation

7.46.3.1 `template<int Ndim> prior_hessian::mcmc::MCMCData< Ndim >::MCMCData ( ) [inline]`

Definition at line 25 of file TruncatedMultivariateDist.h.

7.46.3.2 `template<int Ndim> prior_hessian::mcmc::MCMCData< Ndim >::MCMCData ( const MCMCData< Ndim > & o ) [inline]`

Definition at line 26 of file TruncatedMultivariateDist.h.

### 7.46.4 Member Function Documentation

7.46.4.1 `template<int Ndim> MCMCData<Ndim>& prior_hessian::mcmc::MCMCData< Ndim >::operator= ( const MCMCData< Ndim > & o ) [inline]`

Definition at line 37 of file TruncatedMultivariateDist.h.

### 7.46.5 Member Data Documentation

7.46.5.1 `template<int Ndim> std::mutex prior_hessian::mcmc::MCMCData< Ndim >::mutex` [mutable]

Definition at line 51 of file TruncatedMultivariateDist.h.

Referenced by `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::MCMCData()`, and `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::operator=()`.

7.46.5.2 `template<int Ndim> int prior_hessian::mcmc::MCMCData< Ndim >::nsample =0`

Definition at line 50 of file TruncatedMultivariateDist.h.

Referenced by `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::MCMCData()`, and `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::operator=()`.

7.46.5.3 `template<int Ndim> double prior_hessian::mcmc::MCMCData< Ndim >::rlh`

Definition at line 49 of file TruncatedMultivariateDist.h.

Referenced by `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::MCMCData()`, `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::operator=()`, and `prior_hessian::TruncatedMultivariateDist< Dist >::sample()`.

7.46.5.4 `template<int Ndim> NdimVecT prior_hessian::mcmc::MCMCData< Ndim >::sample`

Definition at line 48 of file TruncatedMultivariateDist.h.

Referenced by `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::MCMCData()`, `prior_hessian::TruncatedMultivariateDist< Dist >::mean()`, `prior_hessian::mcmc::MCMCData< Dist::num_dim()>::operator=()`, and `prior_hessian::TruncatedMultivariateDist< Dist >::sample()`.


The documentation for this class was generated from the following file:

- [TruncatedMultivariateDist.h](#)


## 7.47 prior\_hessian::MultivariateDist Class Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/MultivariateDist.h>
```

Inheritance diagram for `prior_hessian::MultivariateDist`:



Collaboration diagram for prior\_hessian::MultivariateDist:

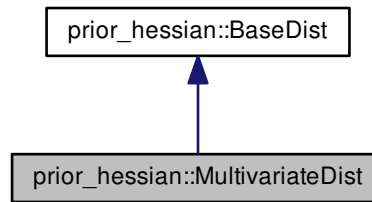

#### Public Member Functions

- [MultivariateDist](#) ()

#### Static Protected Member Functions

- `template<class Vec >`  
static void [check\\_bounds](#) (const Vec &lbound, const Vec &ubound)

#### 7.47.1 Detailed Description

Definition at line 15 of file `MultivariateDist.h`.

#### 7.47.2 Constructor & Destructor Documentation

##### 7.47.2.1 `prior_hessian::MultivariateDist::MultivariateDist ( )` `[inline]`

Definition at line 18 of file `MultivariateDist.h`.

#### 7.47.3 Member Function Documentation

##### 7.47.3.1 `template<class Vec > static void prior_hessian::MultivariateDist::check_bounds ( const Vec & lbound, const Vec & ubound )` `[inline]`, `[static]`, `[protected]`

Definition at line 57 of file `MultivariateDist.h`.

The documentation for this class was generated from the following file:

- [MultivariateDist.h](#)




## 7.48 prior\_hessian::MultivariateNormalDist< Ndim > Class Template Reference


Multivariate Normal distribution.

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
MultivariateNormalDist.h>
```

Inheritance diagram for prior\_hessian::MultivariateNormalDist< Ndim >:

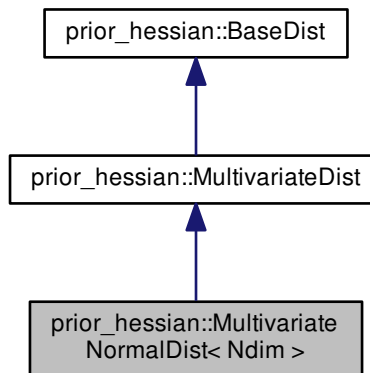

Collaboration diagram for prior\_hessian::MultivariateNormalDist< Ndim >:

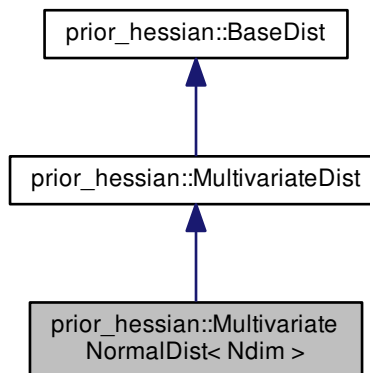

## Public Types

- using `NdimVecT` = `arma::Col< double >::fixed< Ndim >`
- using `NdimMatT` = `arma::Mat< double >::fixed< Ndim, Ndim >`
- using `NparamsVecT` = `arma::Col< double >::fixed< _num_params >`

## Public Member Functions

- `MultivariateNormalDist` ()
- `template<class Vec , class Mat >`  
`MultivariateNormalDist` (Vec &&mu, Mat &&sigma)
- `const NdimVecT & mu` () const
- `const NdimMatT & sigma` () const
- `const NdimMatT & sigma_inv` () const
- `template<class Vec >`  
void `set_mu` (Vec &&val)
- `template<class Mat >`  
void `set_sigma` (Mat &&val)
- `bool operator==` (const `MultivariateNormalDist`< Ndim > &o) const
- `bool operator!=` (const `MultivariateNormalDist`< Ndim > &o) const
- `double get_param` (IdxT idx) const
- `NparamsVecT params` () const
- `template<class Vec >`  
void `set_params` (const Vec &p)
- `template<class Vec , class Mat >`  
void `set_params` (Vec &&mu, Mat &&sigma)
- `NdimVecT mean` () const
- `NdimVecT mode` () const
- `template<class Vec >`  
double `cdf` (Vec x) const
- `template<class Vec >`  
double `pdf` (const Vec &x) const
- `template<class Vec >`  
double `llh` (const Vec &x) const
- `template<class Vec >`  
double `rllh` (const Vec &x) const
- `template<class Vec >`  
`NdimVecT grad` (const Vec &x) const
- `template<class Vec >`  
`NdimVecT grad2` (const Vec &x) const
- `template<class Vec >`  
`NdimMatT hess` (const Vec &x) const
- `template<class Vec , class Vec2 >`  
void `grad_grad2_accumulate` (const Vec &x, Vec2 &g, Vec2 &g2) const
- `template<class Vec , class Vec2 , class Mat >`  
void `grad_hess_accumulate` (const Vec &x, Vec2 &g, Mat &hess) const
- `template<class RngT >`  
`NdimVecT sample` (RngT &rng) const
- `template<class IterT >`  
void `append_params` (IterT &params) const
- `template<class IterT >`  
void `set_params_iter` (IterT &params)
- `template<>`  
double `cdf` (Vec x) const

### Static Public Member Functions

- static constexpr `IdxT num_params ()`
- static constexpr `IdxT num_dim ()`
- static const `NdimVecT & lbound ()`
- static const `NdimVecT & ubound ()`
- template<class Vec >  
static bool `in_bounds (const Vec &u)`
- static const `StringVecT & param_names ()`
- static const `NparamsVecT & param_lbound ()`
- static const `NparamsVecT & param_ubound ()`
- template<class Vec >  
static bool `check_mu (const Vec &mu)`
- template<class Mat >  
static bool `check_sigma (const Mat &sigma)`
- template<class Vec , class Mat >  
static bool `check_params (const Vec &mu, const Mat &sigma)`
- template<class Vec >  
static bool `check_params (const Vec &params)`
- template<class IterT >  
static bool `check_params_iter (IterT &params)`

### Static Protected Member Functions

- template<class Vec >  
static void `check_bounds (const Vec &lbound, const Vec &ubound)`

#### 7.48.1 Detailed Description

```
template<IdxT Ndim>
class prior_hessian::MultivariateNormalDist< Ndim >
```

Multivariate Normal distribution.

Definition at line 18 of file MultivariateNormalDist.h.

#### 7.48.2 Member Typedef Documentation

7.48.2.1 `template<IdxT Ndim> using prior_hessian::MultivariateNormalDist< Ndim >::NdimMatT = arma::Mat<double>::fixed<Ndim,Ndim>`

Definition at line 24 of file MultivariateNormalDist.h.

7.48.2.2 `template<IdxT Ndim> using prior_hessian::MultivariateNormalDist< Ndim >::NdimVecT = arma::Col<double>::fixed<Ndim>`

Definition at line 23 of file MultivariateNormalDist.h.

7.48.2.3 `template<IdxT Ndim> using prior_hessian::MultivariateNormalDist< Ndim >::NparamsVecT = arma::Col<double>::fixed<_num_params>`

Definition at line 25 of file MultivariateNormalDist.h.

### 7.48.3 Constructor & Destructor Documentation

7.48.3.1 `template<IdxT Ndim> prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist ( )`

Definition at line 172 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`.

Here is the caller graph for this function:




7.48.3.2 `template<IdxT Ndim> template<class Vec , class Mat > prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist ( Vec && mu, Mat && sigma )`

Definition at line 185 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::set_mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::set_sigma()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`.

Here is the call graph for this function:

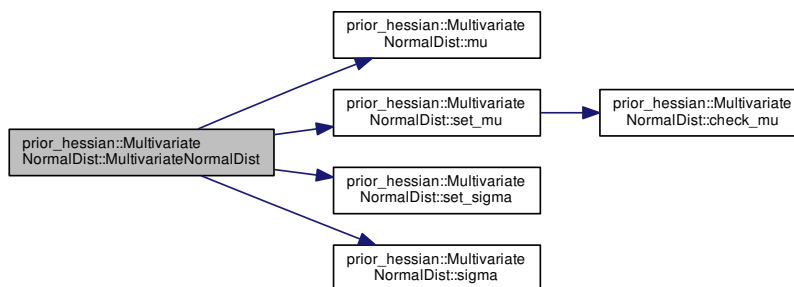

## 7.48.4 Member Function Documentation

7.48.4.1 `template<IdxT Ndim> template<class IterT > void prior_hessian::MultivariateNormalDist< Ndim >::append_params ( IterT & params ) const`

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the caller graph for this function:




7.48.4.2 `template<IdxT Ndim> template<class Vec > double prior_hessian::MultivariateNormalDist< Ndim >::cdf ( Vec x ) const`

Definition at line 480 of file `MultivariateNormalDist.h`.

References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, `prior_hessian::genz::mvn_cdf_genz()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

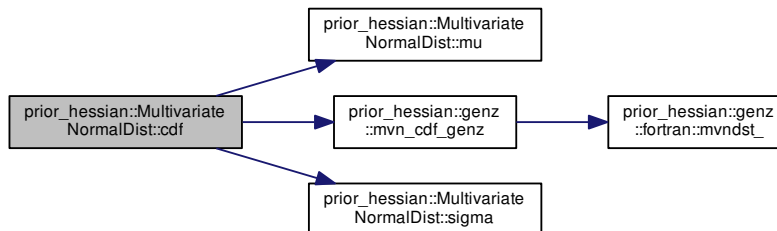

Here is the caller graph for this function:




7.48.4.3 `template<> double prior_hessian::MultivariateNormalDist< 2 >::cdf ( Vec x ) const`

Definition at line 489 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, `prior_hessian::owen_bvn_cdf()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`.

Here is the call graph for this function:

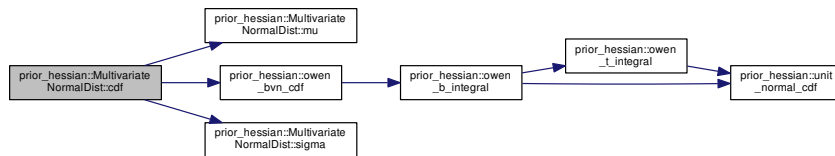7.48.4.4 `template<class Vec > static void prior_hessian::MultivariateDist::check_bounds ( const Vec & lbound, const Vec & ubound ) [inline],[static],[protected],[inherited]`


Definition at line 57 of file MultivariateDist.h.

7.48.4.5 `template<IdxT Ndim> template<class Vec > bool prior_hessian::MultivariateNormalDist< Ndim >::check_mu ( const Vec & mu ) [static]`

Definition at line 194 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::check_params()`, `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_mu()`.

Here is the caller graph for this function:

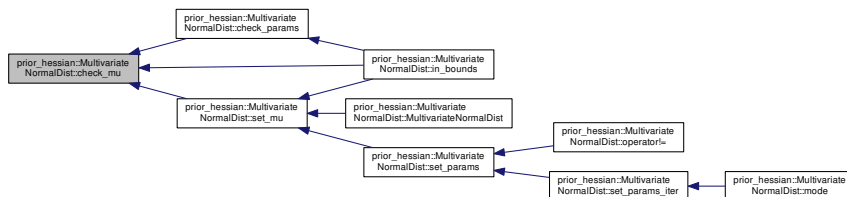


7.48.4.6 `template<IdxT Ndim> template<class Vec , class Mat > bool prior_hessian::MultivariateNormalDist< Ndim >::check_params ( const Vec & mu, const Mat & sigma ) [static]`

Definition at line 211 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::check_mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::check_sigma()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`.

Here is the call graph for this function:

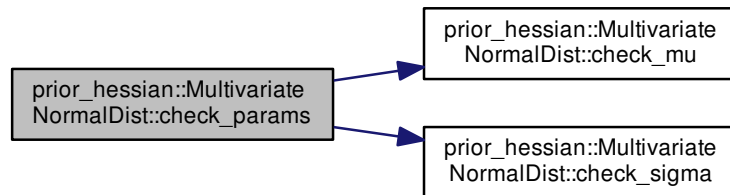

Here is the caller graph for this function:




7.48.4.7 `template<IdxT Ndim> template<class Vec > bool prior_hessian::MultivariateNormalDist< Ndim >::check_params ( const Vec & params ) [static]`

Definition at line 218 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::check_mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::check_sigma()`, and `prior_hessian::MultivariateNormalDist< Ndim >::num_params()`.

Here is the call graph for this function:

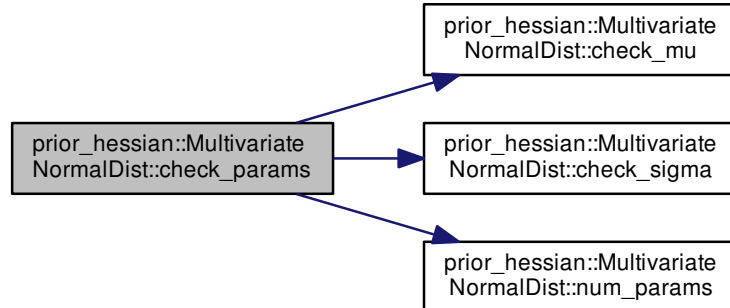


7.48.4.8 `template<IdxT Ndim> template<class IterT > bool prior_hessian::MultivariateNormalDist< Ndim >::check_params_iter ( IterT & params ) [static]`

Definition at line 226 of file `MultivariateNormalDist.h`.

References `prior_hessian::MultivariateNormalDist< Ndim >::check_sigma()`, and `prior_hessian::MultivariateNormalDist< Ndim >::num_params()`.


Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

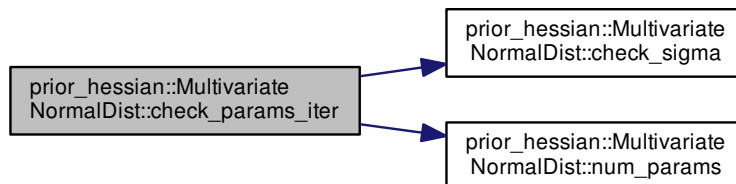



Here is the caller graph for this function:




**7.48.4.9** `template<IdxT Ndim> template<class Mat > bool prior_hessian::MultivariateNormalDist< Ndim >::check_sigma ( const Mat & sigma ) [static]`

Definition at line 201 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::check_params()`, `prior_hessian::MultivariateNormalDist< Ndim >::check_params_iter()`, and `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`.

Here is the caller graph for this function:

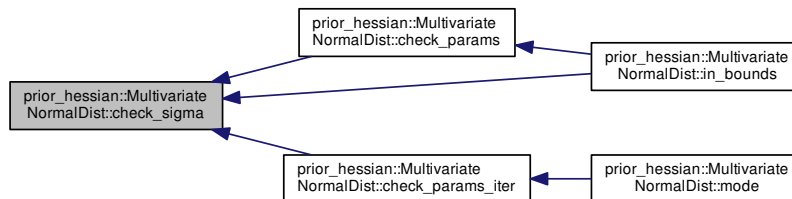

**7.48.4.10** `template<IdxT Ndim> double prior_hessian::MultivariateNormalDist< Ndim >::get_param ( IdxT idx ) const`

Definition at line 440 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::operator!==( )`.

Here is the caller graph for this function:




7.48.4.11 `template<IdxT Ndim> template<class Vec > MultivariateNormalDist< Ndim >::NdimVecT  
prior_hessian::MultivariateNormalDist< Ndim >::grad ( const Vec & x ) const`

Definition at line 522 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

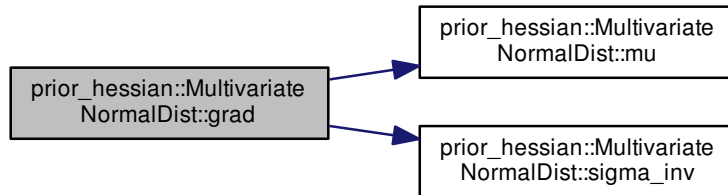

Here is the caller graph for this function:




7.48.4.12 `template<IdxT Ndim> template<class Vec > MultivariateNormalDist< Ndim >::NdimVecT  
prior_hessian::MultivariateNormalDist< Ndim >::grad2 ( const Vec & x ) const`

Definition at line 530 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.48.4.13 `template<IdxT Ndim> template<class Vec , class Vec2 > void prior_hessian::MultivariateNormalDist< Ndim >::grad_grad2_accumulate ( const Vec & x, Vec2 & g, Vec2 & g2 ) const`

Definition at line 545 of file `MultivariateNormalDist.h`.

References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

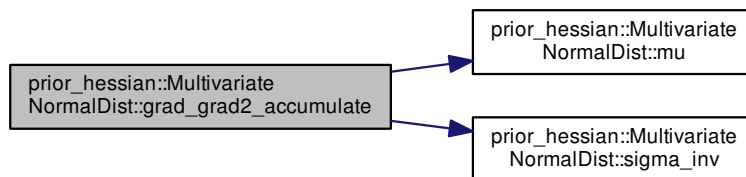

Here is the caller graph for this function:




7.48.4.14 `template<IdxT Ndim> template<class Vec , class Vec2 , class Mat > void prior_hessian::MultivariateNormalDist< Ndim >::grad_hess_accumulate ( const Vec & x, Vec2 & g, Mat & hess ) const`

Definition at line 553 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

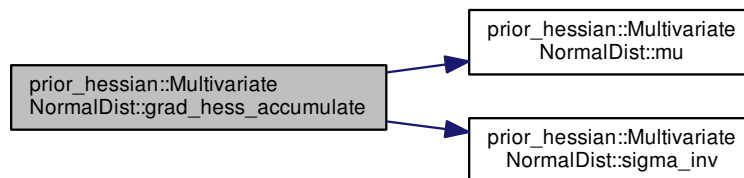

Here is the caller graph for this function:



7.48.4.15 `template<IdxT Ndim> template<class Vec > MultivariateNormalDist< Ndim >::NdimMatT  
prior_hessian::MultivariateNormalDist< Ndim >::hess ( const Vec & x ) const`

Definition at line 538 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.48.4.16 `template<IdxT Ndim> template<class Vec > static bool prior_hessian::MultivariateNormalDist< Ndim  
>::in_bounds ( const Vec & u ) [inline],[static]`

Definition at line 32 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::check_mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::check_params()`, `prior_hessian::MultivariateNormalDist< Ndim >::check_sigma()`, `prior_hessian::MultivariateNormalDist< Ndim >::lbound()`, `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist()`, `prior_hessian::MultivariateNormalDist< Ndim >::operator==()`, `prior_hessian::MultivariateNormalDist< Ndim >::param_lbound()`, `prior_hessian::MultivariateNormalDist< Ndim >::param_names()`, `prior_hessian::MultivariateNormalDist< Ndim >::param_ubound()`, `prior_hessian::MultivariateNormalDist< Ndim >::params()`, `prior_hessian::MultivariateNormalDist< Ndim >::set_mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::set_sigma()`, `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`, `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`, and `prior_hessian::MultivariateNormalDist< Ndim >::ubound()`.

Here is the call graph for this function:

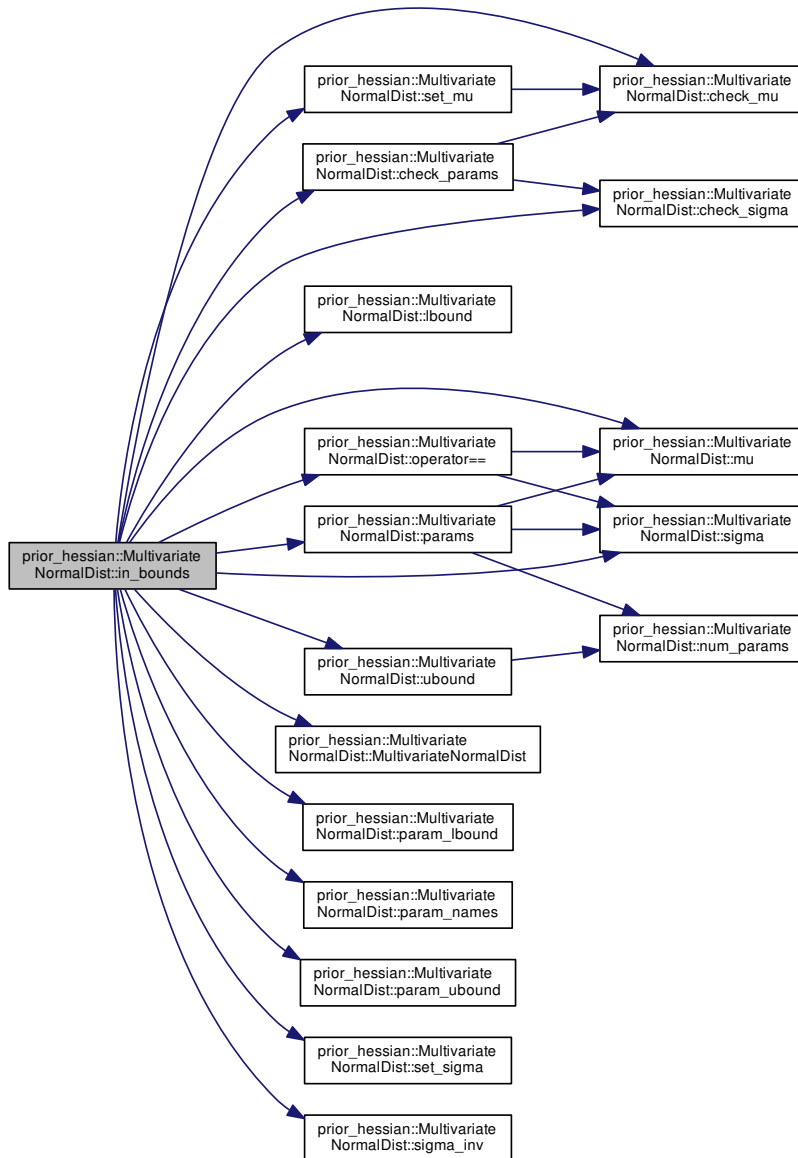


7.48.4.17 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NdimVecT & prior_hessian::MultivariateNormalDist< Ndim >::lbound ( ) [static]`

Definition at line 296 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, and `prior_hessian::MultivariateNormalDist< Ndim >::num_dim()`.

Here is the caller graph for this function:




7.48.4.18 `template<IdxT Ndim> template<class Vec > double prior_hessian::MultivariateNormalDist< Ndim >::llh ( const Vec & x ) const`

Definition at line 506 of file MultivariateNormalDist.h.


References `prior_hessian::MultivariateNormalDist< Ndim >::rllh()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`, and `prior_hessian::MultivariateNormalDist< Ndim >::pdf()`.

Here is the call graph for this function:

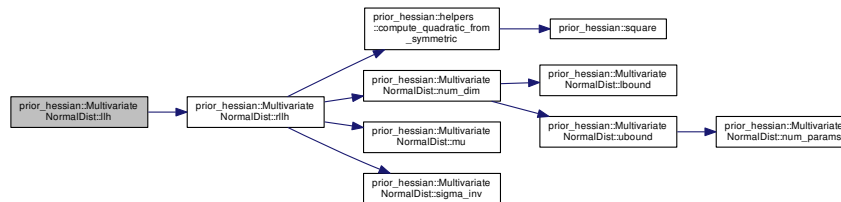

Here is the caller graph for this function:








#### 7.48.4.21 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NdimVecT & prior_hessian::MultivariateNormalDist< Ndim >::mu ( ) const`

Definition at line 374 of file `MultivariateNormalDist.h`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::cdf()`, `prior_hessian::MultivariateNormalDist< Ndim >::grad()`, `prior_hessian::MultivariateNormalDist< Ndim >::grad_grad2_accumulate()`, `prior_hessian::MultivariateNormalDist< Ndim >::grad_hess_accumulate()`, `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, `prior_hessian::MultivariateNormalDist< Ndim >::mean()`, `prior_hessian::MultivariateNormalDist< Ndim >::mode()`, `prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist()`, `prior_hessian::MultivariateNormalDist< Ndim >::operator==( )`, `prior_hessian::MultivariateNormalDist< Ndim >::params()`, `prior_hessian::MultivariateNormalDist< Ndim >::rllh()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sample()`.

Here is the caller graph for this function:

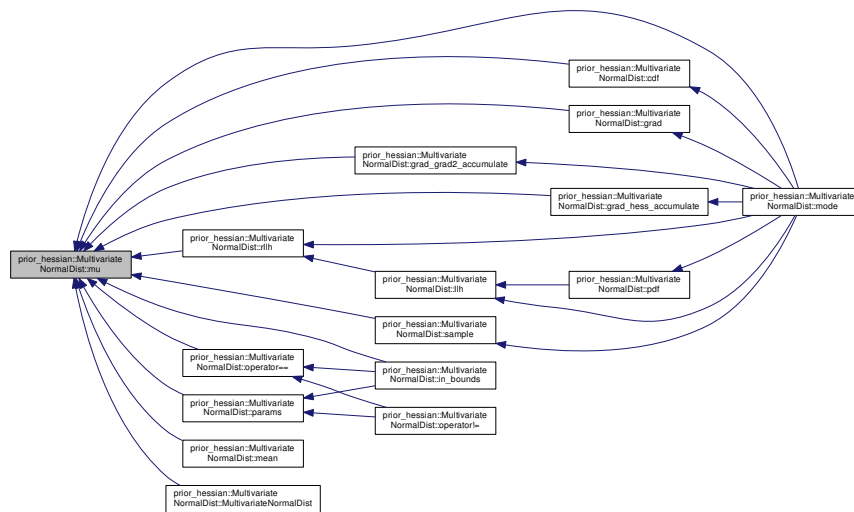


#### 7.48.4.22 `template<IdxT Ndim> static constexpr IdxT prior_hessian::MultivariateNormalDist< Ndim >::num_dim ( ) [inline], [static]`

Definition at line 28 of file `MultivariateNormalDist.h`.


References `prior_hessian::MultivariateNormalDist< Ndim >::lbound()`, and `prior_hessian::MultivariateNormalDist< Ndim >::ubound()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::rllh()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.48.4.23 `template<IdxT Ndim> static constexpr IdxT prior_hessian::MultivariateNormalDist< Ndim >::num_params ( ) [inline], [static]`

Definition at line 27 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::check_params()`, `prior_hessian::MultivariateNormalDist< Ndim >::check_params_iter()`, `prior_hessian::MultivariateNormalDist< Ndim >::params()`, `prior_hessian::MultivariateNormalDist< Ndim >::set_params()`, and `prior_hessian::MultivariateNormalDist< Ndim >::ubound()`.

Here is the caller graph for this function:

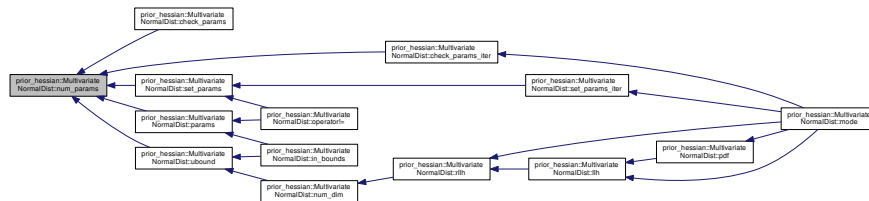


7.48.4.24 `template<IdxT Ndim> bool prior_hessian::MultivariateNormalDist< Ndim >::operator!=( const MultivariateNormalDist< Ndim > & o ) const [inline]`

Definition at line 59 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::get_param()`, `prior_hessian::MultivariateNormalDist< Ndim >::operator==( )`, `prior_hessian::MultivariateNormalDist< Ndim >::params()`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_params()`.

Here is the call graph for this function:

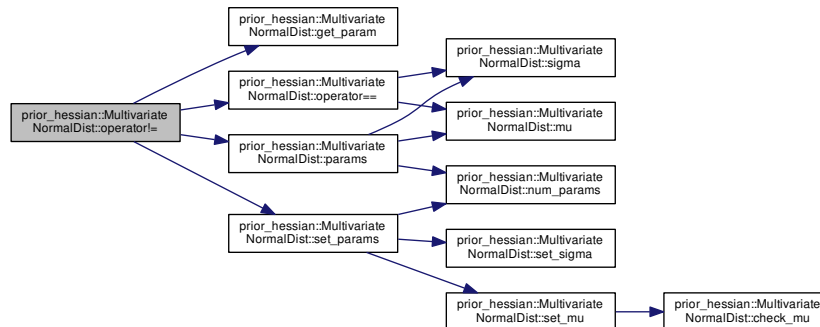


7.48.4.25 `template<IdxT Ndim> bool prior_hessian::MultivariateNormalDist< Ndim >::operator==( const MultivariateNormalDist< Ndim > & o ) const`

Definition at line 424 of file MultivariateNormalDist.h.


References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, and `prior_hessian::MultivariateNormalDist< Ndim >::operator!=( )`.

Here is the call graph for this function:

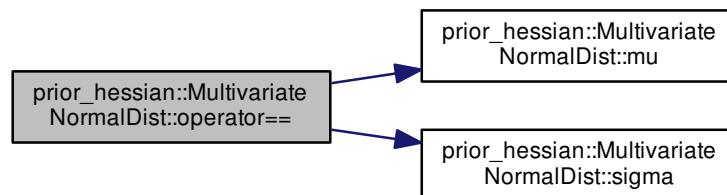

Here is the caller graph for this function:

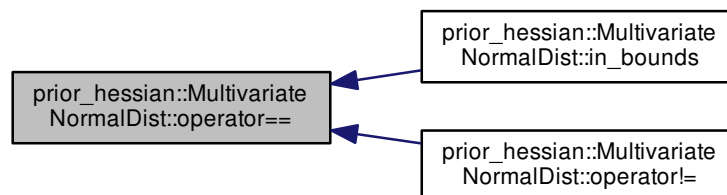


7.48.4.26 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NparamsVecT & prior_hessian::MultivariateNormalDist< Ndim >::param_lbound( ) [static]`

Definition at line 278 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`.

Here is the caller graph for this function:



7.48.4.27 `template<IdxT Ndim> const StringVecT & prior_hessian::MultivariateNormalDist< Ndim >::param_names ( )`  
`[static]`

Definition at line 269 of file `MultivariateNormalDist.h`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`.

Here is the caller graph for this function:




7.48.4.28 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NparamsVecT & prior_hessian::MultivariateNormalDist< Ndim >::param_ubound ( )`  
`[static]`

Definition at line 287 of file `MultivariateNormalDist.h`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`.

Here is the caller graph for this function:




7.48.4.29 `template<IdxT Ndim> MultivariateNormalDist< Ndim >::NparamsVecT prior_hessian::MultivariateNormalDist< Ndim >::params ( ) const`

Definition at line 431 of file MultivariateNormalDist.h.


References `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::num_params()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, and `prior_hessian::MultivariateNormalDist< Ndim >::operator!=( )`.

Here is the call graph for this function:

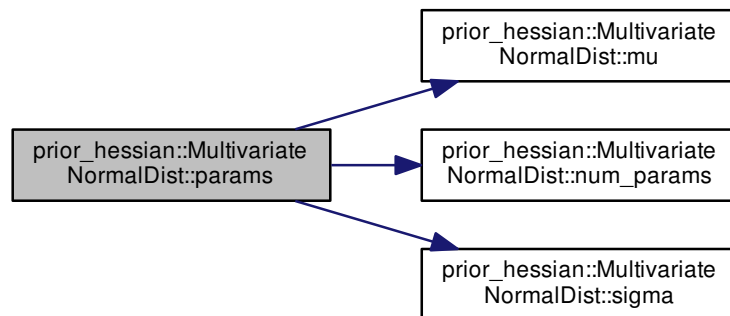

Here is the caller graph for this function:

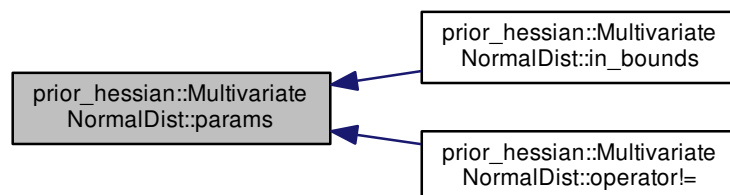


7.48.4.30 `template<IdxT Ndim> template<class Vec > double prior_hessian::MultivariateNormalDist< Ndim >::pdf (const Vec & x ) const`

Definition at line 496 of file MultivariateNormalDist.h.


References `prior_hessian::MultivariateNormalDist< Ndim >::llh()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

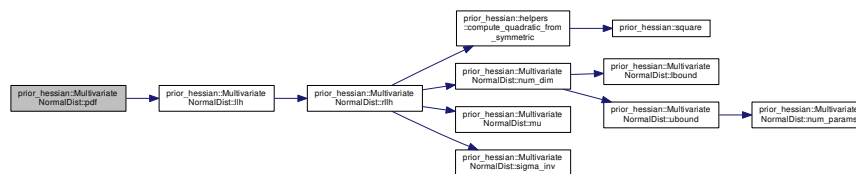

Here is the caller graph for this function:




7.48.4.31 `template<IdxT Ndim> template<class Vec > double prior_hessian::MultivariateNormalDist< Ndim >::rllh (const Vec & x ) const`

Definition at line 514 of file MultivariateNormalDist.h.


References `prior_hessian::helpers::compute_quadratic_from_symmetric()`, `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, `prior_hessian::MultivariateNormalDist< Ndim >::num_dim()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::llh()`, and `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

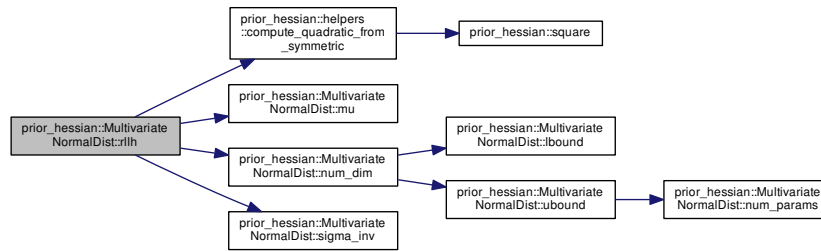

Here is the caller graph for this function:




**7.48.4.32** `template<IdxT Ndim> template<class RngT > MultivariateNormalDist< Ndim >::NdimVecT  
prior_hessian::MultivariateNormalDist< Ndim >::sample ( RngT & rng ) const`

Definition at line 562 of file MultivariateNormalDist.h.

References `prior_hessian::constants::log2pi`, `prior_hessian::MultivariateNormalDist< Ndim >::mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sigma()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

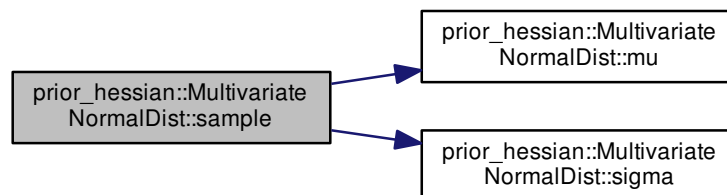

Here is the caller graph for this function:



7.48.4.33 `template<IdxT Ndim> template<class Vec > void prior_hessian::MultivariateNormalDist< Ndim >::set_mu ( Vec && val )`

Definition at line 394 of file `MultivariateNormalDist.h`.


References `prior_hessian::MultivariateNormalDist< Ndim >::check_mu()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, `prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist()`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_params()`.

Here is the call graph for this function:



Here is the caller graph for this function:

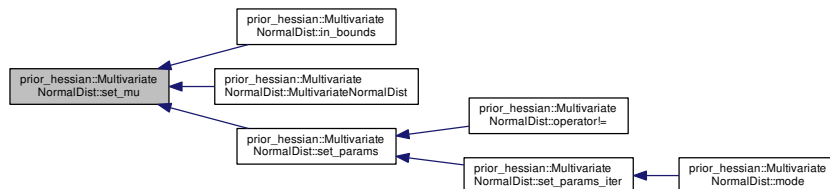




7.48.4.34 `template<IdxT Ndim> template<class Vec > void prior_hessian::MultivariateNormalDist< Ndim >::set_params ( const Vec & p )`

Definition at line 452 of file MultivariateNormalDist.h.


References `prior_hessian::MultivariateNormalDist< Ndim >::num_params()`, `prior_hessian::MultivariateNormalDist< Ndim >::set_mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_sigma()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::operator!==(())`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_params_iter()`.

Here is the call graph for this function:

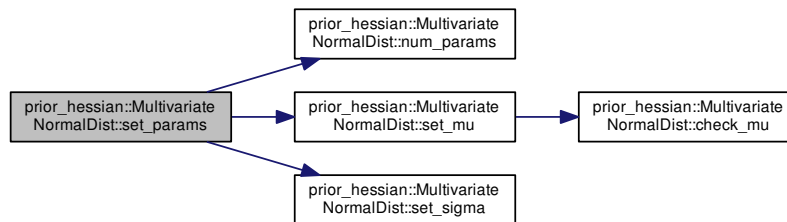

Here is the caller graph for this function:




7.48.4.35 `template<IdxT Ndim> template<class Vec , class Mat > void prior_hessian::MultivariateNormalDist< Ndim >::set_params ( Vec && mu, Mat && sigma )`

Definition at line 460 of file MultivariateNormalDist.h.

References `prior_hessian::MultivariateNormalDist< Ndim >::set_mu()`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_sigma()`.

Here is the call graph for this function:




7.48.4.36 `template<IdxT Ndim> template<class IterT > void prior_hessian::MultivariateNormalDist< Ndim >::set_params_iter ( IterT & params )`

Definition at line 468 of file `MultivariateNormalDist.h`.


References `prior_hessian::MultivariateNormalDist< Ndim >::set_params()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::mode()`.

Here is the call graph for this function:

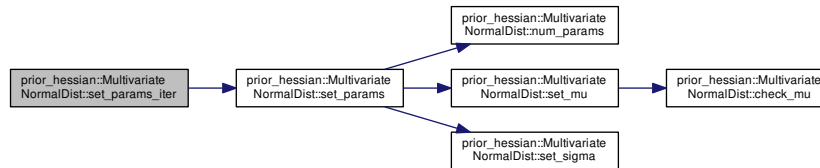

Here is the caller graph for this function:




7.48.4.37 `template<IdxT Ndim> template<class Mat > void prior_hessian::MultivariateNormalDist< Ndim >::set_sigma ( Mat && val )`

Definition at line 399 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, `prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist()`, and `prior_hessian::MultivariateNormalDist< Ndim >::set_params()`.

Here is the caller graph for this function:

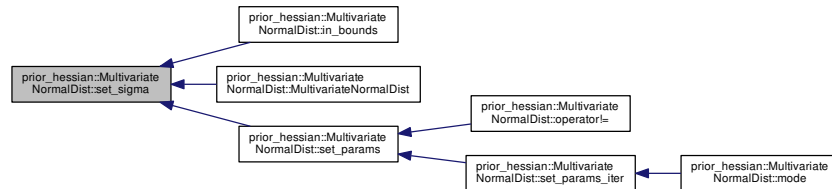


7.48.4.38 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NdimMatT & prior_hessian::MultivariateNormalDist< Ndim >::sigma ( ) const`

Definition at line 379 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::cdf()`, `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, `prior_hessian::MultivariateNormalDist< Ndim >::MultivariateNormalDist()`, `prior_hessian::MultivariateNormalDist< Ndim >::operator==()`, `prior_hessian::MultivariateNormalDist< Ndim >::params()`, and `prior_hessian::MultivariateNormalDist< Ndim >::sample()`.

Here is the caller graph for this function:

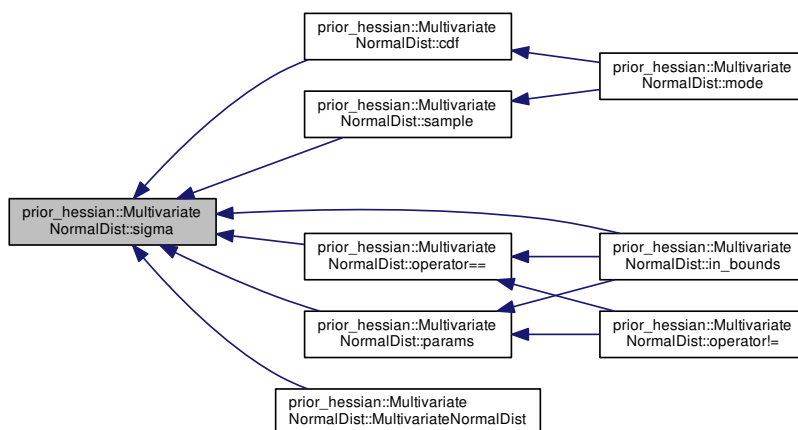


#### 7.48.4.39 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NdimMatT & prior_hessian::MultivariateNormalDist< Ndim >::sigma_inv ( ) const`

Definition at line 384 of file MultivariateNormalDist.h.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::grad()`, `prior_hessian::MultivariateNormalDist< Ndim >::grad2()`, `prior_hessian::MultivariateNormalDist< Ndim >::grad_grad2_accumulate()`, `prior_hessian::MultivariateNormalDist< Ndim >::grad_hess_accumulate()`, `prior_hessian::MultivariateNormalDist< Ndim >::hess()`, `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, and `prior_hessian::MultivariateNormalDist< Ndim >::rllh()`.

Here is the caller graph for this function:

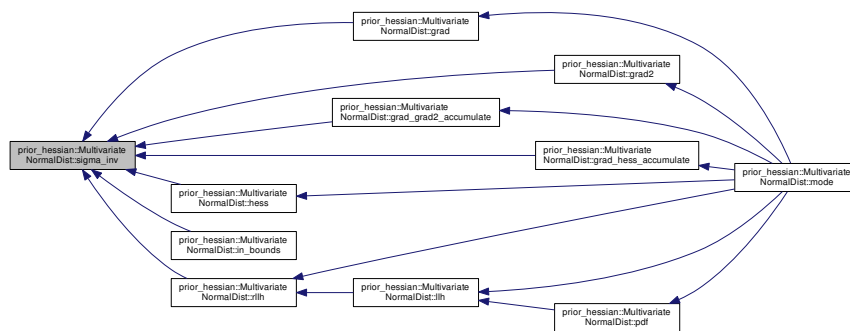


#### 7.48.4.40 `template<IdxT Ndim> const MultivariateNormalDist< Ndim >::NdimVecT & prior_hessian::MultivariateNormalDist< Ndim >::ubound ( ) [static]`

Definition at line 305 of file MultivariateNormalDist.h.


References `prior_hessian::MultivariateNormalDist< Ndim >::num_params()`.

Referenced by `prior_hessian::MultivariateNormalDist< Ndim >::in_bounds()`, and `prior_hessian::MultivariateNormalDist< Ndim >::num_dim()`.

Here is the call graph for this function:



Here is the caller graph for this function:



The documentation for this class was generated from the following file:


- [MultivariateNormalDist.h](#)

## 7.49 prior\_hessian::NormalDist Class Reference


Normal distribution with truncation.

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
NormalDist.h>
```

Inheritance diagram for prior\_hessian::NormalDist:

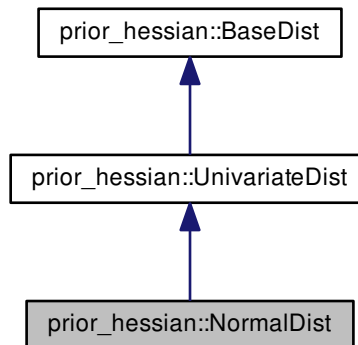

Collaboration diagram for prior\_hessian::NormalDist:

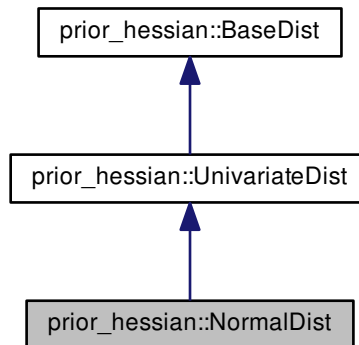

### Public Types

- using [NparamsVecT](#) = arma::Col< double >::fixed< \_num\_params >

### Public Member Functions

- [NormalDist](#) (double [mu](#), double [sigma](#))
- [NormalDist](#) ()
- template<class Vec , meta::ConstructableIfNotSelfT< Vec, NormalDist > = true>  
[NormalDist](#) (const Vec &[params](#))
- double [mu](#) () const
- double [sigma](#) () const
- void [set\\_mu](#) (double val)
- void [set\\_sigma](#) (double val)
- bool [operator==](#) (const [NormalDist](#) &o) const
- bool [operator!=](#) (const [NormalDist](#) &o) const
- double [get\\_param](#) (int idx) const
- void [set\\_param](#) (int idx, double val)
- [NparamsVecT](#) [params](#) () const
- void [set\\_params](#) (double [mu](#), double [sigma](#))
- template<class Vec >  
void [set\\_params](#) (const Vec &p)
- double [mean](#) () const
- double [median](#) () const
- double [cdf](#) (double x) const
- double [icdf](#) (double u) const
- double [pdf](#) (double x) const
- double [llh](#) (double x) const
- double [rllh](#) (double x) const

- double [grad](#) (double x) const
- double [grad2](#) (double x) const
- void [grad\\_grad2\\_accumulate](#) (double x, double &g, double &g2) const
- template<class RngT >  
double [sample](#) (RngT &rng) const
- template<class IterT >  
void [append\\_params\\_iter](#) (IterT &params) const
- template<class IterT >  
void [set\\_params\\_iter](#) (IterT &params)

### Static Public Member Functions

- static constexpr [IdxT num\\_params](#) ()
- static constexpr double [lbound](#) ()
- static constexpr double [ubound](#) ()
- static bool [in\\_bounds](#) (double u)
- static const [StringVecT](#) & [param\\_names](#) ()
- static const [NparamsVecT](#) & [param\\_lbound](#) ()
- static const [NparamsVecT](#) & [param\\_ubound](#) ()
- static bool [check\\_params](#) (double mu, double sigma)
- template<class Vec >  
static bool [check\\_params](#) (const Vec &p)
- template<class IterT >  
static bool [check\\_params\\_iter](#) (IterT &params)
- static constexpr [IdxT num\\_dim](#) ()

### Static Protected Member Functions

- static void [check\\_bounds](#) (double lbound, double ubound)

#### 7.49.1 Detailed Description

Normal distribution with truncation.

Definition at line 21 of file NormalDist.h.

#### 7.49.2 Member Typedef Documentation

7.49.2.1 `using prior_hessian::NormalDist::NparamsVecT = arma::Col<double>::fixed<_num_params>`

Definition at line 25 of file NormalDist.h.


## 7.49.3 Constructor &amp; Destructor Documentation

7.49.3.1 prior\_hessian::NormalDist::NormalDist ( double *mu*, double *sigma* )

Definition at line 27 of file NormalDist.cpp.

References `set_params()`.

Here is the call graph for this function:




## 7.49.3.2 prior\_hessian::NormalDist::NormalDist ( ) [inline]

Definition at line 43 of file NormalDist.h.

Referenced by `check_params()`.

Here is the caller graph for this function:

7.49.3.3 `template<class Vec , meta::ConstructableIfNotSelfT< Vec, NormalDist > = true> prior_hessian::NormalDist::NormalDist ( const Vec & params ) [inline], [explicit]`

Definition at line 45 of file NormalDist.h.



## 7.49.4 Member Function Documentation


7.49.4.1 `template<class IterT > void prior_hessian::NormalDist::append_params_iter ( IterT & params ) const`

Definition at line 205 of file NormalDist.h.

References `mu()`, and `sigma()`.

Referenced by `median()`.

Here is the call graph for this function:

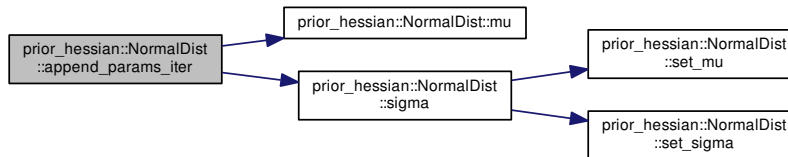

Here is the caller graph for this function:


7.49.4.2 `double prior_hessian::NormalDist::cdf ( double x ) const`

Definition at line 42 of file NormalDist.cpp.

References `prior_hessian::constants::sqrt2_inv`.

Referenced by `median()`.

Here is the caller graph for this function:




7.49.4.3 `void prior_hessian::UnivariateDist::check_bounds ( double lbound, double ubound )` `[static]`, `[protected]`, `[inherited]`

Definition at line 17 of file UnivariateDist.cpp.

Referenced by `prior_hessian::UnivariateDist::UnivariateDist()`.

Here is the caller graph for this function:




7.49.4.4 `bool prior_hessian::NormalDist::check_params ( double mu, double sigma )` `[inline]`, `[static]`

Definition at line 121 of file NormalDist.h.

Referenced by `check_params_iter()`, and `param_ubound()`.

Here is the caller graph for this function:




7.49.4.5 `template<class Vec > static bool prior_hessian::NormalDist::check_params ( const Vec & p )` `[inline]`, `[static]`

Definition at line 39 of file NormalDist.h.


References `check_params()`, and `NormalDist()`.

Referenced by `check_params()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.49.4.6 `template<class IterT > bool prior_hessian::NormalDist::check_params_iter ( IterT & params ) [static]`

Definition at line 197 of file NormalDist.h.

References `check_params()`, `mu()`, and `sigma()`.

Referenced by `median()`.

Here is the call graph for this function:

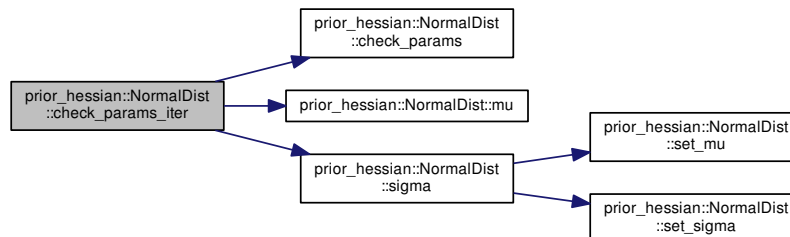

Here is the caller graph for this function:




#### 7.49.4.7 double prior\_hessian::NormalDist::get\_param ( int *idx* ) const [inline]

Definition at line 127 of file NormalDist.h.

References `mu()`, and `sigma()`.

Referenced by `operator!=(())`.

Here is the call graph for this function:

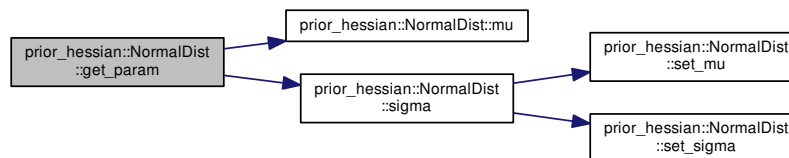

Here is the caller graph for this function:



#### 7.49.4.8 `double prior_hessian::NormalDist::grad ( double x ) const [inline]`

Definition at line 168 of file NormalDist.h.

References `prior_hessian::square()`.

Referenced by `median()`.

Here is the call graph for this function:



Here is the caller graph for this function:



#### 7.49.4.9 `double prior_hessian::NormalDist::grad2 ( double x ) const [inline]`

Definition at line 174 of file NormalDist.h.

References `prior_hessian::square()`.

Referenced by `median()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.49.4.10 `void prior_hessian::NormalDist::grad_grad2_accumulate ( double x, double & g, double & g2 ) const [inline]`

Definition at line 180 of file NormalDist.h.

References `prior_hessian::square()`.

Referenced by `median()`.

Here is the call graph for this function:



Here is the caller graph for this function:




#### 7.49.4.11 `double prior_hessian::NormalDist::icdf ( double u ) const`

Definition at line 47 of file NormalDist.cpp.

References `mu()`, `sigma()`, and `prior_hessian::constants::sqrt2`.

Referenced by `median()`.

Here is the call graph for this function:

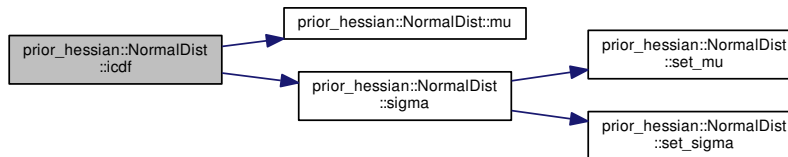

Here is the caller graph for this function:




#### 7.49.4.12 `static bool prior_hessian::NormalDist::in_bounds ( double u ) [inline],[static]`

Definition at line 31 of file NormalDist.h.

References `lbound()`, and `ubound()`.

Here is the call graph for this function:

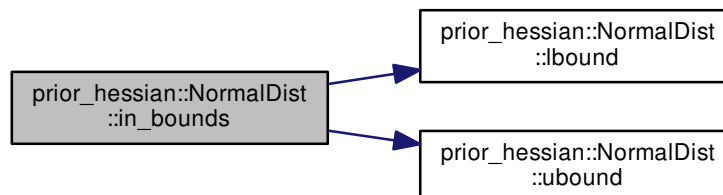

7.49.4.13 `static constexpr double prior_hessian::NormalDist::lbound ( ) [inline],[static]`

Definition at line 29 of file NormalDist.h.

Referenced by `in_bounds()`.

Here is the caller graph for this function:




7.49.4.14 `double prior_hessian::NormalDist::llh ( double x ) const`

Definition at line 72 of file NormalDist.cpp.


References `prior_hessian::constants::log2pi`, `rllh()`, and `sigma()`.

Referenced by `median()`.

Here is the call graph for this function:

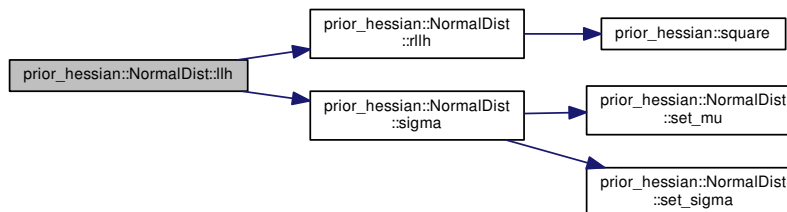

Here is the caller graph for this function:






#### 7.49.4.15 `double prior_hessian::NormalDist::mean ( ) const [inline]`

Definition at line 62 of file NormalDist.h.

References `mu()`.

Here is the call graph for this function:




#### 7.49.4.16 `double prior_hessian::NormalDist::median ( ) const [inline]`

Definition at line 63 of file NormalDist.h.

References `append_params_iter()`, `cdf()`, `check_params_iter()`, `grad()`, `grad2()`, `grad_grad2_accumulate()`, `icdf()`, `llh()`, `mu()`, `params()`, `pdf()`, `rlh()`, `sample()`, and `set_params_iter()`.

Here is the call graph for this function:

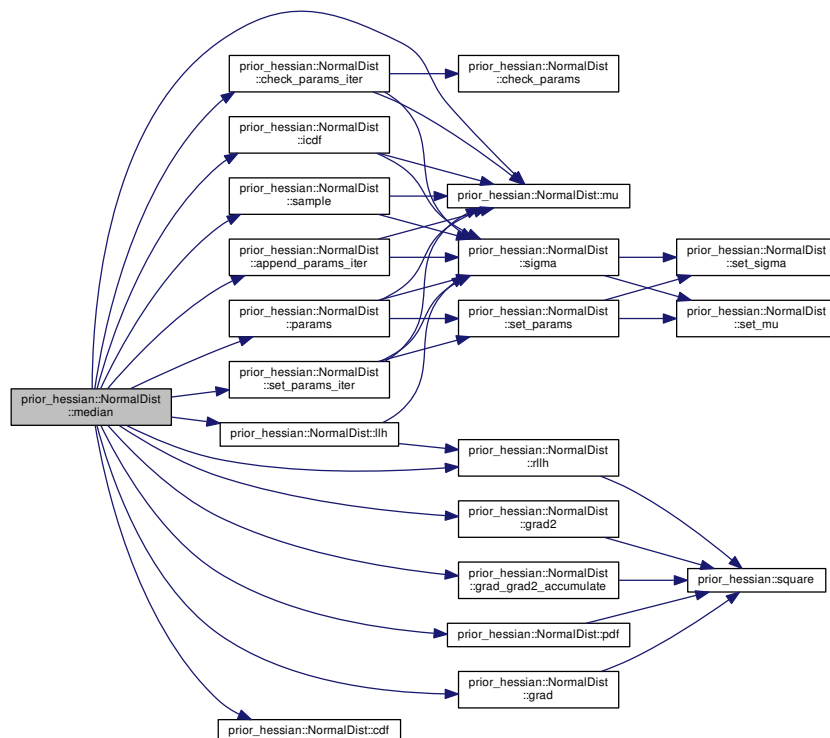


## 7.49.4.17 double prior\_hessian::NormalDist::mu ( ) const [inline]

Definition at line 48 of file NormalDist.h.

Referenced by `append_params_iter()`, `check_params_iter()`, `get_param()`, `icdf()`, `mean()`, `median()`, `operator==()`, `param_ubound()`, `params()`, `sample()`, and `set_params_iter()`.

Here is the caller graph for this function:

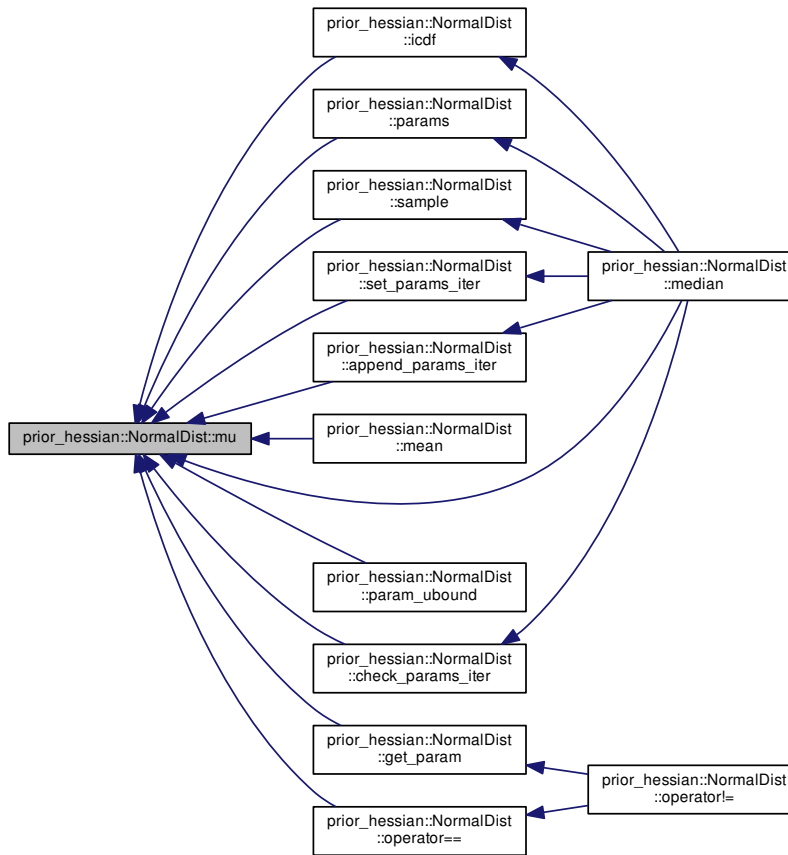

## 7.49.4.18 static constexpr IdxT prior\_hessian::UnivariateDist::num\_dim ( ) [inline],[static],[inherited]

Definition at line 17 of file UnivariateDist.h.

## 7.49.4.19 static constexpr IdxT prior\_hessian::NormalDist::num\_params ( ) [inline],[static]


Definition at line 28 of file NormalDist.h.

#### 7.49.4.20 `bool prior_hessian::NormalDist::operator!=( const NormalDist & o ) const [inline]`

Definition at line 53 of file NormalDist.h.

References `get_param()`, `operator==( )`, and `set_param()`.

Here is the call graph for this function:

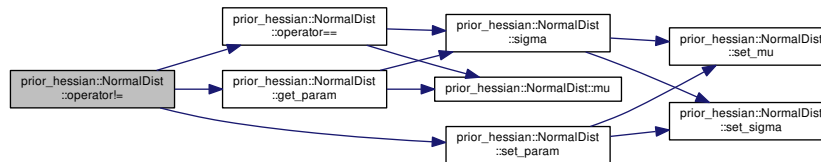


#### 7.49.4.21 `bool prior_hessian::NormalDist::operator==( const NormalDist & o ) const [inline]`

Definition at line 52 of file NormalDist.h.

References `mu()`, and `sigma()`.

Referenced by `operator!=( )`.

Here is the call graph for this function:

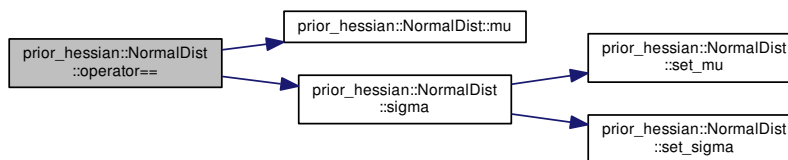

Here is the caller graph for this function:



7.49.4.22 `static const NparamsVecT& prior_hessian::NormalDist::param_lbound ( ) [inline],[static]`

Definition at line 34 of file NormalDist.h.

7.49.4.23 `static const StringVecT& prior_hessian::NormalDist::param_names ( ) [inline],[static]`


Definition at line 33 of file NormalDist.h.

7.49.4.24 `static const NparamsVecT& prior_hessian::NormalDist::param_ubound ( ) [inline],[static]`

Definition at line 35 of file NormalDist.h.

References `check_params()`, `mu()`, and `sigma()`.

Here is the call graph for this function:

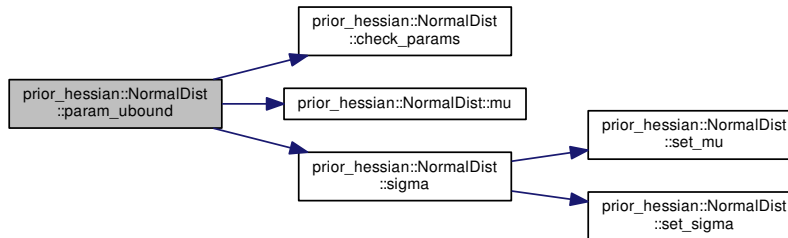


7.49.4.25 `NparamsVecT prior_hessian::NormalDist::params ( ) const [inline]`

Definition at line 57 of file NormalDist.h.

References `mu()`, `set_params()`, and `sigma()`.

Referenced by `median()`.

Here is the call graph for this function:

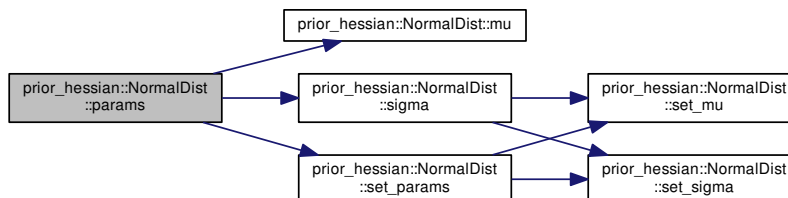

Here is the caller graph for this function:



7.49.4.26 `double prior_hessian::NormalDist::pdf ( double x ) const [inline]`

Definition at line 156 of file NormalDist.h.


References `prior_hessian::constants::sqrt2pi_inv`, and `prior_hessian::square()`.

Referenced by `median()`.

Here is the call graph for this function:



Here is the caller graph for this function:



## 7.49.4.27 double prior\_hessian::NormalDist::rllh ( double x ) const [inline]

Definition at line 162 of file NormalDist.h.


References prior\_hessian::square().

Referenced by llh(), and median().

Here is the call graph for this function:



Here is the caller graph for this function:




## 7.49.4.28 template&lt;class RngT &gt; double prior\_hessian::NormalDist::sample ( RngT &amp; rng ) const

Definition at line 188 of file NormalDist.h.

References mu(), and sigma().

Referenced by median().

Here is the call graph for this function:

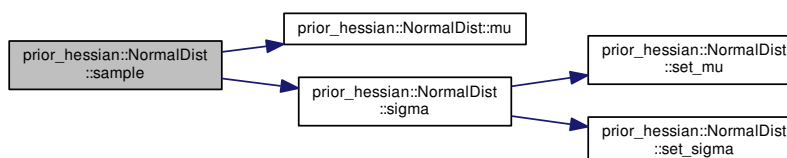

Here is the caller graph for this function:




7.49.4.29 `void prior_hessian::NormalDist::set_mu ( double val ) [inline]`

Definition at line 110 of file NormalDist.h.

Referenced by `set_param()`, `set_params()`, and `sigma()`.

Here is the caller graph for this function:

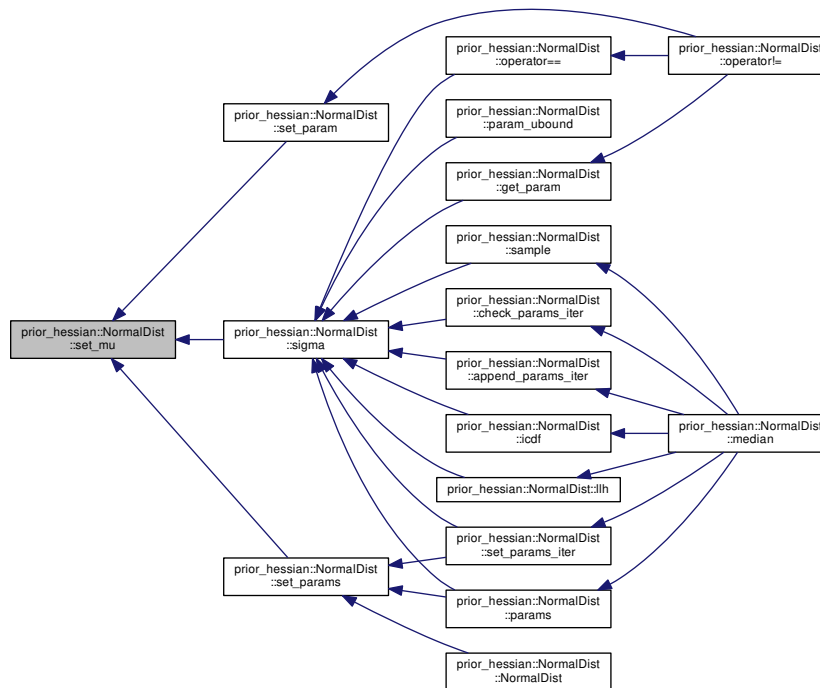


7.49.4.30 void prior\_hessian::NormalDist::set\_param ( int *idx*, double *val* ) [inline]

Definition at line 141 of file NormalDist.h.

References set\_mu(), and set\_sigma().

Referenced by operator!=(()).

Here is the call graph for this function:

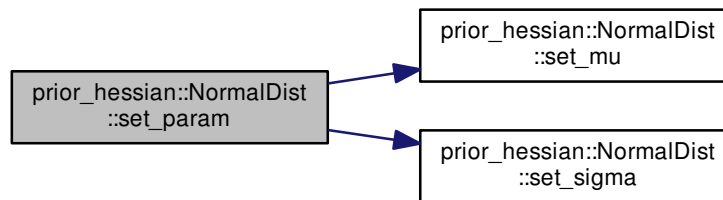

Here is the caller graph for this function:

7.49.4.31 void prior\_hessian::NormalDist::set\_params ( double *mu*, double *sigma* ) [inline]


Definition at line 114 of file NormalDist.h.

References set\_mu(), and set\_sigma().


Referenced by NormalDist(), params(), and set\_params\_iter().



Here is the call graph for this function:

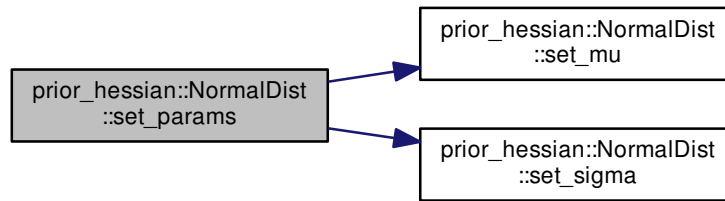

Here is the caller graph for this function:

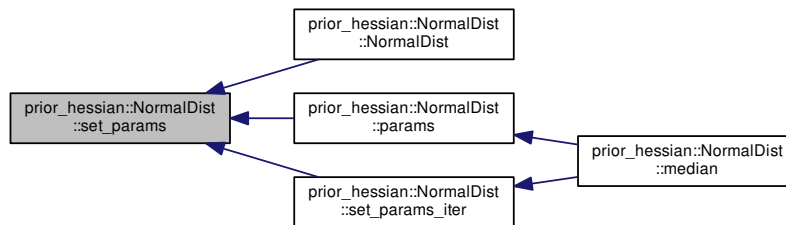


**7.49.4.32** `template<class Vec > void prior_hessian::NormalDist::set_params ( const Vec & p ) [inline]`

Definition at line 60 of file NormalDist.h.


References `set_params()`.

Referenced by `set_params()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.49.4.33 `template<class IterT > void prior_hessian::NormalDist::set_params_iter ( IterT & params )`

Definition at line 213 of file NormalDist.h.

References `mu()`, `set_params()`, and `sigma()`.

Referenced by `median()`.

Here is the call graph for this function:

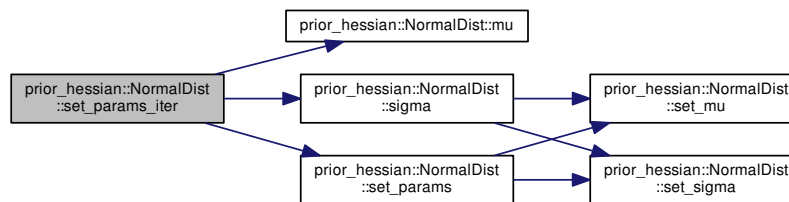

Here is the caller graph for this function:




#### 7.49.4.34 void prior\_hessian::NormalDist::set\_sigma ( double val )

Definition at line 35 of file NormalDist.cpp.

Referenced by set\_param(), set\_params(), and sigma().

Here is the caller graph for this function:

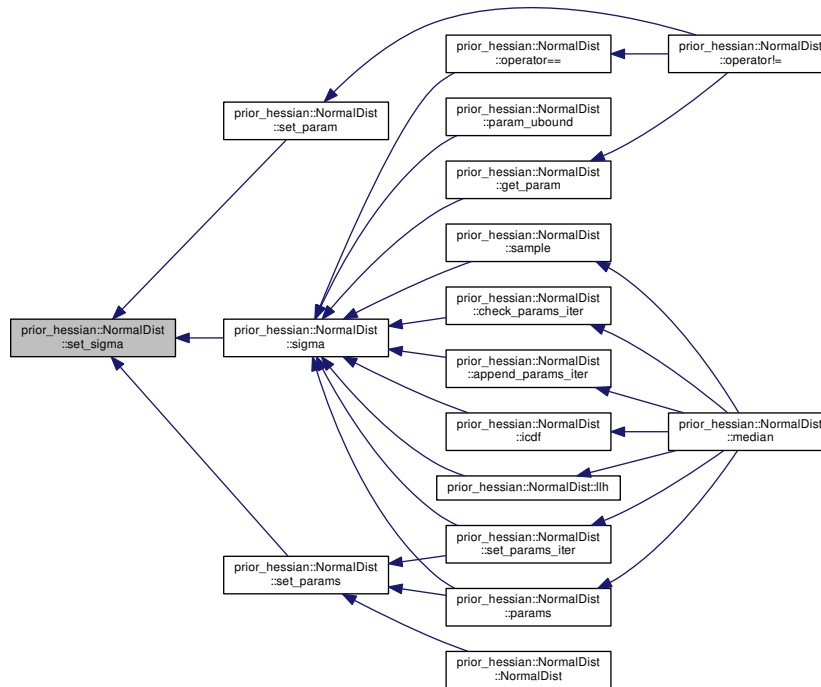


#### 7.49.4.35 double prior\_hessian::NormalDist::sigma ( ) const [inline]

Definition at line 49 of file NormalDist.h.


References set\_mu(), and set\_sigma().

Referenced by append\_params\_iter(), check\_params\_iter(), get\_param(), icdf(), llh(), operator==(), param\_ubound(), params(), sample(), and set\_params\_iter().

Here is the call graph for this function:

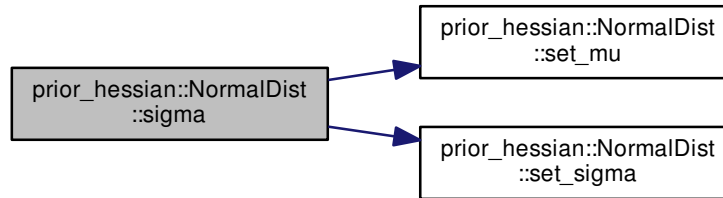

Here is the caller graph for this function:

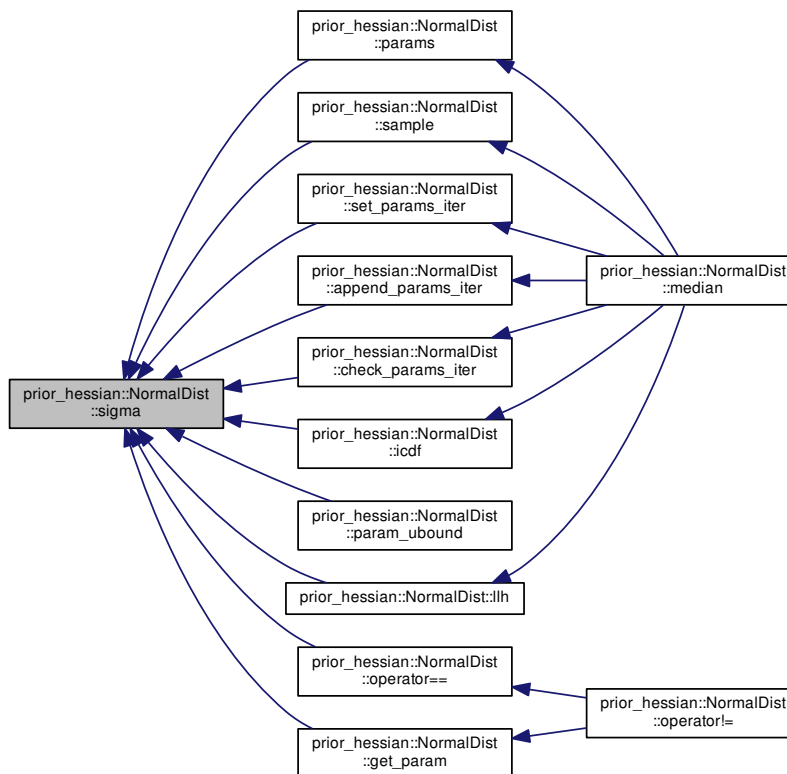

7.49.4.36 `static constexpr double prior_hessian::NormalDist::ubound ( ) [inline], [static]`

Definition at line 30 of file `NormalDist.h`.

Referenced by `in_bounds()`.

Here is the caller graph for this function:




The documentation for this class was generated from the following files:

- [NormalDist.h](#)
- [NormalDist.cpp](#)


## 7.50 prior\_hessian::NotImplementedError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
PriorHessianError.h>
```

Inheritance diagram for `prior_hessian::NotImplementedError`:

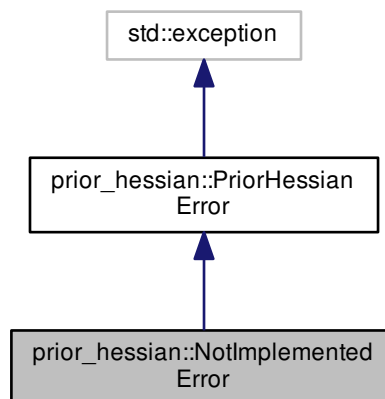

Collaboration diagram for prior\_hessian::NotImplementedError:

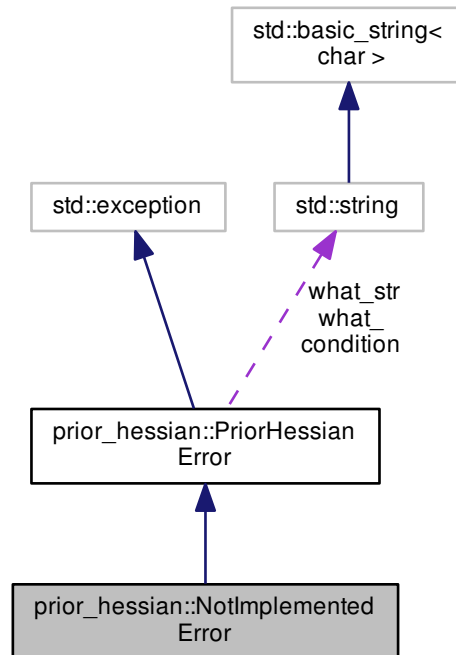

#### Public Member Functions

- `NotImplementedError` (`std::string` message)
- `const char * what () const noexcept override`

#### Protected Attributes

- `std::string condition`
- `std::string what_str`
- `std::string what_`

#### 7.50.1 Detailed Description

Definition at line 114 of file `PriorHessianError.h`.

#### 7.50.2 Constructor & Destructor Documentation

7.50.2.1 `prior_hessian::NotImplementedError::NotImplementedError ( std::string message ) [inline]`

Definition at line 116 of file `PriorHessianError.h`.

### 7.50.3 Member Function Documentation

7.50.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` [inline],[override],[noexcept],[inherited]

Definition at line 56 of file PriorHessianError.h.

### 7.50.4 Member Data Documentation

7.50.4.1 `std::string prior_hessian::PriorHessianError::condition` [protected],[inherited]

Definition at line 46 of file PriorHessianError.h.

7.50.4.2 `std::string prior_hessian::PriorHessianError::what_` [protected],[inherited]

Definition at line 48 of file PriorHessianError.h.

7.50.4.3 `std::string prior_hessian::PriorHessianError::what_str` [protected],[inherited]

Definition at line 47 of file PriorHessianError.h.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.51 prior\_hessian::NumericalOverflowError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::NumericalOverflowError:

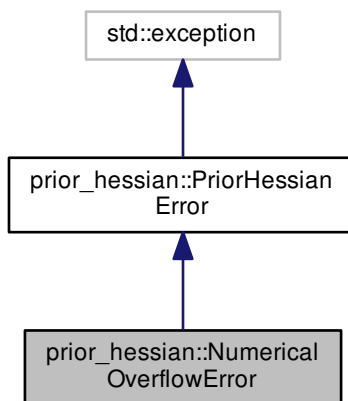

Collaboration diagram for prior\_hessian::NumericalOverflowError:

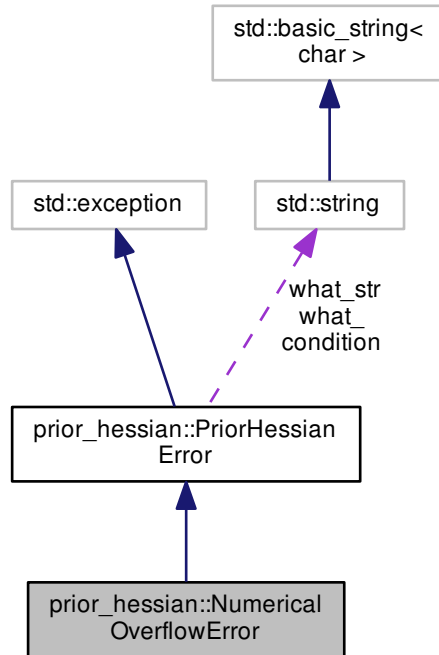

#### Public Member Functions

- [NumericalOverflowError](#) (std::string message)
- const char \* [what](#) () const noexcept override

#### Protected Attributes

- std::string [condition](#)
- std::string [what\\_str](#)
- std::string [what\\_](#)

#### 7.51.1 Detailed Description

Definition at line 109 of file PriorHessianError.h.

#### 7.51.2 Constructor & Destructor Documentation

7.51.2.1 `prior_hessian::NumericalOverflowError::NumericalOverflowError ( std::string message )` `[inline]`

Definition at line 111 of file PriorHessianError.h.



### 7.51.3 Member Function Documentation

7.51.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` [inline],[override],[noexcept],[inherited]

Definition at line 56 of file PriorHessianError.h.

### 7.51.4 Member Data Documentation

7.51.4.1 `std::string prior_hessian::PriorHessianError::condition` [protected],[inherited]

Definition at line 46 of file PriorHessianError.h.

7.51.4.2 `std::string prior_hessian::PriorHessianError::what_` [protected],[inherited]

Definition at line 48 of file PriorHessianError.h.

7.51.4.3 `std::string prior_hessian::PriorHessianError::what_str` [protected],[inherited]

Definition at line 47 of file PriorHessianError.h.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.52 prior\_hessian::ParameterNameError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::ParameterNameError:

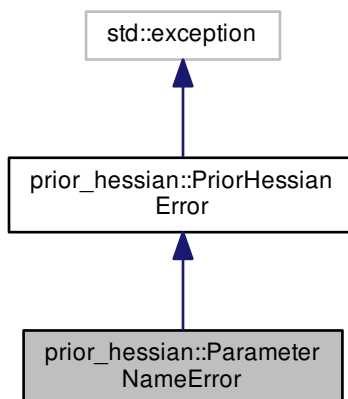

Collaboration diagram for prior\_hessian::ParameterNameError:

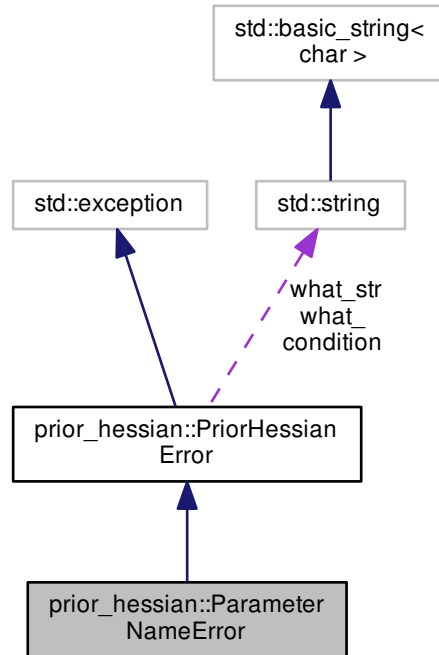

#### Public Member Functions

- [ParameterNameError](#) (std::string message)
- `const char * what () const noexcept override`

#### Protected Attributes

- std::string `condition`
- std::string `what_str`
- std::string `what_`

#### 7.52.1 Detailed Description

Definition at line 85 of file `PriorHessianError.h`.

#### 7.52.2 Constructor & Destructor Documentation

##### 7.52.2.1 `prior_hessian::ParameterNameError::ParameterNameError ( std::string message ) [inline]`

Definition at line 87 of file `PriorHessianError.h`.

### 7.52.3 Member Function Documentation

#### 7.52.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` `[inline]`, `[override]`, `[noexcept]`, `[inherited]`

Definition at line 56 of file `PriorHessianError.h`.

### 7.52.4 Member Data Documentation

#### 7.52.4.1 `std::string prior_hessian::PriorHessianError::condition` `[protected]`, `[inherited]`

Definition at line 46 of file `PriorHessianError.h`.

#### 7.52.4.2 `std::string prior_hessian::PriorHessianError::what_` `[protected]`, `[inherited]`

Definition at line 48 of file `PriorHessianError.h`.

#### 7.52.4.3 `std::string prior_hessian::PriorHessianError::what_str` `[protected]`, `[inherited]`

Definition at line 47 of file `PriorHessianError.h`.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.53 `prior_hessian::ParameterNameUniquenessError` Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for `prior_hessian::ParameterNameUniquenessError`:

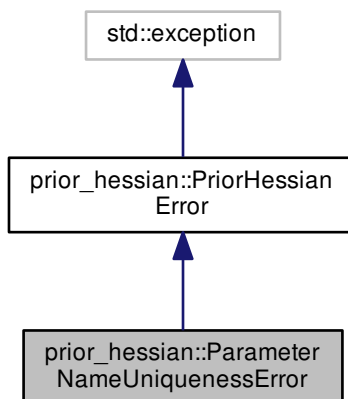

Collaboration diagram for prior\_hessian::ParameterNameUniquenessError:

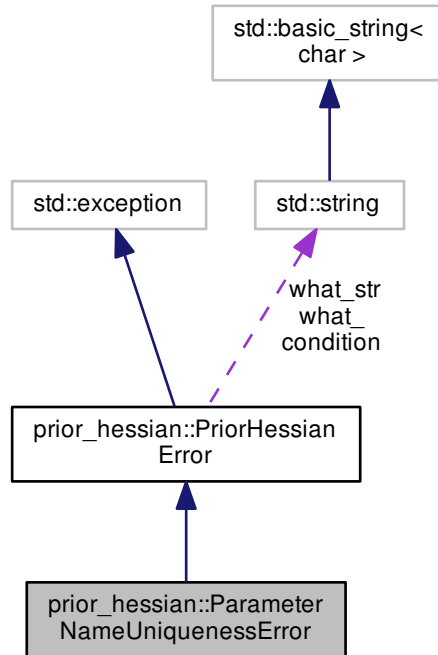

#### Public Member Functions

- [ParameterNameUniquenessError](#) (std::string message)
- const char \* [what](#) () const noexcept override

#### Protected Attributes

- std::string [condition](#)
- std::string [what\\_str](#)
- std::string [what\\_](#)

#### 7.53.1 Detailed Description

Definition at line 89 of file PriorHessianError.h.

#### 7.53.2 Constructor & Destructor Documentation

7.53.2.1 `prior_hessian::ParameterNameUniquenessError::ParameterNameUniquenessError ( std::string message ) [inline]`

Definition at line 91 of file PriorHessianError.h.

### 7.53.3 Member Function Documentation

7.53.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` `[inline]`, `[override]`, `[noexcept]`, `[inherited]`

Definition at line 56 of file `PriorHessianError.h`.

### 7.53.4 Member Data Documentation

7.53.4.1 `std::string prior_hessian::PriorHessianError::condition` `[protected]`, `[inherited]`

Definition at line 46 of file `PriorHessianError.h`.

7.53.4.2 `std::string prior_hessian::PriorHessianError::what_` `[protected]`, `[inherited]`

Definition at line 48 of file `PriorHessianError.h`.

7.53.4.3 `std::string prior_hessian::PriorHessianError::what_str` `[protected]`, `[inherited]`

Definition at line 47 of file `PriorHessianError.h`.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.54 `prior_hessian::ParameterSizeError` Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
PriorHessianError.h>
```

Inheritance diagram for `prior_hessian::ParameterSizeError`:

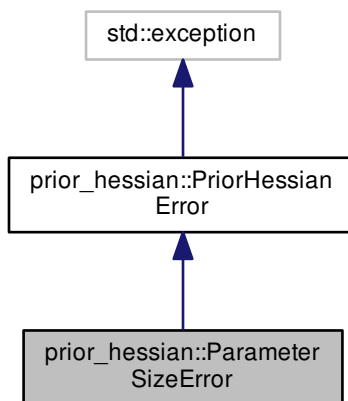

Collaboration diagram for prior\_hessian::ParameterSizeError:

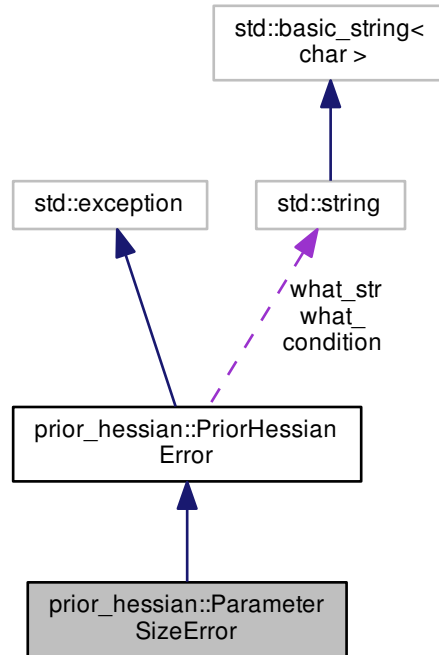

#### Public Member Functions

- [ParameterSizeError](#) (std::string message)
- const char \* [what](#) () const noexcept override

#### Protected Attributes

- std::string [condition](#)
- std::string [what\\_str](#)
- std::string [what\\_](#)

#### 7.54.1 Detailed Description

Definition at line 75 of file PriorHessianError.h.

#### 7.54.2 Constructor & Destructor Documentation

7.54.2.1 `prior_hessian::ParameterSizeError::ParameterSizeError ( std::string message )` [inline]

Definition at line 77 of file PriorHessianError.h.

### 7.54.3 Member Function Documentation

7.54.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` [inline],[override],[noexcept],[inherited]

Definition at line 56 of file PriorHessianError.h.

### 7.54.4 Member Data Documentation

7.54.4.1 `std::string prior_hessian::PriorHessianError::condition` [protected],[inherited]

Definition at line 46 of file PriorHessianError.h.

7.54.4.2 `std::string prior_hessian::PriorHessianError::what_` [protected],[inherited]

Definition at line 48 of file PriorHessianError.h.

7.54.4.3 `std::string prior_hessian::PriorHessianError::what_str` [protected],[inherited]

Definition at line 47 of file PriorHessianError.h.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.55 prior\_hessian::ParameterValueError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::ParameterValueError:

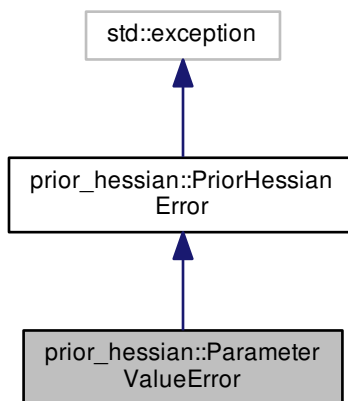

Collaboration diagram for prior\_hessian::ParameterValueError:

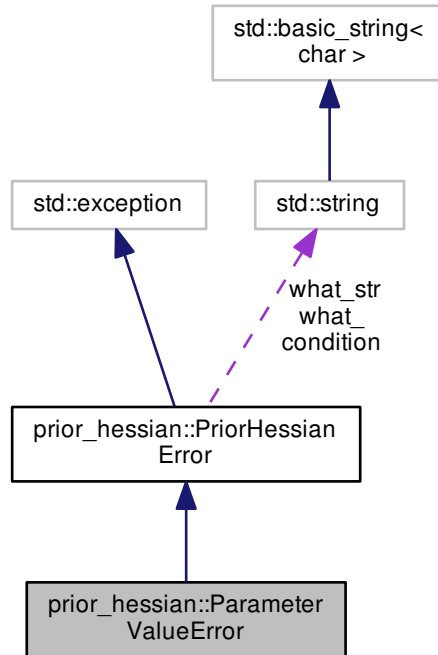

#### Public Member Functions

- [ParameterValueError](#) (std::string message)
- const char \* [what](#) () const noexcept override

#### Protected Attributes

- std::string [condition](#)
- std::string [what\\_str](#)
- std::string [what\\_](#)

#### 7.55.1 Detailed Description

Definition at line 80 of file `PriorHessianError.h`.

#### 7.55.2 Constructor & Destructor Documentation

7.55.2.1 `prior_hessian::ParameterValueError::ParameterValueError ( std::string message )` [inline]

Definition at line 82 of file `PriorHessianError.h`.



### 7.55.3 Member Function Documentation

7.55.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` `[inline]`, `[override]`, `[noexcept]`, `[inherited]`

Definition at line 56 of file `PriorHessianError.h`.

### 7.55.4 Member Data Documentation

7.55.4.1 `std::string prior_hessian::PriorHessianError::condition` `[protected]`, `[inherited]`

Definition at line 46 of file `PriorHessianError.h`.

7.55.4.2 `std::string prior_hessian::PriorHessianError::what_` `[protected]`, `[inherited]`

Definition at line 48 of file `PriorHessianError.h`.

7.55.4.3 `std::string prior_hessian::PriorHessianError::what_str` `[protected]`, `[inherited]`

Definition at line 47 of file `PriorHessianError.h`.

The documentation for this struct was generated from the following file:


- [PriorHessianError.h](#)

## 7.56 prior\_hessian::ParetoDist Class Reference


Pareto dist with infinite upper bound.

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↔
ParetoDist.h>
```

Inheritance diagram for `prior_hessian::ParetoDist`:

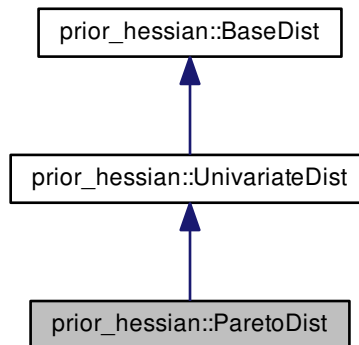

Collaboration diagram for prior\_hessian::ParetoDist:

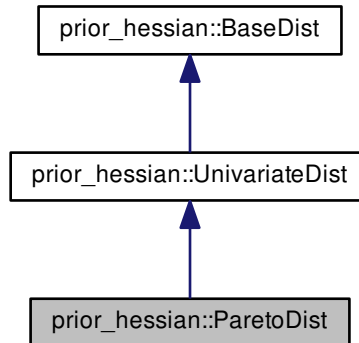

### Public Types

- using [NparamsVecT](#) = arma::Col< double >::fixed< \_num\_params >

### Public Member Functions

- bool [in\\_bounds](#) (double u) const
- [ParetoDist](#) ()
- [ParetoDist](#) (double [min](#), double [alpha](#))
- template<class Vec , meta::ConstructableIfNotSelfT< Vec, ParetoDist > = true>  
[ParetoDist](#) (const Vec &[params](#))
- double [get\\_param](#) (int idx) const
- void [set\\_param](#) (int idx, double val)
- [NparamsVecT](#) [params](#) () const
- void [set\\_params](#) (double [min](#), double [alpha](#))
- template<class Vec >  
void [set\\_params](#) (const Vec &p)
- bool [operator==](#) (const [ParetoDist](#) &o) const
- bool [operator!=](#) (const [ParetoDist](#) &o) const
- double [alpha](#) () const
- double [min](#) () const
- void [set\\_min](#) (double val)
- void [set\\_alpha](#) (double val)
- double [lbound](#) () const
- void [set\\_lbound](#) (double [lbound](#))
- double [mean](#) () const
- double [median](#) () const
- double [cdf](#) (double x) const
- double [icdf](#) (double u) const

- double [pdf](#) (double x) const
- double [llh](#) (double x) const
- double [rllh](#) (double x) const
- double [grad](#) (double x) const
- double [grad2](#) (double x) const
- void [grad\\_grad2\\_accumulate](#) (double x, double &g, double &g2) const
- template<class RngT >  
double [sample](#) (RngT &rng) const
- template<class IterT >  
void [set\\_params\\_iter](#) (IterT &params)

### Static Public Member Functions

- static constexpr [IdxT num\\_params](#) ()
- static constexpr double [global\\_lbound](#) ()
- static constexpr double [ubound](#) ()
- static const [StringVecT & param\\_names](#) ()
- static const [NparamsVecT & param\\_lbound](#) ()
- static const [NparamsVecT & param\\_ubound](#) ()
- static bool [check\\_params](#) (double min, double alpha)
- template<class Vec >  
static bool [check\\_params](#) (const Vec &params)
- static bool [check\\_lbound](#) (double min)
- template<class IterT >  
static bool [check\\_params\\_iter](#) (IterT &params)
- static constexpr [IdxT num\\_dim](#) ()

### Static Protected Member Functions

- static void [check\\_bounds](#) (double lbound, double ubound)

#### 7.56.1 Detailed Description

Pareto dist with infinite upper bound.

Definition at line 20 of file ParetoDist.h.

#### 7.56.2 Member Typedef Documentation

7.56.2.1 `using prior_hessian::ParetoDist::NparamsVecT = arma::Col<double>::fixed<_num_params>`

Definition at line 24 of file ParetoDist.h.

## 7.56.3 Constructor &amp; Destructor Documentation

## 7.56.3.1 prior\_hessian::ParetoDist::ParetoDist ( ) [inline]

Definition at line 41 of file ParetoDist.h.

7.56.3.2 prior\_hessian::ParetoDist::ParetoDist ( double *min*, double *alpha* )


Definition at line 21 of file ParetoDist.cpp.

7.56.3.3 template<class Vec , meta::ConstructableIfNotSelfT< Vec, ParetoDist > = true> prior\_hessian::ParetoDist::ParetoDist ( const Vec & *params* ) [inline], [explicit]

Definition at line 44 of file ParetoDist.h.

References `get_param()`, and `set_param()`.

Here is the call graph for this function:

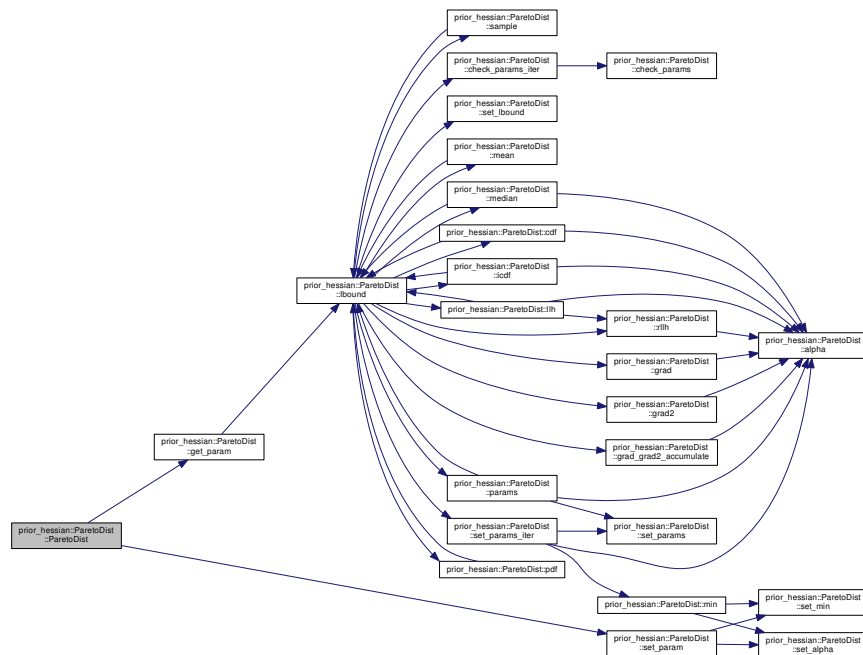


## 7.56.4 Member Function Documentation

## 7.56.4.1 double prior\_hessian::ParetoDist::alpha ( ) const [inline]

Definition at line 55 of file ParetoDist.h.

Referenced by `cdf()`, `grad()`, `grad2()`, `grad_grad2_accumulate()`, `icdf()`, `llh()`, `median()`, `operator==()`, `param_ubound()`, `params()`, `rllh()`, and `set_params_iter()`.

Here is the caller graph for this function:

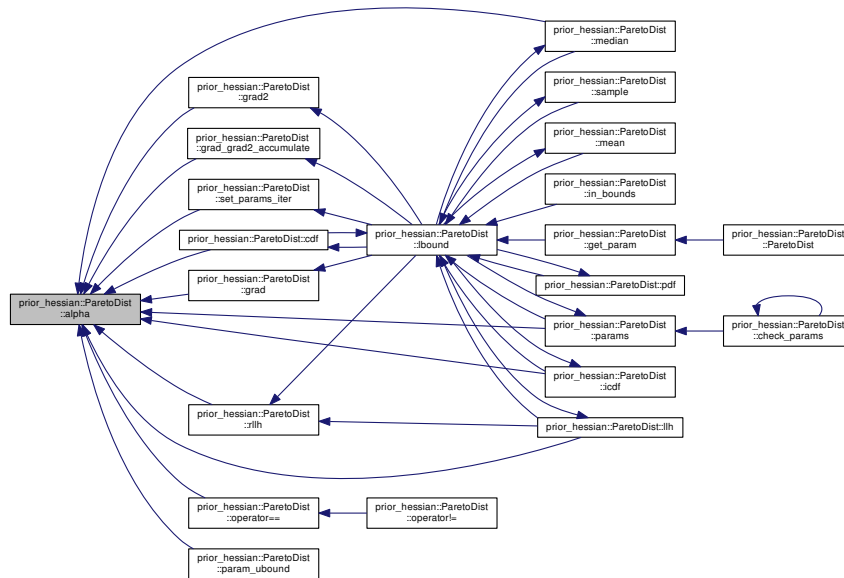


#### 7.56.4.2 `double prior_hessian::ParetoDist::cdf ( double x ) const [inline]`

Definition at line 155 of file `ParetoDist.h`.


References `alpha()`, and `lbound()`.

Referenced by `lbound()`.

Here is the call graph for this function:

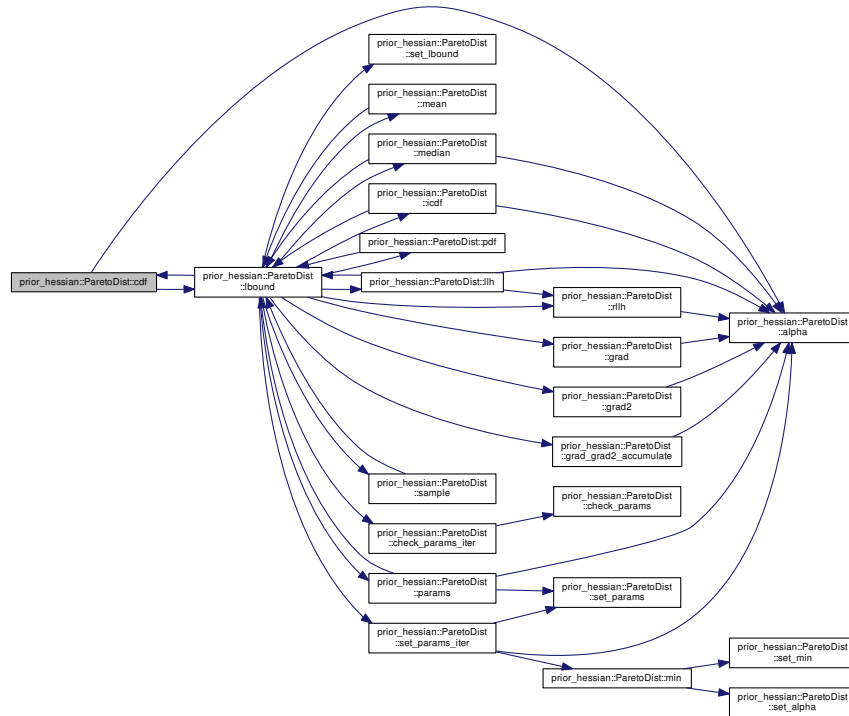

Here is the caller graph for this function:

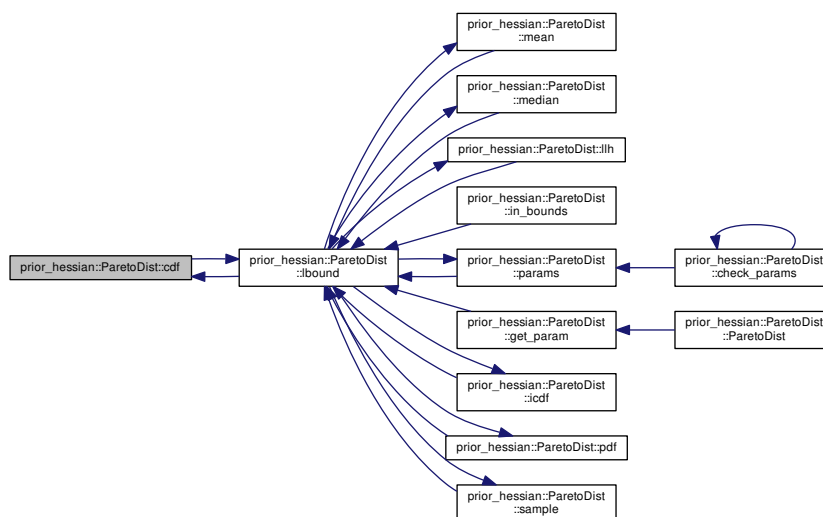

7.56.4.3 `void prior_hessian::UnivariateDist::check_bounds ( double lbound, double ubound )` `[static]`, `[protected]`, `[inherited]`

Definition at line 17 of file UnivariateDist.cpp.

Referenced by `prior_hessian::UnivariateDist::UnivariateDist()`.

Here is the caller graph for this function:




7.56.4.4 `bool prior_hessian::ParetoDist::check_lbound ( double min )` `[inline]`, `[static]`

Definition at line 149 of file ParetoDist.h.

Referenced by `check_params()`.

Here is the caller graph for this function:




7.56.4.5 `bool prior_hessian::ParetoDist::check_params ( double min, double alpha )` `[inline]`, `[static]`

Definition at line 104 of file ParetoDist.h.

Referenced by `check_params_iter()`, and `param_ubound()`.

Here is the caller graph for this function:

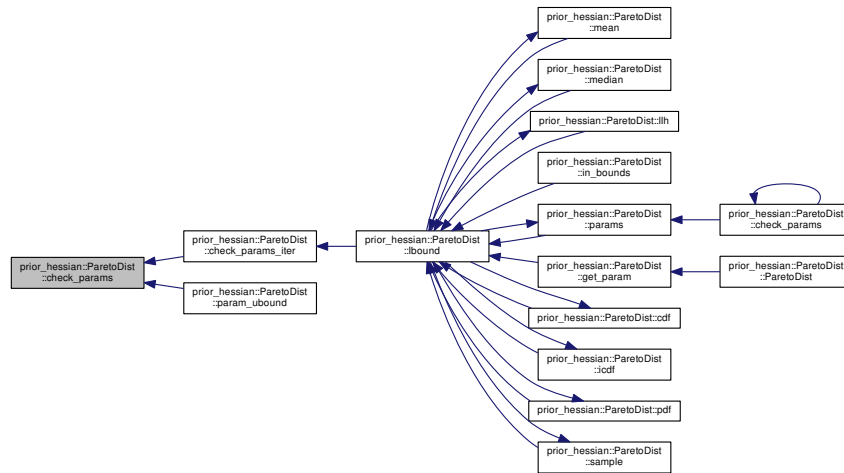


7.56.4.6 `template<class Vec > static bool prior_hessian::ParetoDist::check_params ( const Vec & params ) [inline], [static]`

Definition at line 38 of file ParetoDist.h.

References `check_lbound()`, `check_params()`, and `params()`.


Referenced by `check_params()`.

Here is the call graph for this function:

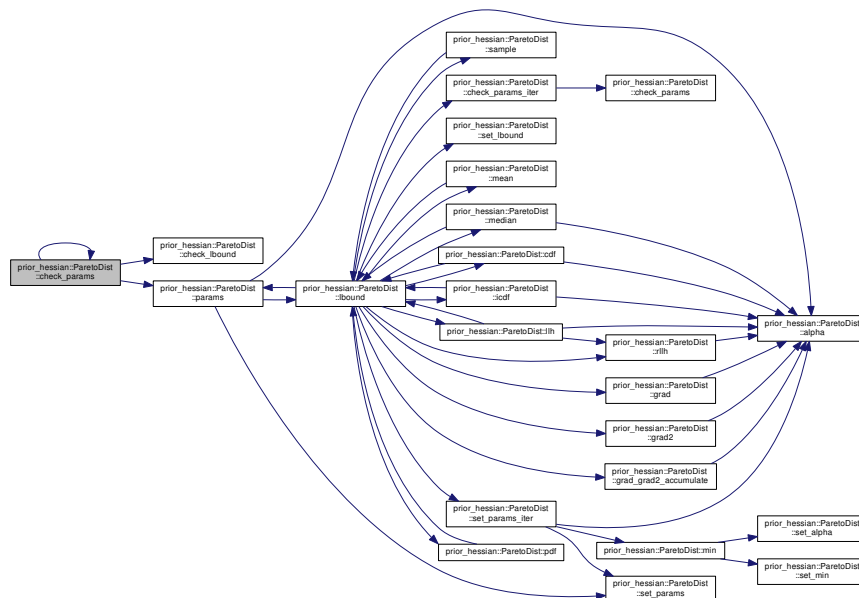



Here is the caller graph for this function:




7.56.4.7 `template<class IterT > bool prior_hessian::ParetoDist::check_params_iter ( IterT & params ) [static]`

Definition at line 111 of file ParetoDist.h.


References `check_params()`.

Referenced by `lbound()`.

Here is the call graph for this function:



Here is the caller graph for this function:

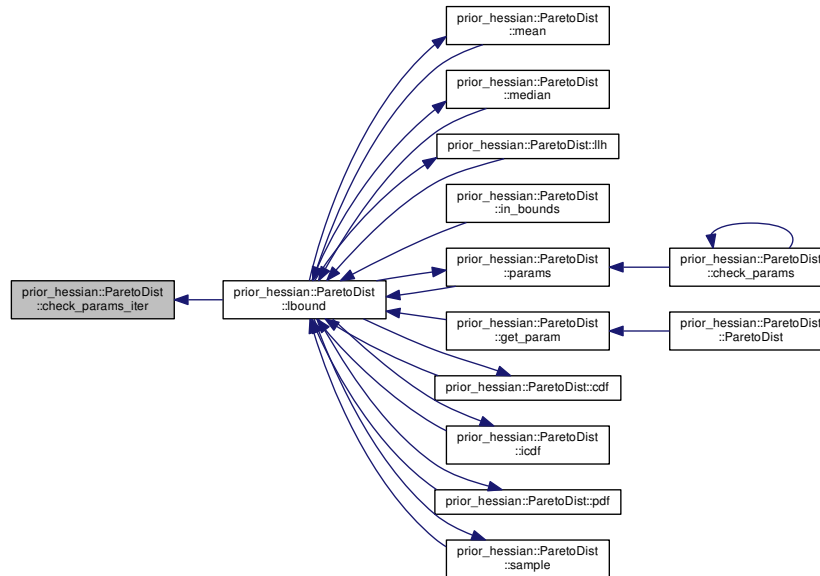


7.56.4.8 `double prior_hessian::ParetoDist::get_param ( int idx ) const [inline]`

Definition at line 119 of file ParetoDist.h.

References `lbound()`.

Referenced by `ParetoDist()`.

Here is the call graph for this function:

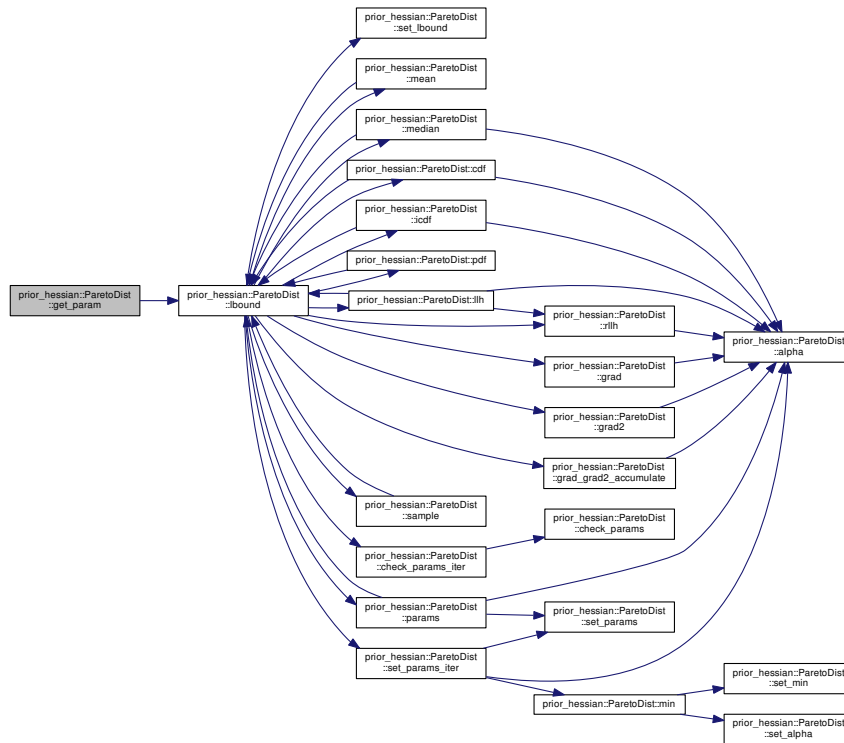

Here is the caller graph for this function:



**7.56.4.9** `static constexpr double prior_hessian::ParetoDist::global_lbound ( ) [inline],[static]`

Definition at line 26 of file ParetoDist.h.


**7.56.4.10** `double prior_hessian::ParetoDist::grad ( double x ) const [inline]`

Definition at line 179 of file ParetoDist.h.


References alpha().

Referenced by lbound().

Here is the call graph for this function:



Here is the caller graph for this function:

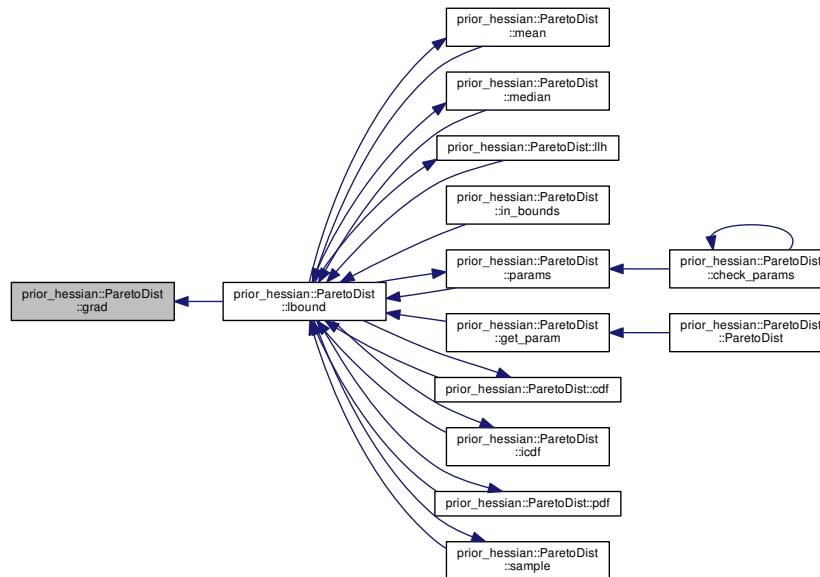


```
7.56.4.11 double prior_hessian::ParetoDist::grad2 ( double x ) const [inline]
```

Definition at line 185 of file ParetoDist.h.


References alpha().

Referenced by lbound().

Here is the call graph for this function:



Here is the caller graph for this function:

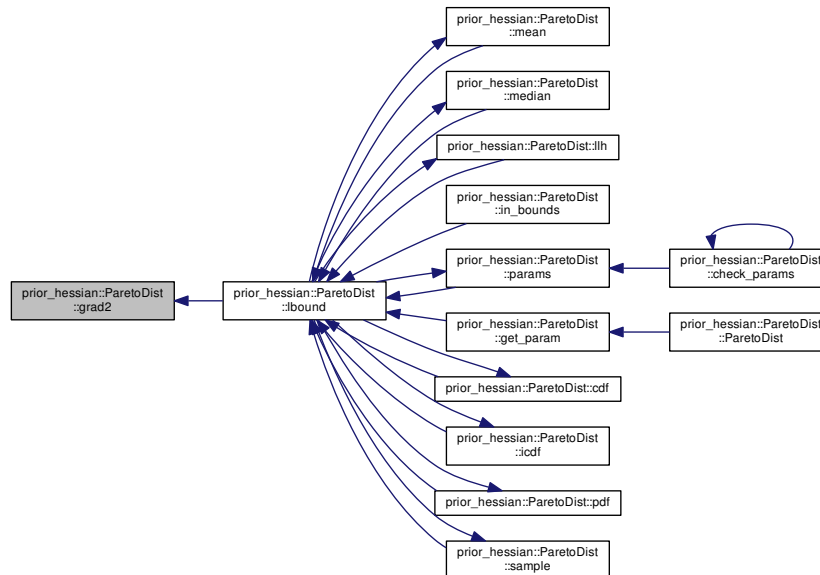


7.56.4.12 `void prior_hessian::ParetoDist::grad_grad2_accumulate ( double x, double & g, double & g2 ) const [inline]`

Definition at line 191 of file `ParetoDist.h`.


References `alpha()`.

Referenced by `lbound()`.

Here is the call graph for this function:



Here is the caller graph for this function:

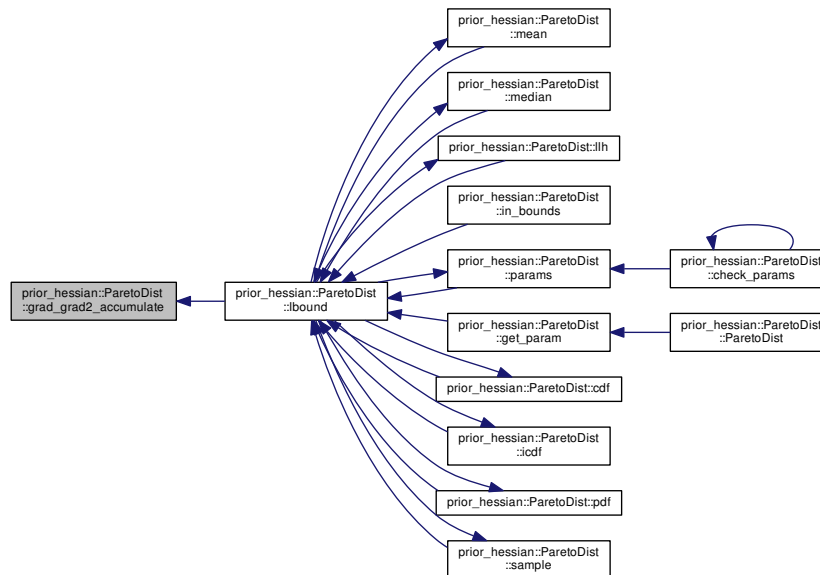


#### 7.56.4.13 `double prior_hessian::ParetoDist::icdf ( double u ) const [inline]`

Definition at line 161 of file `ParetoDist.h`.


References `alpha()`, and `lbound()`.

Referenced by `lbound()`.

Here is the call graph for this function:

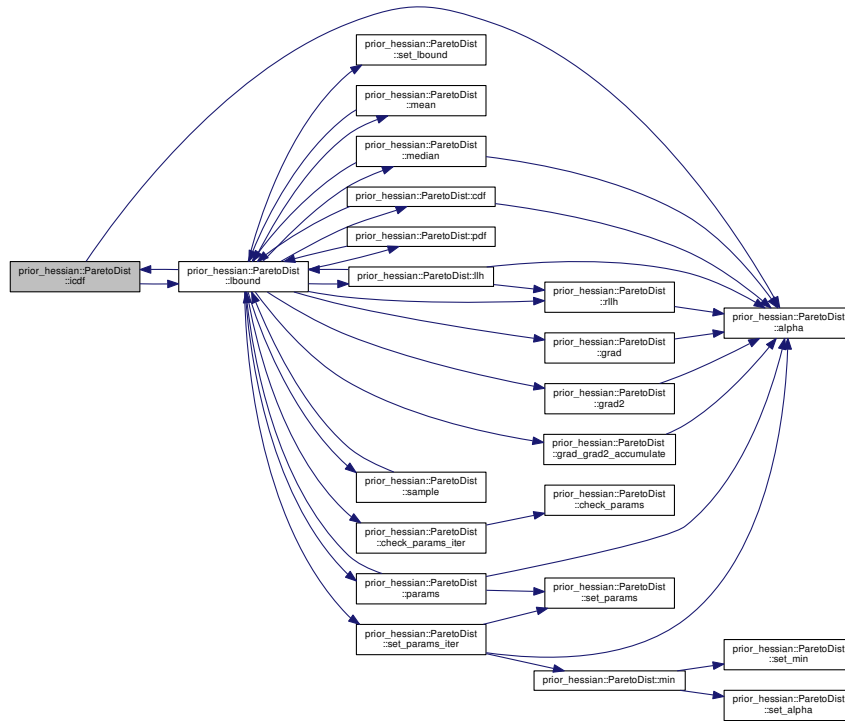

Here is the caller graph for this function:

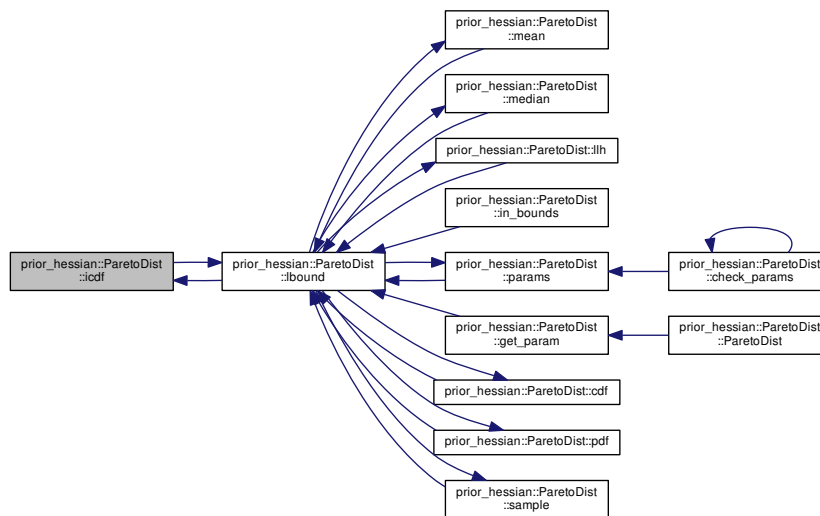


7.56.4.14 bool prior\_hessian::ParetoDist::in\_bounds ( double *u* ) const [inline]

Definition at line 28 of file ParetoDist.h.

References lbound(), and ubound().

Here is the call graph for this function:

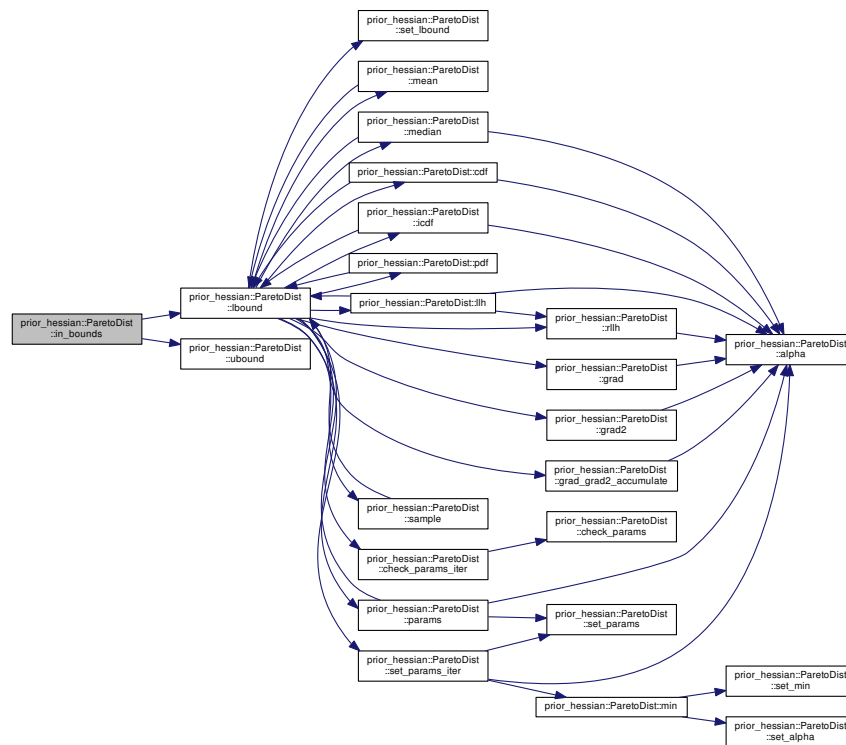

## 7.56.4.15 double prior\_hessian::ParetoDist::lbound ( ) const [inline]


Definition at line 60 of file ParetoDist.h.

References cdf(), check\_params\_iter(), grad(), grad2(), grad\_grad2\_accumulate(), icdf(), llh(), mean(), median(), params(), pdf(), rllh(), sample(), set\_lbound(), and set\_params\_iter().


Referenced by cdf(), get\_param(), icdf(), in\_bounds(), llh(), mean(), median(), params(), pdf(), and sample().



Here is the call graph for this function:

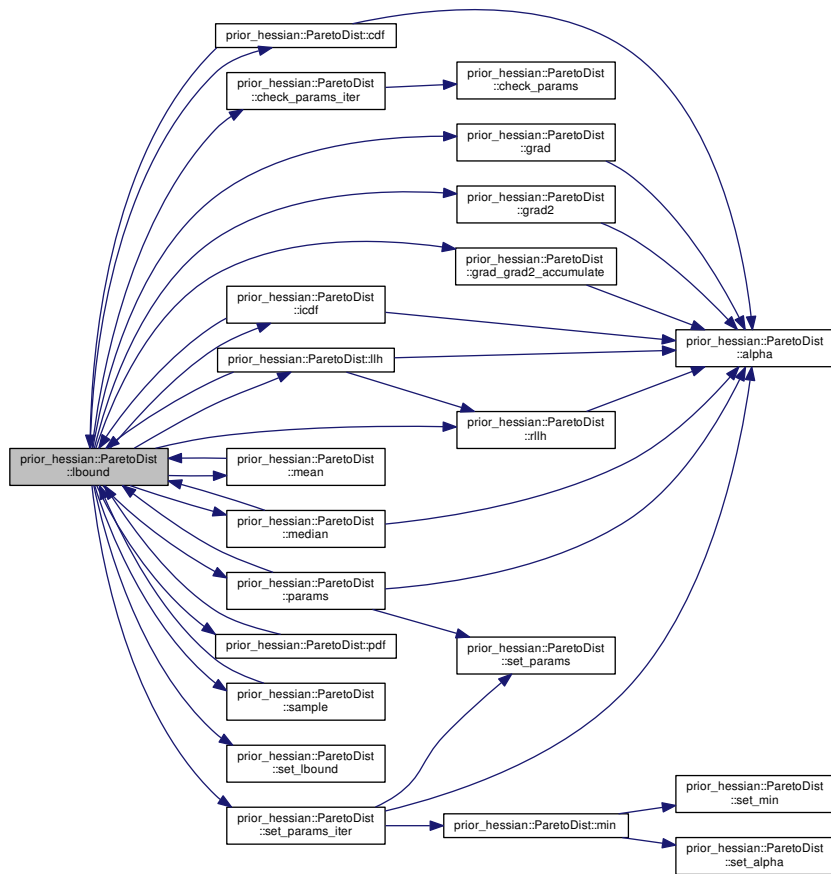

Here is the caller graph for this function:

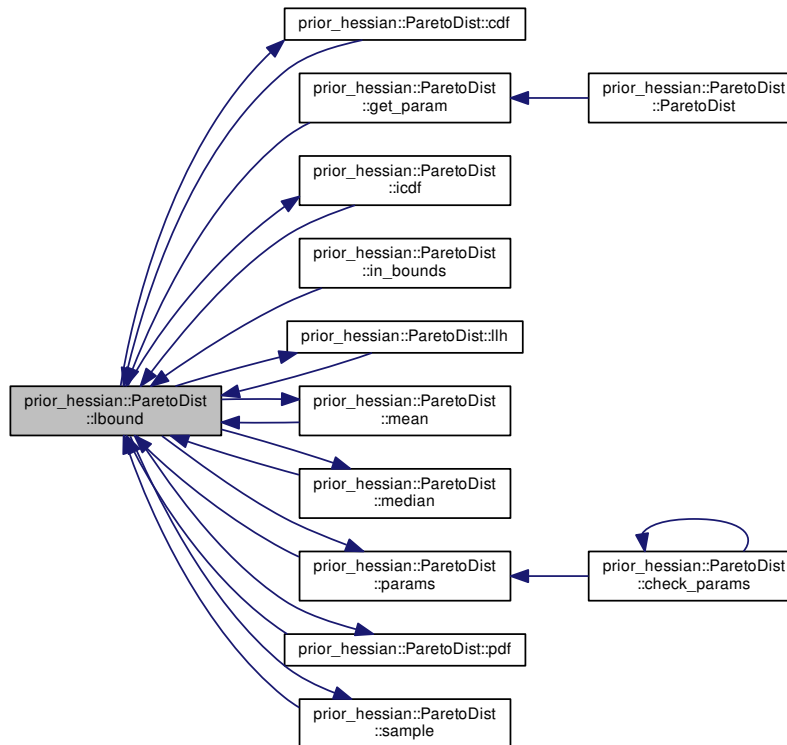


#### 7.56.4.16 double prior\_hessian::ParetoDist::llh ( double x ) const

Definition at line 64 of file ParetoDist.cpp.


References `alpha()`, `lbound()`, and `rlh()`.

Referenced by `lbound()`.

Here is the call graph for this function:

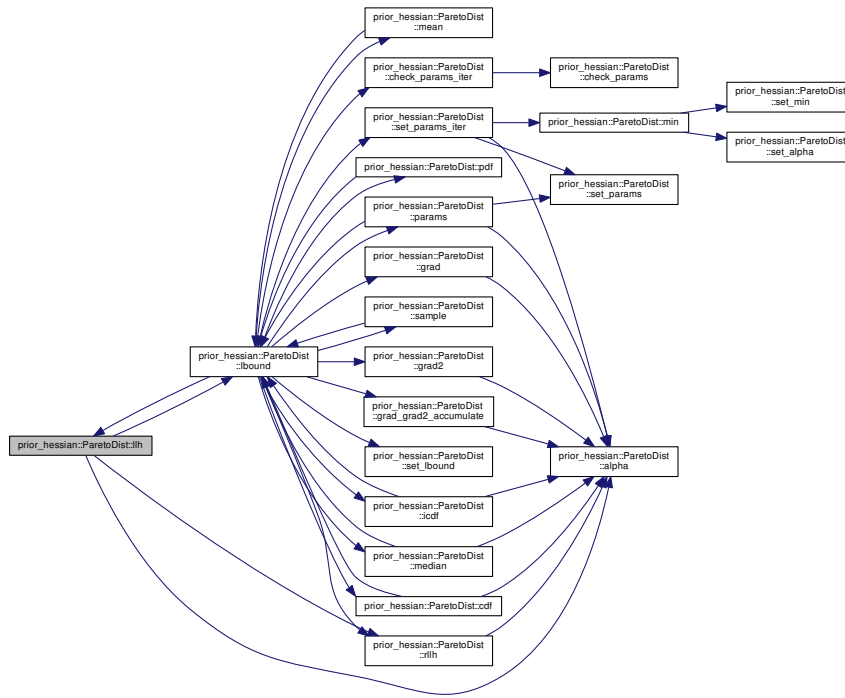

Here is the caller graph for this function:

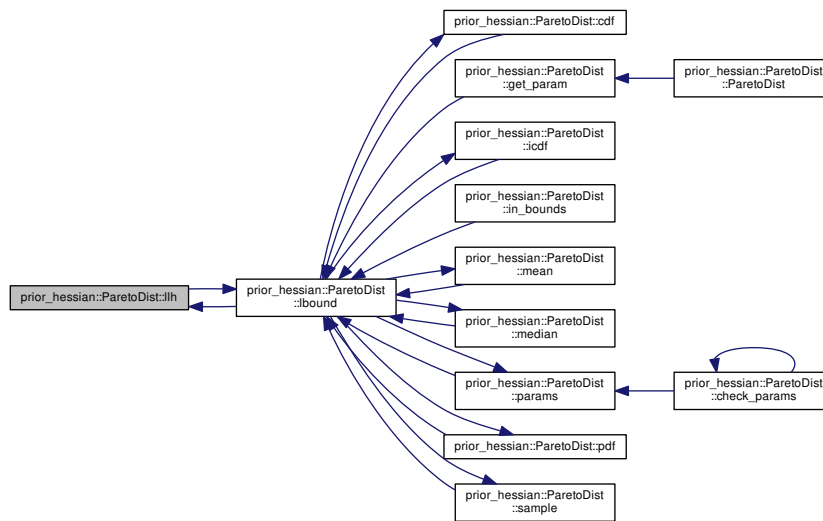


## 7.56.4.17 double prior\_hessian::ParetoDist::mean ( ) const

Definition at line 54 of file ParetoDist.cpp.


References lbound().

Referenced by lbound().

Here is the call graph for this function:

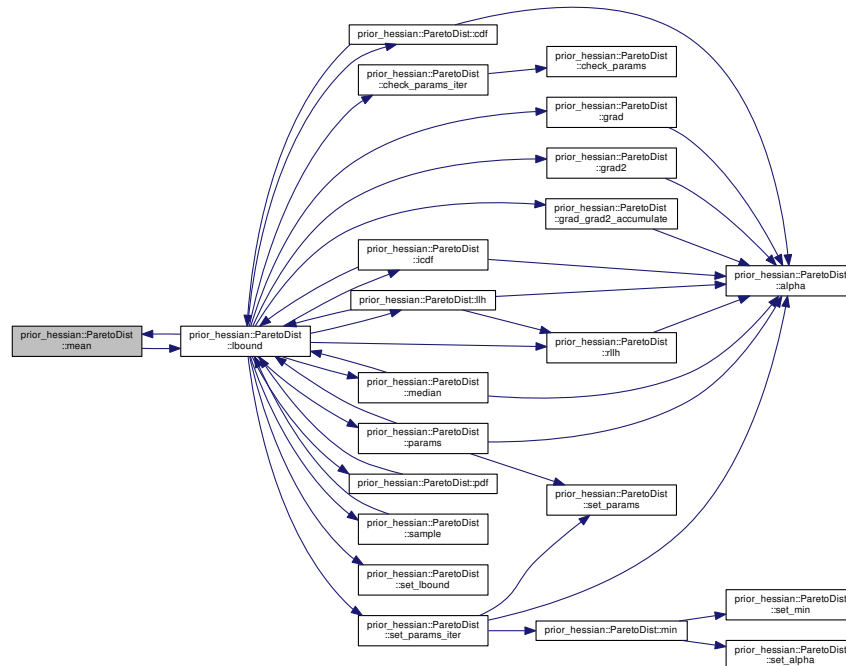

Here is the caller graph for this function:

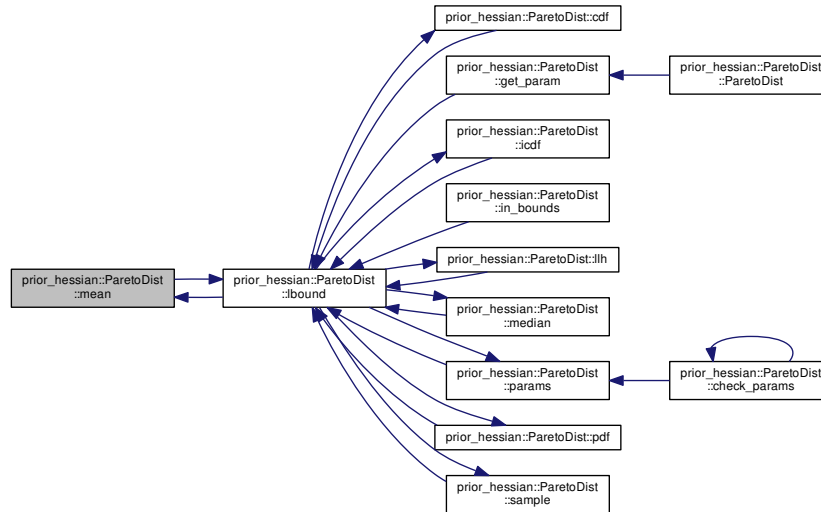


#### 7.56.4.18 double prior\_hessian::ParetoDist::median ( ) const

Definition at line 59 of file ParetoDist.cpp.


References `alpha()`, and `lbound()`.

Referenced by `lbound()`.

Here is the call graph for this function:

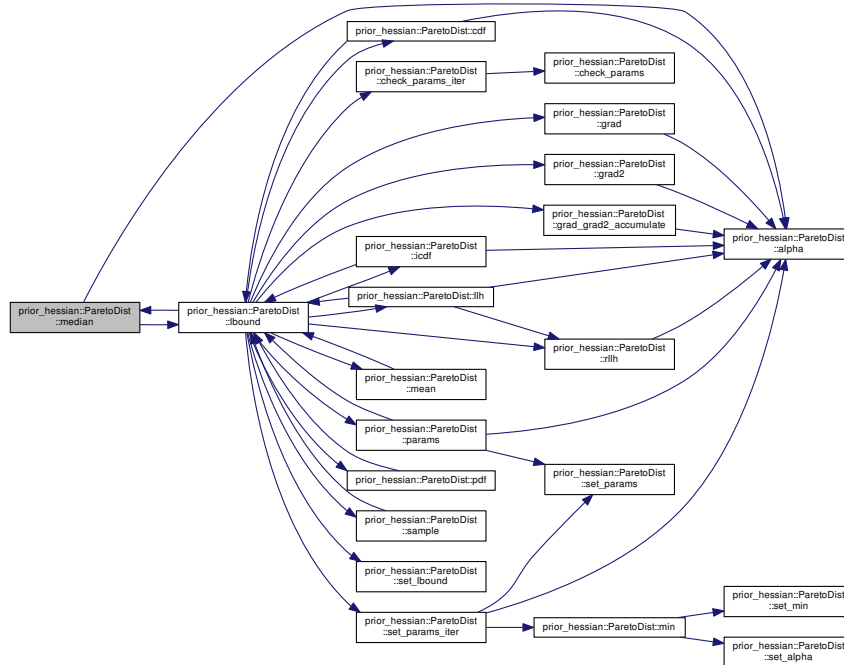

Here is the caller graph for this function:

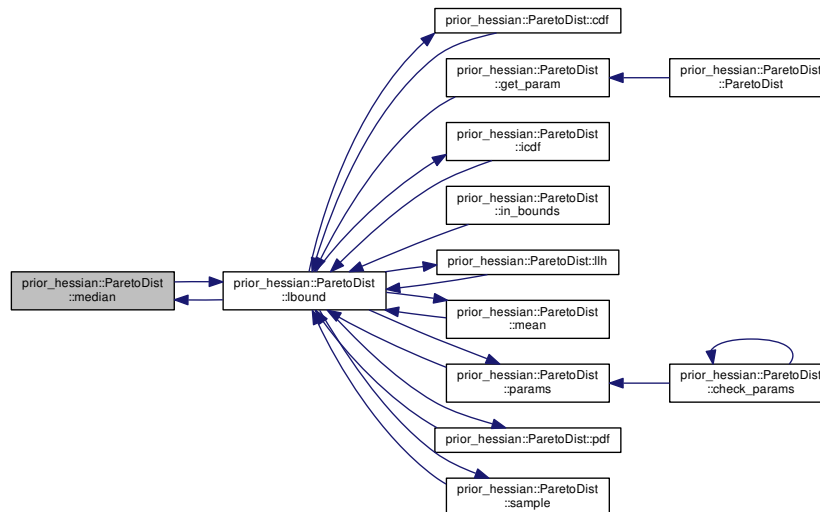


#### 7.56.4.19 double prior\_hessian::ParetoDist::min ( ) const [inline]

Definition at line 56 of file ParetoDist.h.


References `set_alpha()`, and `set_min()`.

Referenced by `operator==(())`, `param_ubound()`, and `set_params_iter()`.

Here is the call graph for this function:

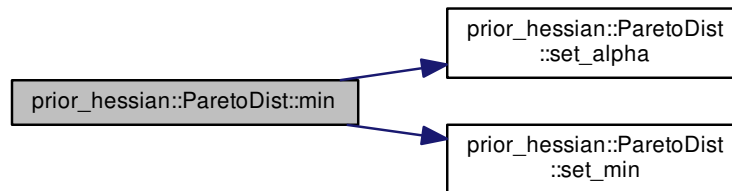

Here is the caller graph for this function:

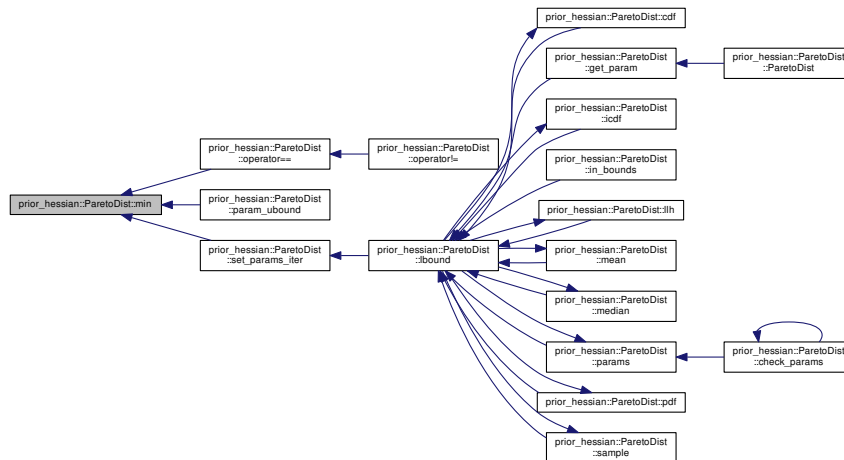

**7.56.4.20** `static constexpr IdxT prior_hessian::UnivariateDist::num_dim ( ) [inline],[static],[inherited]`

Definition at line 17 of file `UnivariateDist.h`.

**7.56.4.21** `static constexpr IdxT prior_hessian::ParetoDist::num_params ( ) [inline],[static]`


Definition at line 25 of file `ParetoDist.h`.

## 7.56.4.22 bool prior\_hessian::ParetoDist::operator!=( const ParetoDist &amp; o ) const [inline]

Definition at line 53 of file ParetoDist.h.

References operator==().

Here is the call graph for this function:




## 7.56.4.23 bool prior\_hessian::ParetoDist::operator==( const ParetoDist &amp; o ) const [inline]

Definition at line 52 of file ParetoDist.h.

References alpha(), and min().

Referenced by operator!=().

Here is the call graph for this function:

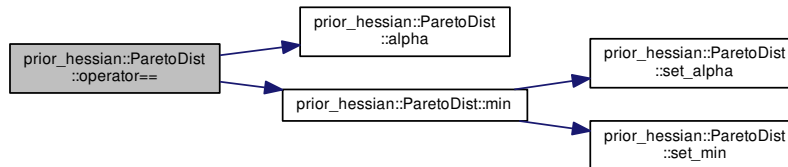

Here is the caller graph for this function:





7.56.4.24 `static const NparamsVecT& prior_hessian::ParetoDist::param_lbound ( ) [inline],[static]`

Definition at line 32 of file ParetoDist.h.

7.56.4.25 `static const StringVecT& prior_hessian::ParetoDist::param_names ( ) [inline],[static]`


Definition at line 31 of file ParetoDist.h.

7.56.4.26 `static const NparamsVecT& prior_hessian::ParetoDist::param_ubound ( ) [inline],[static]`

Definition at line 33 of file ParetoDist.h.

References `alpha()`, `check_params()`, and `min()`.

Here is the call graph for this function:

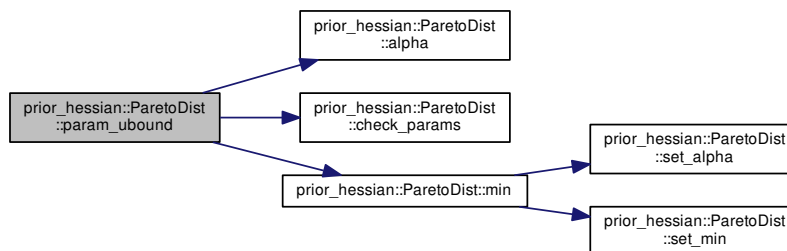


7.56.4.27 `NparamsVecT prior_hessian::ParetoDist::params ( ) const [inline]`

Definition at line 48 of file ParetoDist.h.


References `alpha()`, `lbound()`, and `set_params()`.

Referenced by `check_params()`, and `lbound()`.

Here is the call graph for this function:

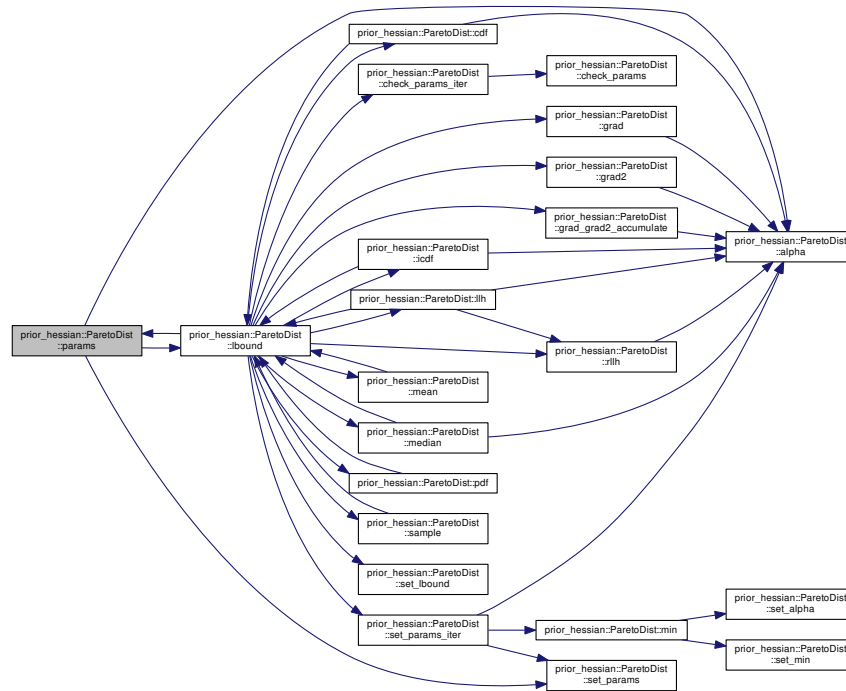

Here is the caller graph for this function:

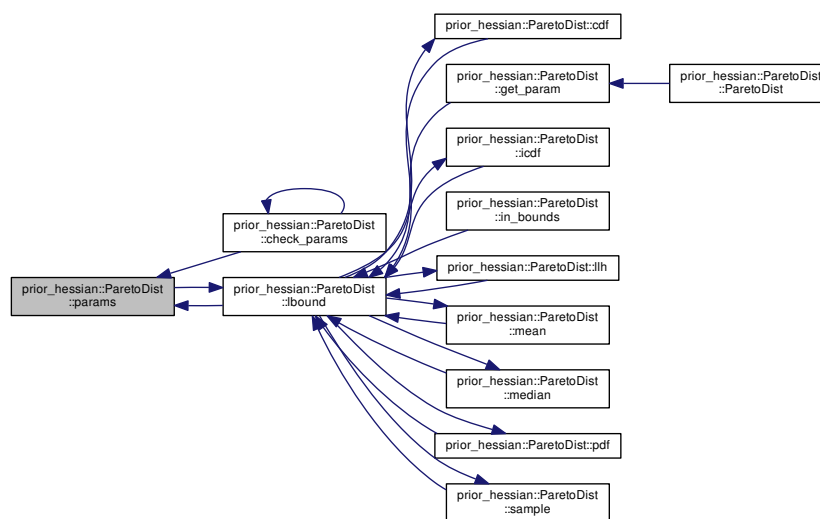


7.56.4.28 `double prior_hessian::ParetoDist::pdf ( double x ) const [inline]`

Definition at line 167 of file ParetoDist.h.


References `lbound()`.

Referenced by `lbound()`.

Here is the call graph for this function:

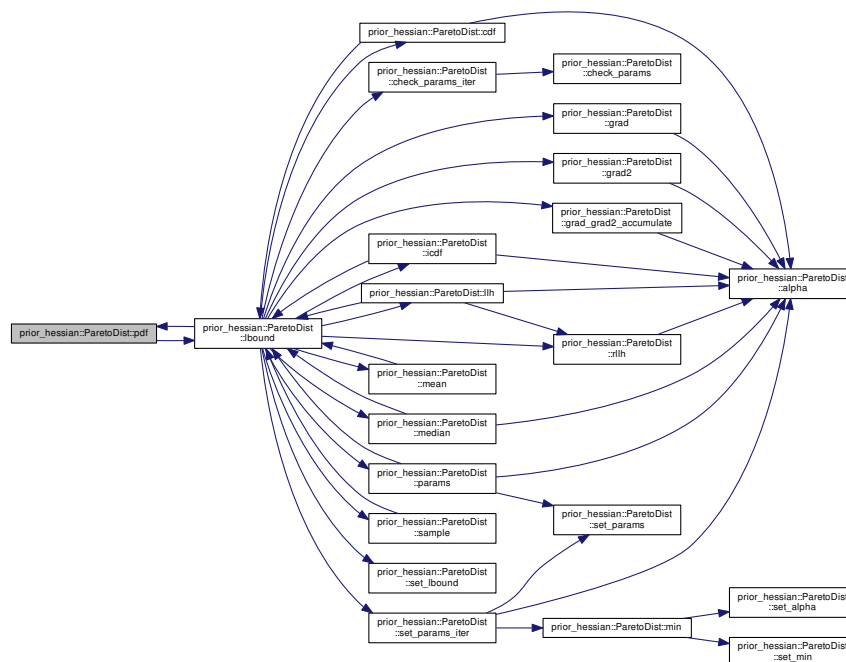

Here is the caller graph for this function:

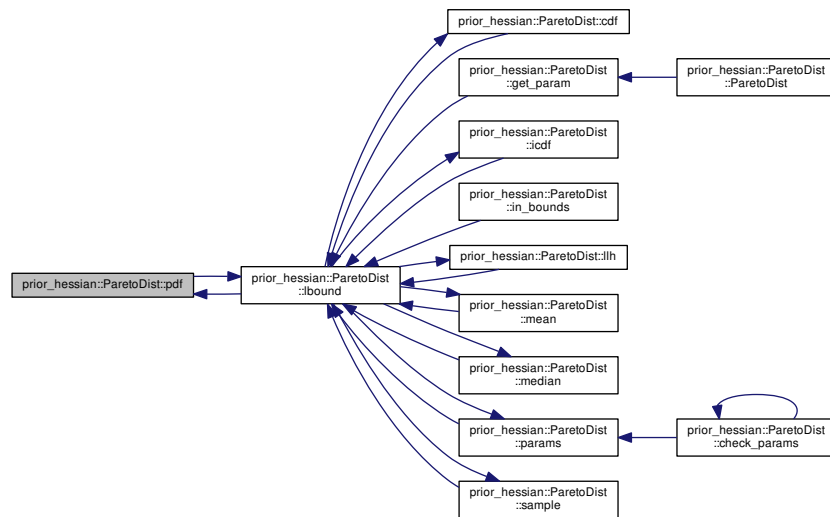


7.56.4.29 `double prior_hessian::ParetoDist::rllh ( double x ) const [inline]`

Definition at line 173 of file ParetoDist.h.


References `alpha()`.

Referenced by `lbound()`, and `llh()`.

Here is the call graph for this function:



Here is the caller graph for this function:

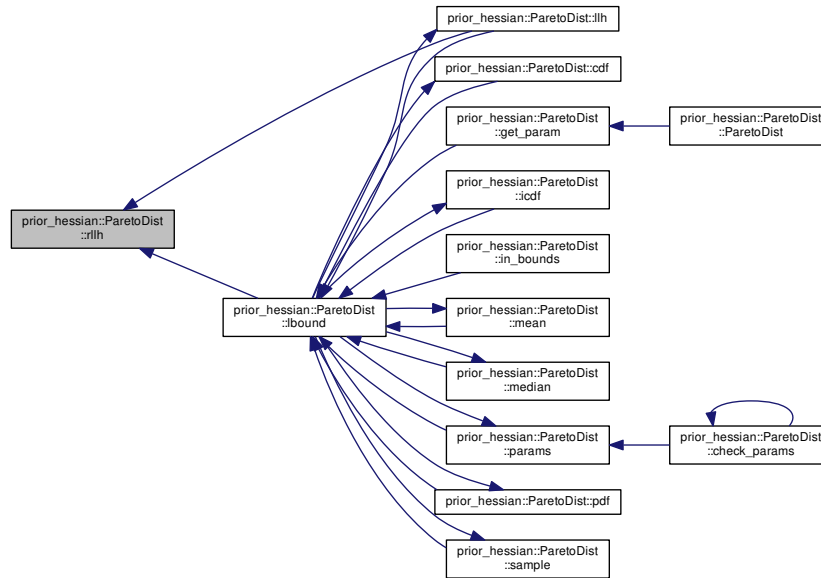


7.56.4.30 `template<class RngT > double prior_hessian::ParetoDist::sample ( RngT & rng ) const`

Definition at line 200 of file ParetoDist.h.


References `lbound()`.

Referenced by `lbound()`.

Here is the call graph for this function:

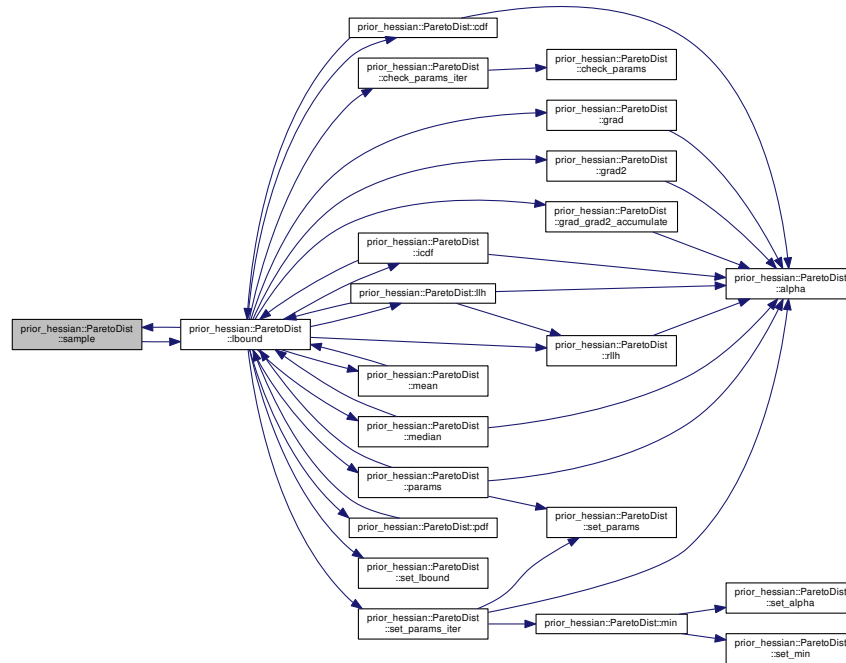

Here is the caller graph for this function:

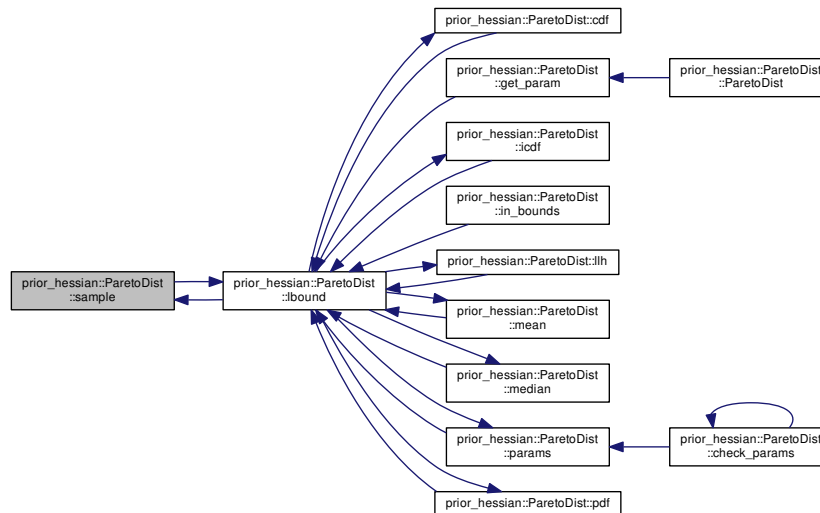


#### 7.56.4.31 void prior\_hessian::ParetoDist::set\_alpha ( double val )

Definition at line 35 of file ParetoDist.cpp.

Referenced by `min()`, and `set_param()`.

Here is the caller graph for this function:

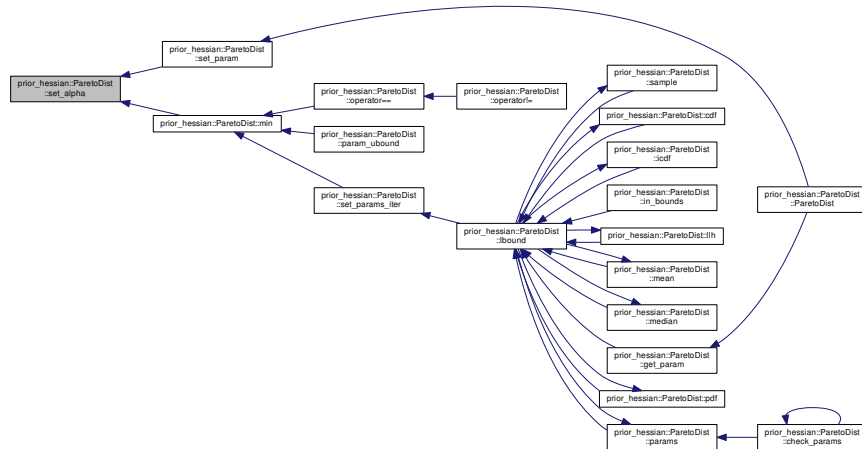


#### 7.56.4.32 void prior\_hessian::ParetoDist::set\_lbound ( double lbound )

Definition at line 48 of file ParetoDist.cpp.

Referenced by `lbound()`.

Here is the caller graph for this function:

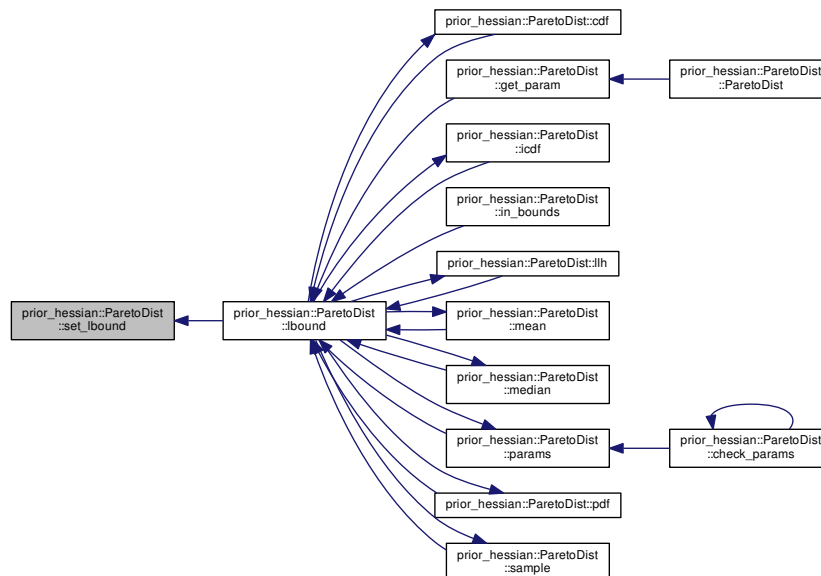


## 7.56.4.33 void prior\_hessian::ParetoDist::set\_min ( double val )

Definition at line 29 of file ParetoDist.cpp.

Referenced by min(), and set\_param().

Here is the caller graph for this function:

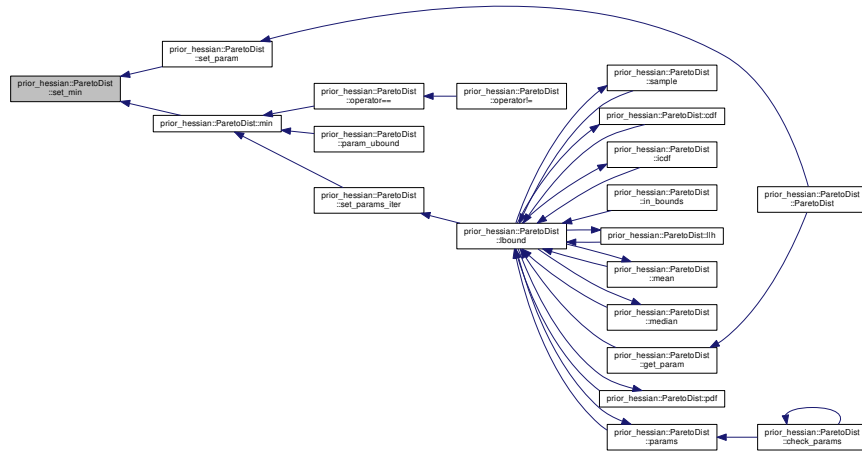


## 7.56.4.34 void prior\_hessian::ParetoDist::set\_param ( int idx, double val ) [inline]

Definition at line 133 of file ParetoDist.h.

References `set_alpha()`, and `set_min()`.


Referenced by `ParetoDist()`.

Here is the call graph for this function:

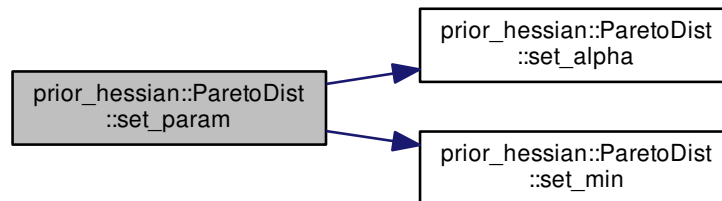



Here is the caller graph for this function:




#### 7.56.4.35 `void prior_hessian::ParetoDist::set_params ( double min, double alpha )`

Definition at line 41 of file ParetoDist.cpp.

Referenced by `params()`, and `set_params_iter()`.

Here is the caller graph for this function:

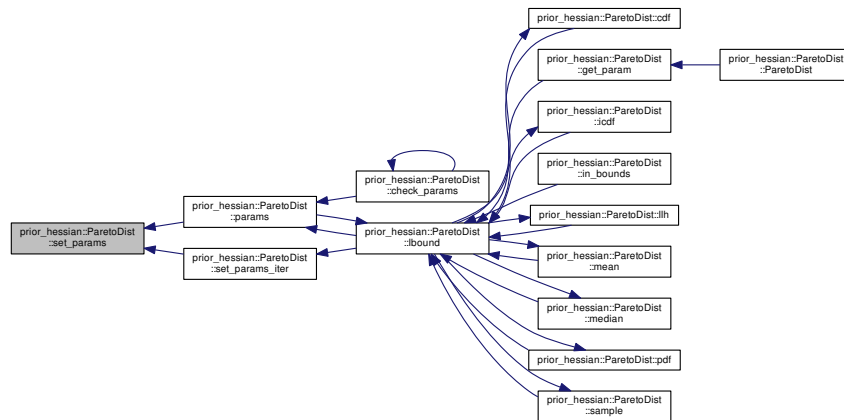


#### 7.56.4.36 `template<class Vec > void prior_hessian::ParetoDist::set_params ( const Vec & p ) [inline]`

Definition at line 51 of file ParetoDist.h.


References `set_params()`.

Referenced by `set_params()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.56.4.37 `template<class IterT > void prior_hessian::ParetoDist::set_params_iter ( IterT & params )`

Definition at line 208 of file ParetoDist.h.


References `alpha()`, `min()`, and `set_params()`.

Referenced by `lbound()`.

Here is the call graph for this function:

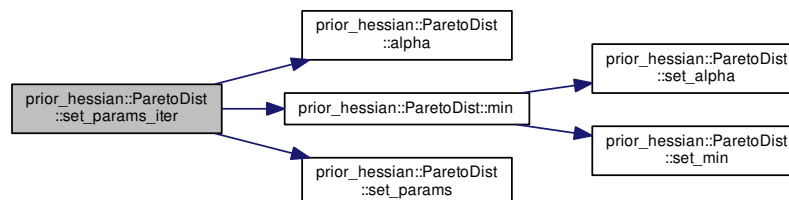

Here is the caller graph for this function:

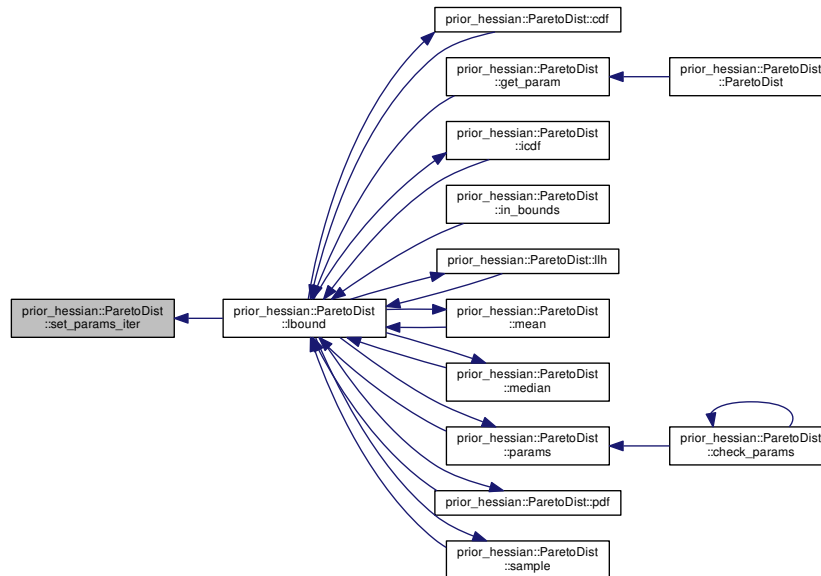

**7.56.4.38** `static constexpr double prior_hessian::ParetoDist::ubound ( ) [inline], [static]`

Definition at line 27 of file ParetoDist.h.

Referenced by `in_bounds()`.

Here is the caller graph for this function:




The documentation for this class was generated from the following files:

- [ParetoDist.h](#)
- [ParetoDist.cpp](#)


## 7.57 prior\_hessian::PriorHessianError Class Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::PriorHessianError:

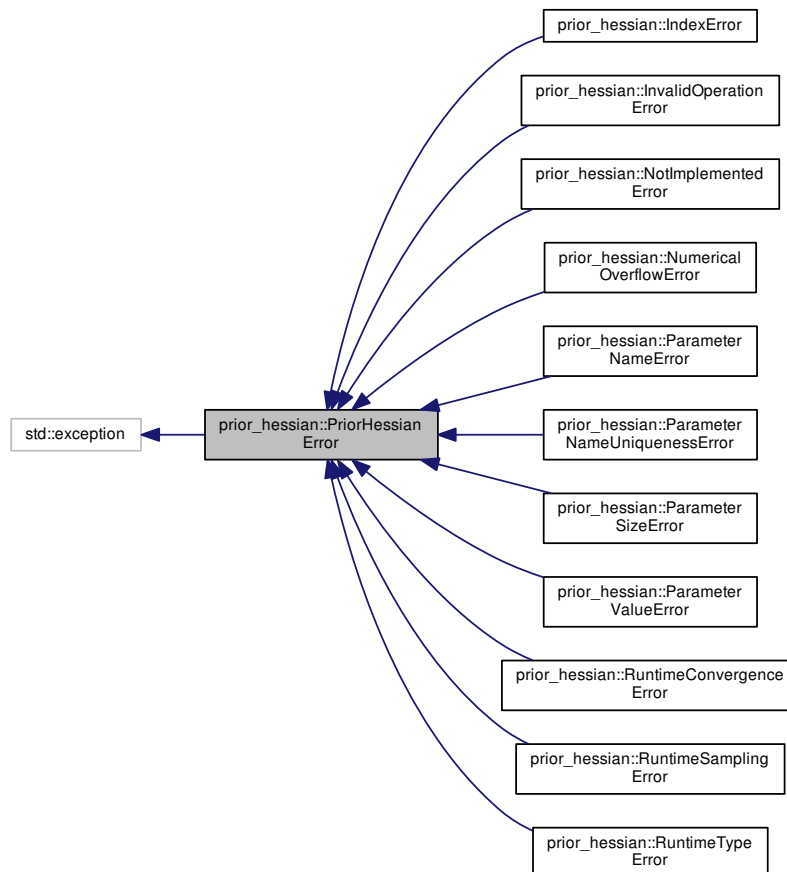

Collaboration diagram for `prior_hessian::PriorHessianError`:

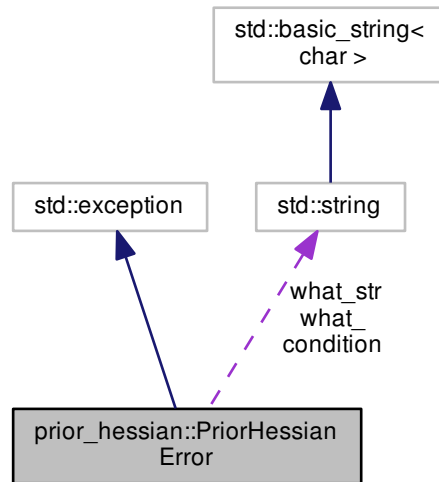

#### Public Member Functions

- `PriorHessianError` (`std::string condition`, `std::string what`)
- `const char * what () const noexcept override`

#### Protected Attributes

- `std::string condition`
- `std::string what_str`
- `std::string what_`

#### 7.57.1 Detailed Description

Definition at line 43 of file `PriorHessianError.h`.

#### 7.57.2 Constructor & Destructor Documentation

7.57.2.1 `prior_hessian::PriorHessianError::PriorHessianError ( std::string condition, std::string what ) [inline]`

Definition at line 50 of file `PriorHessianError.h`.

### 7.57.3 Member Function Documentation

7.57.3.1 `const char* prior_hessian::PriorHessianError::what( ) const` `[inline]`, `[override]`, `[noexcept]`

Definition at line 56 of file `PriorHessianError.h`.

### 7.57.4 Member Data Documentation

7.57.4.1 `std::string prior_hessian::PriorHessianError::condition` `[protected]`

Definition at line 46 of file `PriorHessianError.h`.

7.57.4.2 `std::string prior_hessian::PriorHessianError::what_` `[protected]`

Definition at line 48 of file `PriorHessianError.h`.

7.57.4.3 `std::string prior_hessian::PriorHessianError::what_str` `[protected]`

Definition at line 47 of file `PriorHessianError.h`.


The documentation for this class was generated from the following file:

- [PriorHessianError.h](#)


## 7.58 prior\_hessian::RuntimeConvergenceError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for `prior_hessian::RuntimeConvergenceError`:

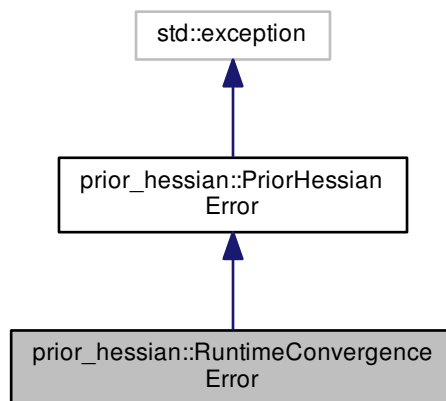

Collaboration diagram for `prior_hessian::RuntimeConvergenceError`:

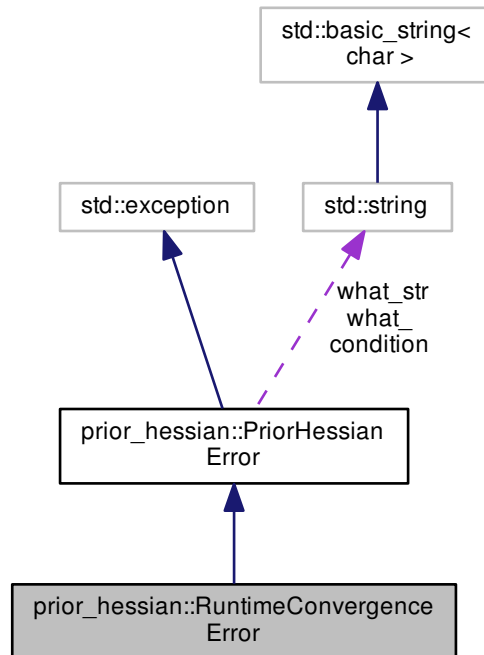

#### Public Member Functions

- [RuntimeConvergenceError](#) (std::string message)
- `const char * what () const noexcept override`

#### Protected Attributes

- std::string `condition`
- std::string `what_str`
- std::string `what_`

#### 7.58.1 Detailed Description

Definition at line 94 of file `PriorHessianError.h`.

#### 7.58.2 Constructor & Destructor Documentation

7.58.2.1 `prior_hessian::RuntimeConvergenceError::RuntimeConvergenceError ( std::string message ) [inline]`

Definition at line 96 of file `PriorHessianError.h`.

### 7.58.3 Member Function Documentation

**7.58.3.1** `const char* prior_hessian::PriorHessianError::what ( ) const` `[inline]`, `[override]`, `[noexcept]`, `[inherited]`

Definition at line 56 of file PriorHessianError.h.

### 7.58.4 Member Data Documentation

**7.58.4.1** `std::string prior_hessian::PriorHessianError::condition` `[protected]`, `[inherited]`

Definition at line 46 of file PriorHessianError.h.

**7.58.4.2** `std::string prior_hessian::PriorHessianError::what_` `[protected]`, `[inherited]`

Definition at line 48 of file PriorHessianError.h.

**7.58.4.3** `std::string prior_hessian::PriorHessianError::what_str` `[protected]`, `[inherited]`

Definition at line 47 of file PriorHessianError.h.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)

## 7.59 prior\_hessian::RuntimeSamplingError Struct Reference


```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::RuntimeSamplingError:

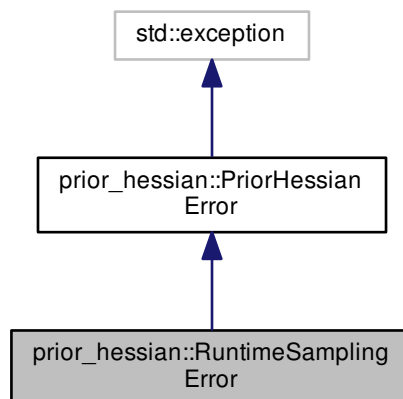



Collaboration diagram for `prior_hessian::RuntimeSamplingError`:

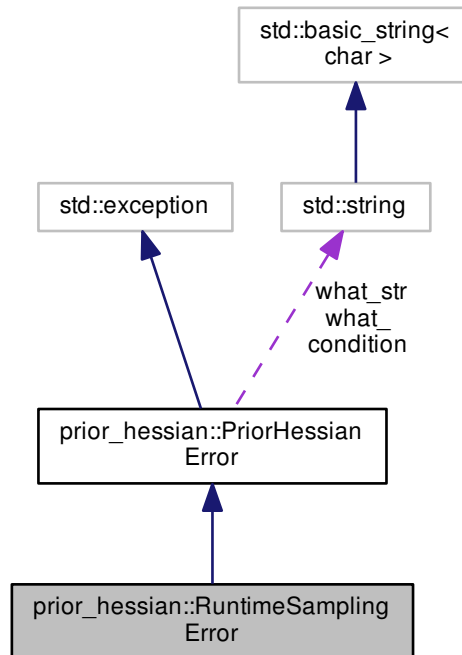

#### Public Member Functions

- [RuntimeSamplingError](#) (`std::string` message)
- `const char * what () const noexcept override`

#### Protected Attributes

- `std::string` `condition`
- `std::string` `what_str`
- `std::string` `what_`

#### 7.59.1 Detailed Description

Definition at line 99 of file `PriorHessianError.h`.

#### 7.59.2 Constructor & Destructor Documentation

7.59.2.1 `prior_hessian::RuntimeSamplingError::RuntimeSamplingError ( std::string message ) [inline]`

Definition at line 101 of file `PriorHessianError.h`.

### 7.59.3 Member Function Documentation

7.59.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` [inline],[override],[noexcept],[inherited]

Definition at line 56 of file PriorHessianError.h.

### 7.59.4 Member Data Documentation

7.59.4.1 `std::string prior_hessian::PriorHessianError::condition` [protected],[inherited]

Definition at line 46 of file PriorHessianError.h.

7.59.4.2 `std::string prior_hessian::PriorHessianError::what_` [protected],[inherited]

Definition at line 48 of file PriorHessianError.h.

7.59.4.3 `std::string prior_hessian::PriorHessianError::what_str` [protected],[inherited]

Definition at line 47 of file PriorHessianError.h.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.60 prior\_hessian::RuntimeTypeError Struct Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
PriorHessianError.h>
```

Inheritance diagram for prior\_hessian::RuntimeTypeError:

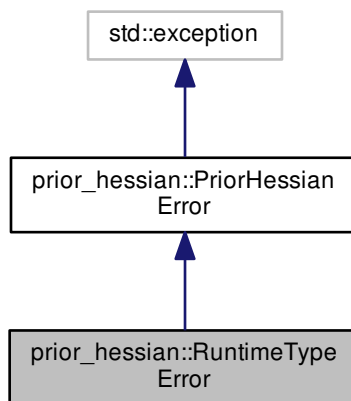

Collaboration diagram for `prior_hessian::RuntimeTypeError`:

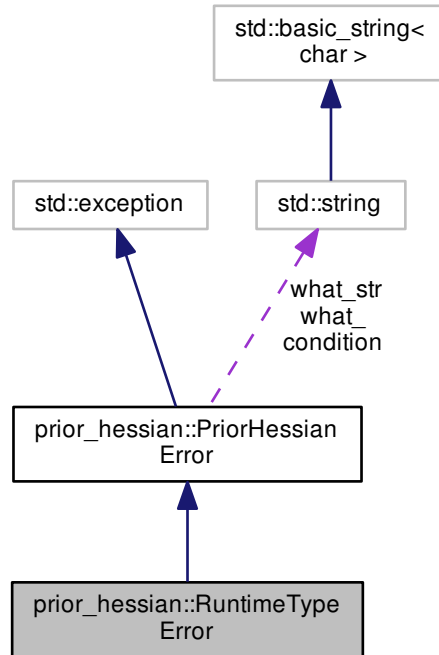

#### Public Member Functions

- [RuntimeTypeError](#) (`std::string` message)
- `const char * what () const noexcept override`

#### Protected Attributes

- `std::string condition`
- `std::string what_str`
- `std::string what_`

#### 7.60.1 Detailed Description

Definition at line 104 of file `PriorHessianError.h`.

#### 7.60.2 Constructor & Destructor Documentation

7.60.2.1 `prior_hessian::RuntimeTypeError::RuntimeTypeError ( std::string message ) [inline]`

Definition at line 106 of file `PriorHessianError.h`.

### 7.60.3 Member Function Documentation

7.60.3.1 `const char* prior_hessian::PriorHessianError::what ( ) const` [inline],[override],[noexcept],[inherited]

Definition at line 56 of file PriorHessianError.h.

### 7.60.4 Member Data Documentation

7.60.4.1 `std::string prior_hessian::PriorHessianError::condition` [protected],[inherited]

Definition at line 46 of file PriorHessianError.h.

7.60.4.2 `std::string prior_hessian::PriorHessianError::what_` [protected],[inherited]

Definition at line 48 of file PriorHessianError.h.

7.60.4.3 `std::string prior_hessian::PriorHessianError::what_str` [protected],[inherited]

Definition at line 47 of file PriorHessianError.h.


The documentation for this struct was generated from the following file:

- [PriorHessianError.h](#)


## 7.61 prior\_hessian::ScaledDist< Dist > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
ScaledDist.h>
```

Inheritance diagram for prior\_hessian::ScaledDist< Dist >:



Collaboration diagram for `prior_hessian::ScaledDist< Dist >`:



### Public Member Functions

- `ScaledDist ()`
- `ScaledDist (double lbound, double ubound)`
- `template<typename = meta::EnableIfNotIsSelfT<Dist,ScaledDist>> ScaledDist (const Dist &dist)`
- `template<typename = meta::EnableIfNotIsSelfT<Dist,ScaledDist>> ScaledDist (Dist &&dist)`
- `ScaledDist (const Dist &dist, double lbound, double ubound)`
- `ScaledDist (Dist &&dist, double lbound, double ubound)`
- `double lbound () const`
- `double ubound () const`
- `bool operator== (const ScaledDist< Dist > &o) const`
- `bool operator!= (const ScaledDist< Dist > &o) const`
- `void set_lbound (double lbound)`
- `void set_ubound (double ubound)`
- `void set_bounds (double lbound, double ubound)`
- `double mean () const`
- `double median () const`
- `double cdf (double x) const`
- `double pdf (double x) const`
- `double icdf (double u) const`
- `double llh (double x) const`
- `template<class RngT > double sample (RngT &rng) const`

### Static Public Member Functions

- `static double unscaled_lbound ()`
- `static double unscaled_ubound ()`
- `static double global_lbound ()`
- `static double global_ubound ()`

## Protected Member Functions

- double [convert\\_to\\_unitary\\_coords](#) (double x) const
- double [convert\\_from\\_unitary\\_coords](#) (double u) const

## Protected Attributes

- double [\\_scaled\\_lbound](#)
- double [\\_scaled\\_ubound](#)
- double [scaling\\_ratio](#)
- double [llh\\_scaling\\_const](#)

## 7.61.1 Detailed Description

```
template<class Dist>
class prior_hessian::ScaledDist< Dist >
```

Definition at line 19 of file ScaledDist.h.

## 7.61.2 Constructor &amp; Destructor Documentation

7.61.2.1 `template<class Dist> prior_hessian::ScaledDist< Dist >::ScaledDist ( ) [inline]`


Definition at line 22 of file ScaledDist.h.

7.61.2.2 `template<class Dist> prior_hessian::ScaledDist< Dist >::ScaledDist ( double lbound, double ubound ) [inline]`

Definition at line 23 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::lbound()`, and `prior_hessian::ScaledDist< Dist >::ubound()`.

Here is the call graph for this function:

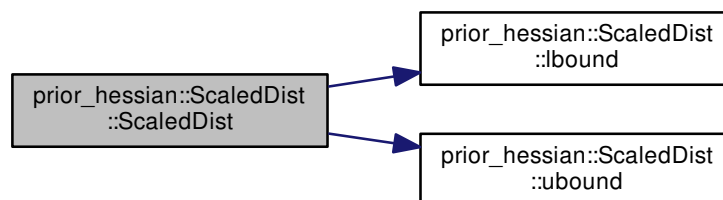

7.61.2.3 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,ScaledDist>>  
prior_hessian::ScaledDist< Dist >::ScaledDist ( const Dist & dist ) [inline]`

Definition at line 26 of file ScaledDist.h.

7.61.2.4 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,ScaledDist>>  
prior_hessian::ScaledDist< Dist >::ScaledDist ( Dist && dist ) [inline]`


Definition at line 29 of file ScaledDist.h.

7.61.2.5 `template<class Dist> prior_hessian::ScaledDist< Dist >::ScaledDist ( const Dist & dist, double lbound, double  
ubound ) [inline]`

Definition at line 31 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::set_bounds()`.

Here is the call graph for this function:

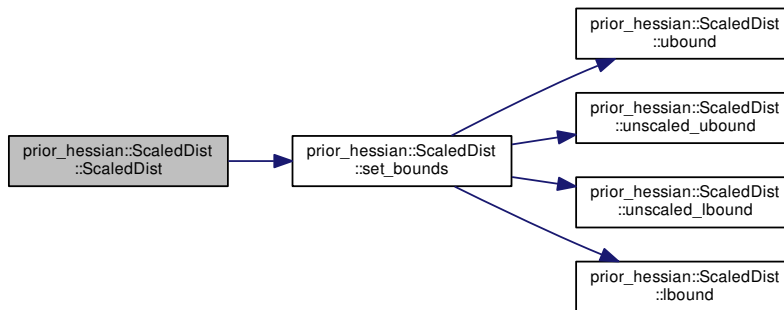


7.61.2.6 `template<class Dist> prior_hessian::ScaledDist< Dist >::ScaledDist ( Dist && dist, double lbound, double  
ubound ) [inline]`

Definition at line 32 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::set_bounds()`.

Here is the call graph for this function:

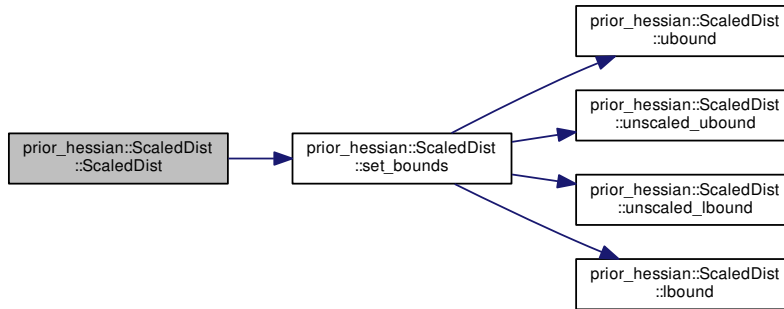

### 7.61.3 Member Function Documentation


#### 7.61.3.1 `template<class Dist > double prior_hessian::ScaledDist< Dist >::cdf ( double x ) const`

Definition at line 112 of file ScaledDist.h.


References `prior_hessian::ScaledDist< Dist >::convert_to_unitary_coords()`.

Referenced by `prior_hessian::ScaledDist< Dist >::median()`.

Here is the call graph for this function:



Here is the caller graph for this function:






**7.61.3.2** `template<class Dist > double prior_hessian::ScaledDist< Dist >::convert_from_unitary_coords ( double u ) const`  
`[protected]`

Definition at line 143 of file ScaledDist.h.


References `prior_hessian::ScaledDist< Dist >::lbound()`, `prior_hessian::ScaledDist< Dist >::scaling_ratio`, and `prior_hessian::ScaledDist< Dist >::unscaled_lbound()`.

Referenced by `prior_hessian::ScaledDist< Dist >::icdf()`, `prior_hessian::ScaledDist< Dist >::mean()`, `prior_hessian::ScaledDist< Dist >::median()`, and `prior_hessian::ScaledDist< Dist >::sample()`.

Here is the call graph for this function:

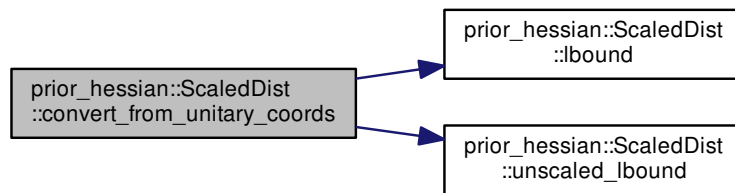

Here is the caller graph for this function:

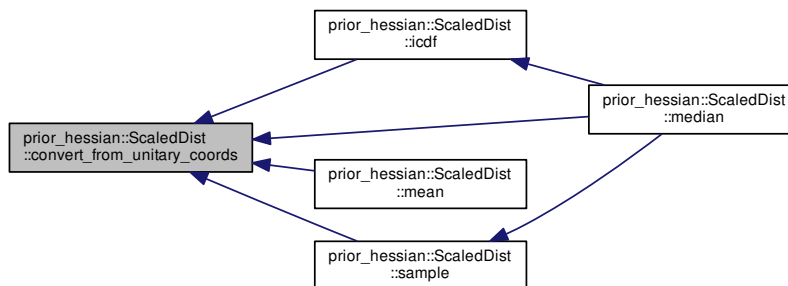


**7.61.3.3** `template<class Dist > double prior_hessian::ScaledDist< Dist >::convert_to_unitary_coords ( double x ) const`  
`[protected]`

Definition at line 137 of file ScaledDist.h.


References `prior_hessian::ScaledDist< Dist >::lbound()`, `prior_hessian::ScaledDist< Dist >::scaling_ratio`, and `prior_hessian::ScaledDist< Dist >::unscaled_lbound()`.

Referenced by prior\_hessian::ScaledDist< Dist >::cdf(), and prior\_hessian::ScaledDist< Dist >::pdf().

Here is the call graph for this function:

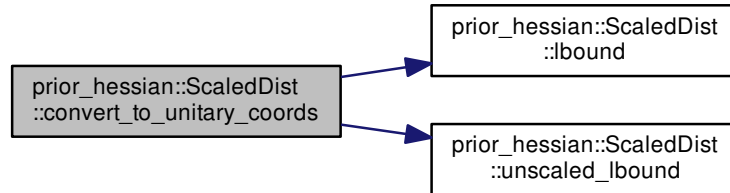

Here is the caller graph for this function:



**7.61.3.4** `template<class Dist> static double prior_hessian::ScaledDist< Dist >::global_lbound ( ) [inline], [static]`

Definition at line 38 of file ScaledDist.h.

**7.61.3.5** `template<class Dist> static double prior_hessian::ScaledDist< Dist >::global_ubound ( ) [inline], [static]`

Definition at line 39 of file ScaledDist.h.


**7.61.3.6** `template<class Dist > double prior_hessian::ScaledDist< Dist >::icdf ( double u ) const`

Definition at line 118 of file ScaledDist.h.

References prior\_hessian::ScaledDist< Dist >::convert\_from\_unitary\_coords().

Referenced by prior\_hessian::ScaledDist< Dist >::median().

Here is the call graph for this function:



Here is the caller graph for this function:




**7.61.3.7** `template<class Dist> double prior_hessian::ScaledDist< Dist >::lbound ( ) const [inline]`

Definition at line 34 of file `ScaledDist.h`.

References `prior_hessian::ScaledDist< Dist >::_scaled_lbound`.

Referenced by `prior_hessian::ScaledDist< Dist >::convert_from_unitary_coords()`, `prior_hessian::ScaledDist< Dist >::convert_to_unitary_coords()`, `prior_hessian::ScaledDist< Dist >::operator!=()`, `prior_hessian::ScaledDist< Dist >::ScaledDist()`, `prior_hessian::ScaledDist< Dist >::set_bounds()`, and `prior_hessian::ScaledDist< Dist >::set_↔ubound()`.

Here is the caller graph for this function:

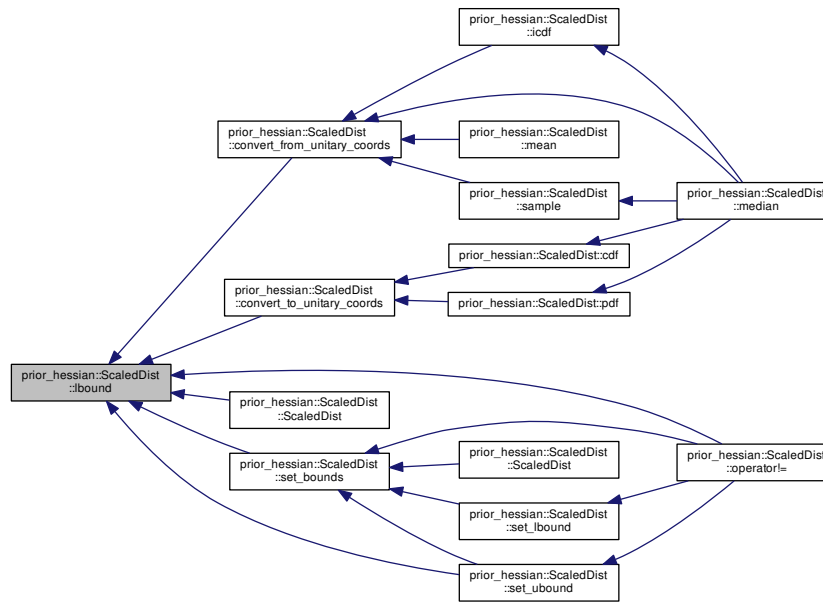


### 7.61.3.8 `template<class Dist > double prior_hessian::ScaledDist< Dist >::llh ( double x ) const`

Definition at line 106 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::llh_scaling_const`.

Referenced by `prior_hessian::ScaledDist< Dist >::median()`.

Here is the caller graph for this function:




### 7.61.3.9 `template<class Dist> double prior_hessian::ScaledDist< Dist >::mean ( ) const [inline]`

Definition at line 53 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::convert_from_unitary_coords()`.

Here is the call graph for this function:




### 7.61.3.10 `template<class Dist> double prior_hessian::ScaledDist< Dist >::median ( ) const [inline]`

Definition at line 54 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::cdf()`, `prior_hessian::ScaledDist< Dist >::convert_from_unitary_coords()`, `prior_hessian::ScaledDist< Dist >::icdf()`, `prior_hessian::ScaledDist< Dist >::llh()`, `prior_hessian::ScaledDist< Dist >::pdf()`, and `prior_hessian::ScaledDist< Dist >::sample()`.

Here is the call graph for this function:

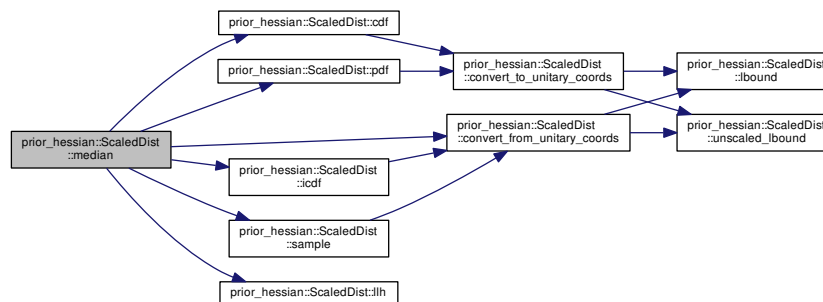


### 7.61.3.11 `template<class Dist> bool prior_hessian::ScaledDist< Dist >::operator!=( const ScaledDist< Dist > & o ) const [inline]`

Definition at line 47 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::lbound()`, `prior_hessian::ScaledDist< Dist >::operator==( )`, `prior_hessian::ScaledDist< Dist >::set_bounds()`, `prior_hessian::ScaledDist< Dist >::set_lbound()`, `prior_hessian::ScaledDist< Dist >::set_ubound()`, and `prior_hessian::ScaledDist< Dist >::ubound()`.

Here is the call graph for this function:

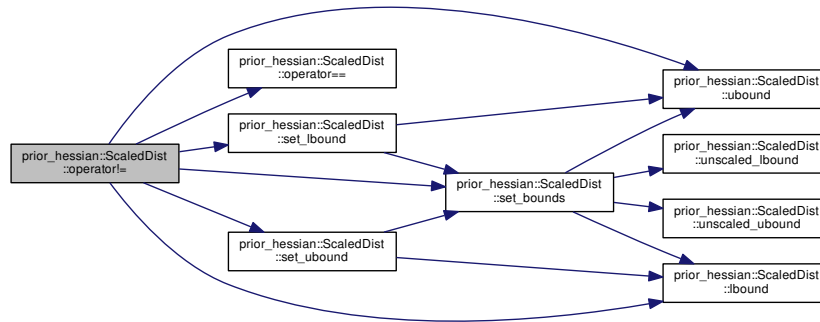

**7.61.3.12** `template<class Dist> bool prior_hessian::ScaledDist< Dist >::operator==( const ScaledDist< Dist > & o ) const [inline]`

Definition at line 41 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::_scaled_lbound`, and `prior_hessian::ScaledDist< Dist >::_scaled_ubound`.

Referenced by `prior_hessian::ScaledDist< Dist >::operator!=( )`.

Here is the caller graph for this function:




**7.61.3.13** `template<class Dist > double prior_hessian::ScaledDist< Dist >::pdf ( double x ) const`

Definition at line 124 of file ScaledDist.h.


References `prior_hessian::ScaledDist< Dist >::convert_to_unitary_coords()`, and `prior_hessian::ScaledDist< Dist >::_scaling_ratio`.

Referenced by `prior_hessian::ScaledDist< Dist >::median()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.61.3.14 `template<class Dist > template<class RngT > double prior_hessian::ScaledDist< Dist >::sample ( RngT & rng ) const`

Definition at line 131 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::convert_from_unitary_coords()`.

Referenced by `prior_hessian::ScaledDist< Dist >::median()`.

Here is the call graph for this function:



Here is the caller graph for this function:




#### 7.61.3.15 `template<class Dist > void prior_hessian::ScaledDist< Dist >::set_bounds ( double lbound, double ubound )`

Definition at line 76 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::_scaled_lbound`, `prior_hessian::ScaledDist< Dist >::_scaled_ubound`, `prior_hessian::ScaledDist< Dist >::lbound()`, `prior_hessian::ScaledDist< Dist >::llh_scaling_const`, `prior_hessian::ScaledDist< Dist >::scaling_ratio`, `prior_hessian::ScaledDist< Dist >::ubound()`, `prior_hessian::ScaledDist< Dist >::unscaled_lbound()`, and `prior_hessian::ScaledDist< Dist >::unscaled_ubound()`.


Referenced by `prior_hessian::ScaledDist< Dist >::operator!=(())`, `prior_hessian::ScaledDist< Dist >::ScaledDist()`, `prior_hessian::ScaledDist< Dist >::set_lbound()`, and `prior_hessian::ScaledDist< Dist >::set_ubound()`.

Here is the call graph for this function:

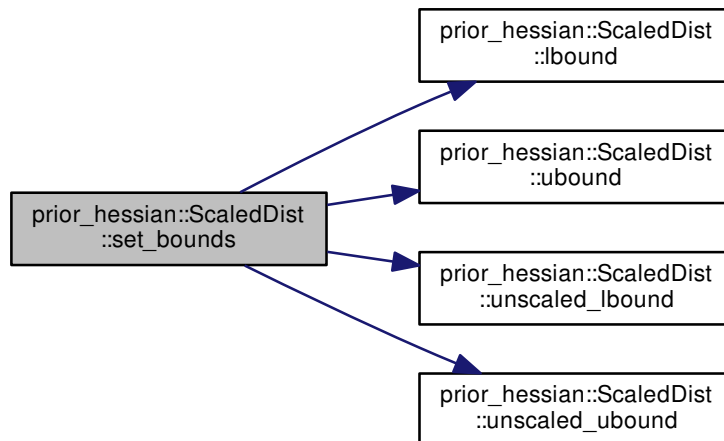



Here is the caller graph for this function:

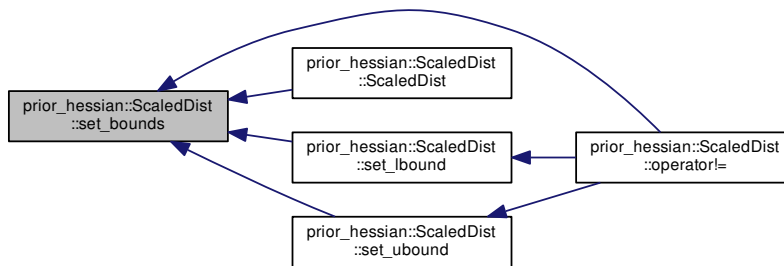


#### 7.61.3.16 `template<class Dist > void prior_hessian::ScaledDist< Dist >::set_lbound ( double lbound )`

Definition at line 98 of file `ScaledDist.h`.

References `prior_hessian::ScaledDist< Dist >::set_bounds()`, and `prior_hessian::ScaledDist< Dist >::ubound()`.

Referenced by `prior_hessian::ScaledDist< Dist >::operator!=()`.

Here is the call graph for this function:

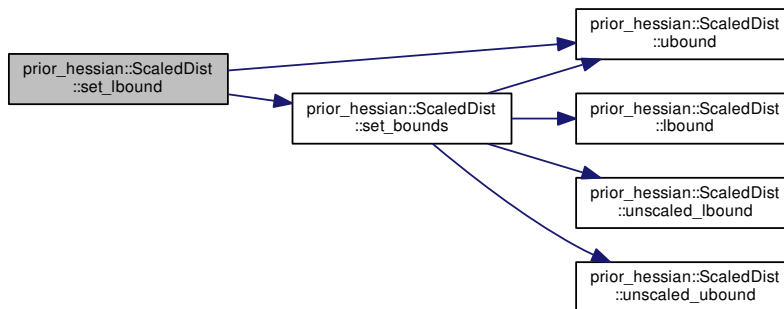

Here is the caller graph for this function:




7.61.3.17 `template<class Dist > void prior_hessian::ScaledDist< Dist >::set_ubound ( double ubound )`

Definition at line 102 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::lbound()`, and `prior_hessian::ScaledDist< Dist >::set_bounds()`.

Referenced by `prior_hessian::ScaledDist< Dist >::operator!==( )`.

Here is the call graph for this function:

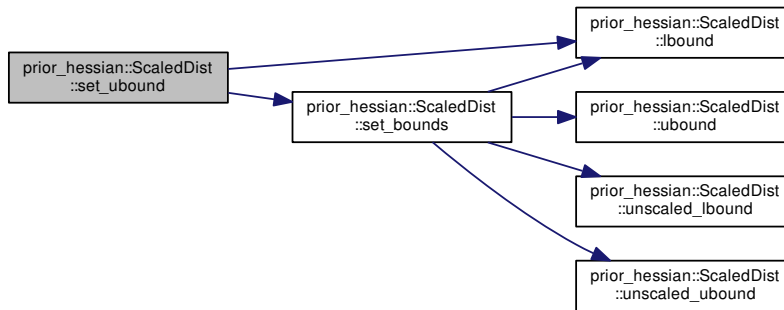

Here is the caller graph for this function:




7.61.3.18 `template<class Dist> double prior_hessian::ScaledDist< Dist >::ubound ( ) const [inline]`

Definition at line 35 of file ScaledDist.h.

References `prior_hessian::ScaledDist< Dist >::_scaled_ubound`.

Referenced by `prior_hessian::ScaledDist< Dist >::operator!==( )`, `prior_hessian::ScaledDist< Dist >::ScaledDist()`, `prior_hessian::ScaledDist< Dist >::set_bounds()`, and `prior_hessian::ScaledDist< Dist >::set_lbound()`.

Here is the caller graph for this function:

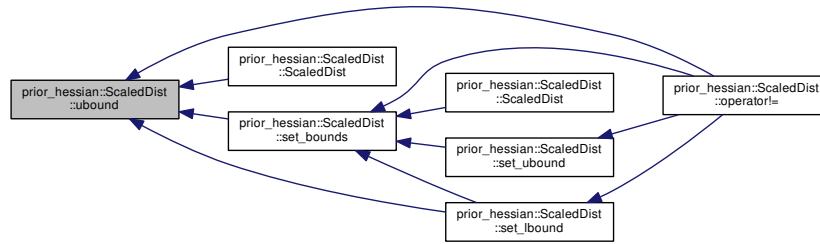


**7.61.3.19** `template<class Dist> static double prior_hessian::ScaledDist< Dist >::unscaled_lbound ( ) [inline], [static]`

Definition at line 36 of file ScaledDist.h.

Referenced by `prior_hessian::ScaledDist< Dist >::convert_from_unitary_coords()`, `prior_hessian::ScaledDist< Dist >::convert_to_unitary_coords()`, and `prior_hessian::ScaledDist< Dist >::set_bounds()`.

Here is the caller graph for this function:

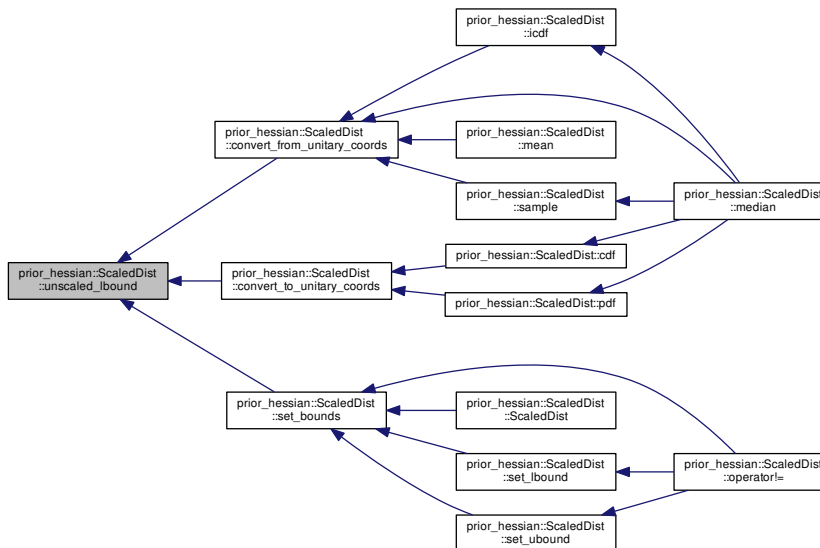


**7.61.3.20** `template<class Dist> static double prior_hessian::ScaledDist< Dist >::unscaled_ubound ( ) [inline], [static]`

Definition at line 37 of file ScaledDist.h.

Referenced by prior\_hessian::ScaledDist< Dist >::set\_bounds().

Here is the caller graph for this function:

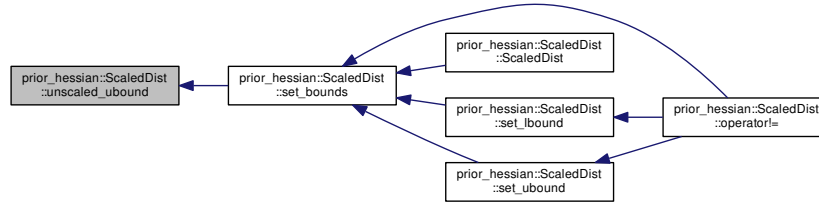

#### 7.61.4 Member Data Documentation

##### 7.61.4.1 `template<class Dist> double prior_hessian::ScaledDist< Dist >::_scaled_lbound` [protected]

Definition at line 64 of file ScaledDist.h.

Referenced by prior\_hessian::ScaledDist< Dist >::lbound(), prior\_hessian::ScaledDist< Dist >::operator==( ), and prior\_hessian::ScaledDist< Dist >::set\_bounds().

##### 7.61.4.2 `template<class Dist> double prior_hessian::ScaledDist< Dist >::_scaled_ubound` [protected]

Definition at line 65 of file ScaledDist.h.

Referenced by prior\_hessian::ScaledDist< Dist >::operator==( ), prior\_hessian::ScaledDist< Dist >::set\_bounds(), and prior\_hessian::ScaledDist< Dist >::ubound().

##### 7.61.4.3 `template<class Dist> double prior_hessian::ScaledDist< Dist >::llh_scaling_const` [protected]

Definition at line 68 of file ScaledDist.h.

Referenced by prior\_hessian::ScaledDist< Dist >::llh(), and prior\_hessian::ScaledDist< Dist >::set\_bounds().

##### 7.61.4.4 `template<class Dist> double prior_hessian::ScaledDist< Dist >::scaling_ratio` [protected]

Definition at line 67 of file ScaledDist.h.

Referenced by prior\_hessian::ScaledDist< Dist >::convert\_from\_unitary\_coords(), prior\_hessian::ScaledDist< Dist >::convert\_to\_unitary\_coords(), prior\_hessian::ScaledDist< Dist >::pdf(), and prior\_hessian::ScaledDist< Dist >::set\_bounds().

The documentation for this class was generated from the following file:


- [ScaledDist.h](#)

## 7.62 prior\_hessian::SymmetricBetaDist Class Reference


Single parameter beta distribution where  $\alpha = \beta$ , leading to symmetric bounded distribution.

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
SymmetricBetaDist.h>
```

Inheritance diagram for prior\_hessian::SymmetricBetaDist:

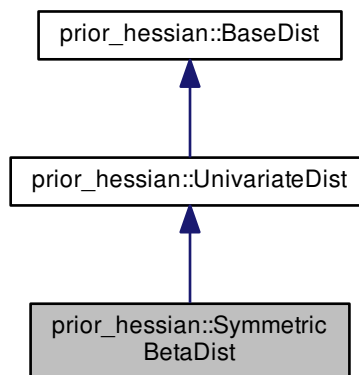

Collaboration diagram for prior\_hessian::SymmetricBetaDist:

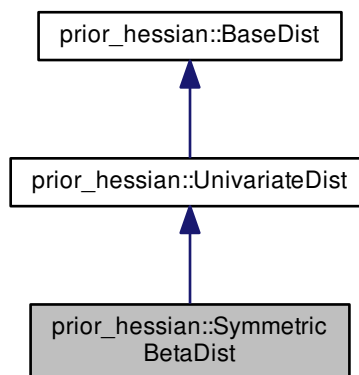

## Public Types

- using [NparamsVecT](#) = arma::Col< double >::fixed< \_num\_params >

## Public Member Functions

- [SymmetricBetaDist](#) ()
- [SymmetricBetaDist](#) (double [beta](#))
- template<class Vec , meta::ConstructableIfNotSelfT< Vec, SymmetricBetaDist > = true>  
[SymmetricBetaDist](#) (const Vec &[params](#))
- double [beta](#) () const
- void [set\\_beta](#) (double val)
- double [get\\_param](#) (int idx) const
- void [set\\_param](#) (int idx, double val)
- [NparamsVecT](#) [params](#) () const
- void [set\\_params](#) (double [beta](#))
- template<class Vec >  
void [set\\_params](#) (const Vec &p)
- bool [operator==](#) (const [SymmetricBetaDist](#) &o) const
- bool [operator!=](#) (const [SymmetricBetaDist](#) &o) const
- double [mean](#) () const
- double [median](#) () const
- double [cdf](#) (double x) const
- double [icdf](#) (double u) const
- double [pdf](#) (double x) const
- double [llh](#) (double x) const
- double [rllh](#) (double x) const
- double [grad](#) (double x) const
- double [grad2](#) (double x) const
- void [grad\\_grad2\\_accumulate](#) (double x, double &g, double &g2) const
- template<class RngT >  
double [sample](#) (RngT &rng) const
- template<class IterT >  
void [set\\_params\\_iter](#) (IterT &[params](#))

## Static Public Member Functions

- static constexpr [IdxT](#) [num\\_params](#) ()
- static constexpr double [lbound](#) ()
- static constexpr double [ubound](#) ()
- static bool [in\\_bounds](#) (double u)
- static const [StringVecT](#) & [param\\_names](#) ()
- static const [VecT](#) & [param\\_lbound](#) ()
- static const [VecT](#) & [param\\_ubound](#) ()
- static bool [check\\_params](#) (double [beta](#))
- template<class Vec >  
static bool [check\\_params](#) (Vec &p)
- template<class IterT >  
static bool [check\\_params\\_iter](#) (IterT &[params](#))
- static constexpr [IdxT](#) [num\\_dim](#) ()

## Static Protected Member Functions

- static void `check_bounds` (double `lbound`, double `ubound`)

### 7.62.1 Detailed Description

Single parameter beta distribution where  $\alpha = \beta$ , leading to symmetric bounded distribution.

Definition at line 22 of file `SymmetricBetaDist.h`.

### 7.62.2 Member Typedef Documentation

#### 7.62.2.1 `using prior_hessian::SymmetricBetaDist::NparamsVecT = arma::Col<double>::fixed<_num_params>`

Definition at line 26 of file `SymmetricBetaDist.h`.

### 7.62.3 Constructor & Destructor Documentation

#### 7.62.3.1 `prior_hessian::SymmetricBetaDist::SymmetricBetaDist ( ) [inline]`

Definition at line 42 of file `SymmetricBetaDist.h`.

#### 7.62.3.2 `prior_hessian::SymmetricBetaDist::SymmetricBetaDist ( double beta ) [explicit]`

Definition at line 23 of file `SymmetricBetaDist.cpp`.

#### 7.62.3.3 `template<class Vec , meta::ConstructableIfNotSelfT< Vec, SymmetricBetaDist > = true> prior_hessian::SymmetricBetaDist::SymmetricBetaDist ( const Vec & params ) [inline],[explicit]`

Definition at line 45 of file `SymmetricBetaDist.h`.

## 7.62.4 Member Function Documentation


## 7.62.4.1 double prior\_hessian::SymmetricBetaDist::beta ( ) const [inline]

Definition at line 47 of file SymmetricBetaDist.h.


References `get_param()`, `set_beta()`, and `set_param()`.

Referenced by `llh()`, `operator==()`, `param_ubound()`, and `params()`.

Here is the call graph for this function:

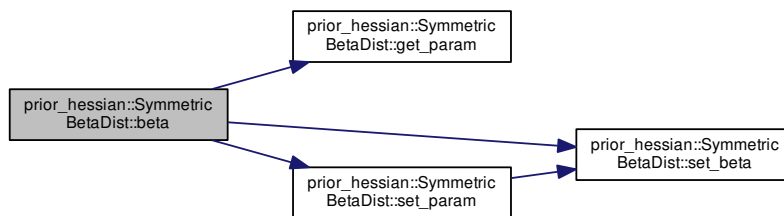

Here is the caller graph for this function:

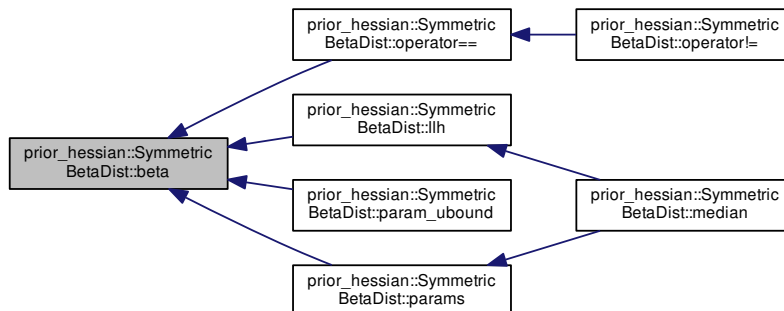


## 7.62.4.2 double prior\_hessian::SymmetricBetaDist::cdf ( double x ) const

Definition at line 36 of file SymmetricBetaDist.cpp.

Referenced by `median()`.



Here is the caller graph for this function:



**7.62.4.3** `void prior_hessian::UnivariateDist::check_bounds ( double lbound, double ubound )` [static],[protected],[inherited]

Definition at line 17 of file UnivariateDist.cpp.

Referenced by `prior_hessian::UnivariateDist::UnivariateDist()`.

Here is the caller graph for this function:




**7.62.4.4** `bool prior_hessian::SymmetricBetaDist::check_params ( double beta )` [inline],[static]

Definition at line 101 of file SymmetricBetaDist.h.

Referenced by `check_params_iter()`, and `param_ubound()`.

Here is the caller graph for this function:




7.62.4.5 `template<class Vec > static bool prior_hessian::SymmetricBetaDist::check_params ( Vec & p ) [inline], [static]`

Definition at line 40 of file SymmetricBetaDist.h.


References `check_params()`.

Referenced by `check_params()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.62.4.6 `template<class IterT > bool prior_hessian::SymmetricBetaDist::check_params_iter ( IterT & params ) [static]`

Definition at line 167 of file SymmetricBetaDist.h.

References `check_params()`.

Referenced by `median()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.62.4.7 `double prior_hessian::SymmetricBetaDist::get_param ( int idx ) const [inline]`

Definition at line 107 of file `SymmetricBetaDist.h`.

Referenced by `beta()`.

Here is the caller graph for this function:

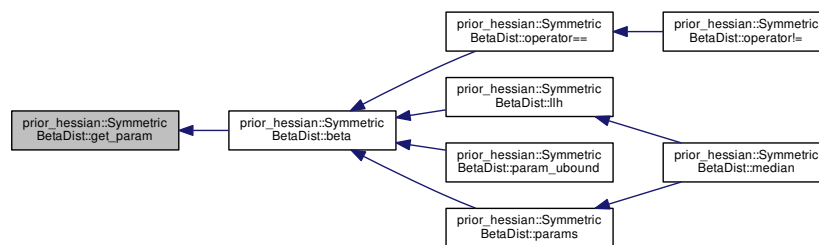

7.62.4.8 `double prior_hessian::SymmetricBetaDist::grad ( double x ) const` `[inline]`

Definition at line 137 of file SymmetricBetaDist.h.

Referenced by median().

Here is the caller graph for this function:




7.62.4.9 `double prior_hessian::SymmetricBetaDist::grad2 ( double x ) const` `[inline]`

Definition at line 143 of file SymmetricBetaDist.h.

References `prior_hessian::square()`.

Referenced by median().

Here is the call graph for this function:



Here is the caller graph for this function:



7.62.4.10 `void prior_hessian::SymmetricBetaDist::grad_grad2_accumulate ( double x, double & g, double & g2 ) const`  
`[inline]`

Definition at line 149 of file SymmetricBetaDist.h.

Referenced by `median()`.

Here is the caller graph for this function:



7.62.4.11 `double prior_hessian::SymmetricBetaDist::icdf ( double u ) const`

Definition at line 43 of file SymmetricBetaDist.cpp.

Referenced by `median()`, and `sample()`.

Here is the caller graph for this function:




7.62.4.12 `static bool prior_hessian::SymmetricBetaDist::in_bounds ( double u )` `[inline]`, `[static]`

Definition at line 32 of file SymmetricBetaDist.h.

References `lbound()`, and `ubound()`.

Here is the call graph for this function:

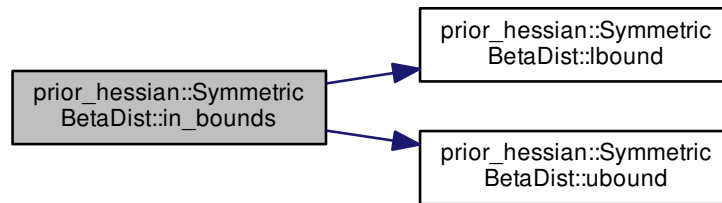


#### 7.62.4.13 `static constexpr double prior_hessian::SymmetricBetaDist::lbound ( ) [inline], [static]`

Definition at line 30 of file `SymmetricBetaDist.h`.

Referenced by `in_bounds()`.

Here is the caller graph for this function:




#### 7.62.4.14 `double prior_hessian::SymmetricBetaDist::llh ( double x ) const`

Definition at line 55 of file `SymmetricBetaDist.cpp`.


References `beta()`, and `rllh()`.

Referenced by `median()`.

Here is the call graph for this function:

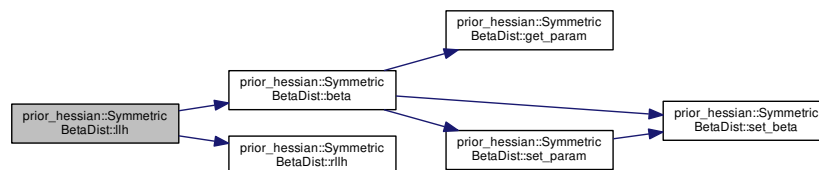

Here is the caller graph for this function:



**7.62.4.15** `double prior_hessian::SymmetricBetaDist::mean ( ) const [inline]`


Definition at line 60 of file `SymmetricBetaDist.h`.

**7.62.4.16** `double prior_hessian::SymmetricBetaDist::median ( ) const [inline]`

Definition at line 61 of file `SymmetricBetaDist.h`.

References `cdf()`, `check_params_iter()`, `grad()`, `grad2()`, `grad_grad2_accumulate()`, `icdf()`, `llh()`, `params()`, `pdf()`, `rllh()`, `sample()`, and `set_params_iter()`.

Here is the call graph for this function:

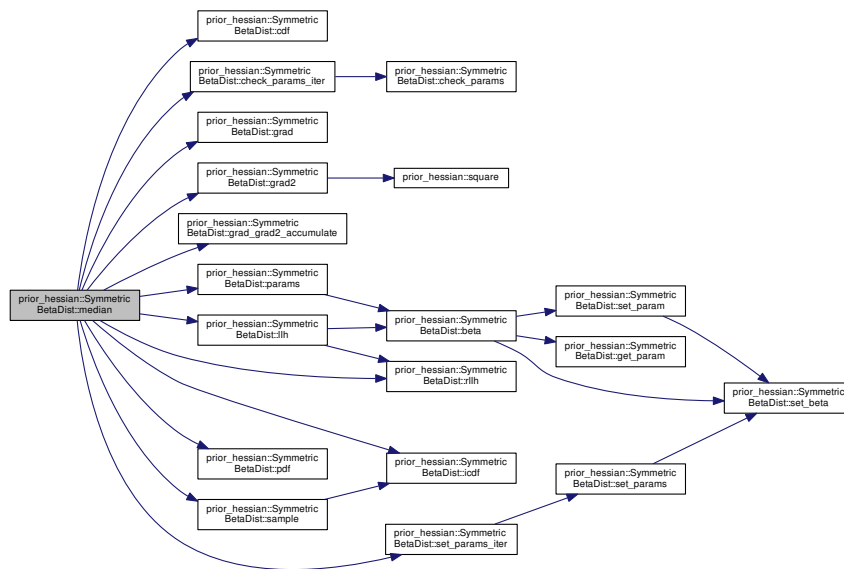

**7.62.4.17** `static constexpr IdxT prior_hessian::UnivariateDist::num_dim ( ) [inline],[static],[inherited]`

Definition at line 17 of file `UnivariateDist.h`.

7.62.4.18 `static constexpr IdxT prior_hessian::SymmetricBetaDist::num_params ( ) [inline],[static]`


Definition at line 29 of file SymmetricBetaDist.h.

7.62.4.19 `bool prior_hessian::SymmetricBetaDist::operator!=( const SymmetricBetaDist & o ) const [inline]`

Definition at line 58 of file SymmetricBetaDist.h.

References `operator==( )`.

Here is the call graph for this function:




7.62.4.20 `bool prior_hessian::SymmetricBetaDist::operator==( const SymmetricBetaDist & o ) const [inline]`

Definition at line 57 of file SymmetricBetaDist.h.

References `beta( )`.

Referenced by `operator!=( )`.

Here is the call graph for this function:

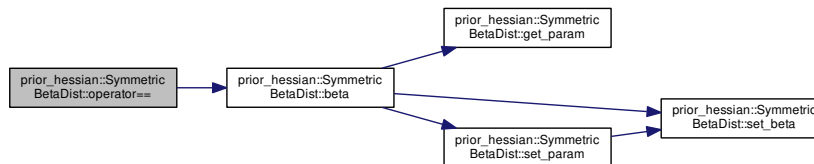

Here is the caller graph for this function:





7.62.4.21 `static const VecT& prior_hessian::SymmetricBetaDist::param_lbound ( ) [inline],[static]`

Definition at line 35 of file SymmetricBetaDist.h.

7.62.4.22 `static const StringVecT& prior_hessian::SymmetricBetaDist::param_names ( ) [inline],[static]`


Definition at line 34 of file SymmetricBetaDist.h.

7.62.4.23 `static const VecT& prior_hessian::SymmetricBetaDist::param_ubound ( ) [inline],[static]`

Definition at line 36 of file SymmetricBetaDist.h.

References `beta()`, and `check_params()`.

Here is the call graph for this function:

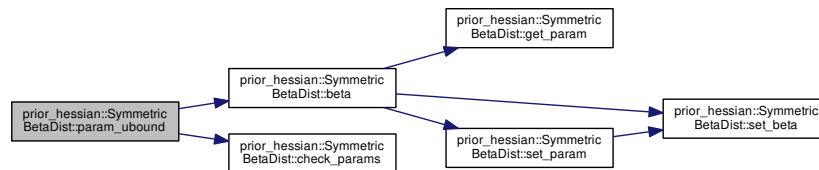


7.62.4.24 `NparamsVecT prior_hessian::SymmetricBetaDist::params ( ) const [inline]`

Definition at line 52 of file SymmetricBetaDist.h.


References `beta()`.

Referenced by `median()`.

Here is the call graph for this function:

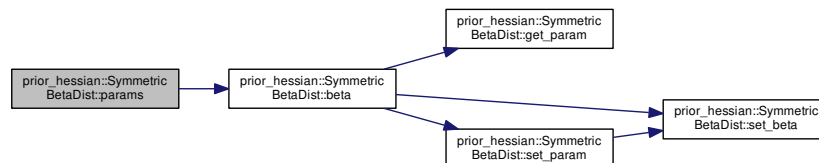

Here is the caller graph for this function:



#### 7.62.4.25 `double prior_hessian::SymmetricBetaDist::pdf ( double x ) const`

Definition at line 50 of file `SymmetricBetaDist.cpp`.

Referenced by `median()`.

Here is the caller graph for this function:




#### 7.62.4.26 `double prior_hessian::SymmetricBetaDist::rllh ( double x ) const [inline]`

Definition at line 131 of file `SymmetricBetaDist.h`.

Referenced by `llh()`, and `median()`.

Here is the caller graph for this function:






7.62.4.29 void prior\_hessian::SymmetricBetaDist::set\_param ( int *idx*, double *val* ) [inline]

Definition at line 119 of file SymmetricBetaDist.h.


References set\_beta().

Referenced by beta().

Here is the call graph for this function:



Here is the caller graph for this function:

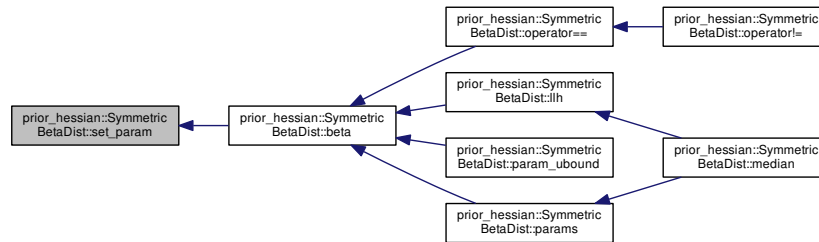

7.62.4.30 void prior\_hessian::SymmetricBetaDist::set\_params ( double *beta* ) [inline]

Definition at line 53 of file SymmetricBetaDist.h.


References set\_beta().

Referenced by set\_params\_iter().

Here is the call graph for this function:



Here is the caller graph for this function:



7.62.4.31 `template<class Vec > void prior_hessian::SymmetricBetaDist::set_params ( const Vec & p ) [inline]`

Definition at line 56 of file SymmetricBetaDist.h.

References `set_beta()`.

Here is the call graph for this function:




7.62.4.32 `template<class IterT > void prior_hessian::SymmetricBetaDist::set_params_iter ( IterT & params )`

Definition at line 173 of file SymmetricBetaDist.h.


References `set_params()`.

Referenced by `median()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.62.4.33 `static constexpr double prior_hessian::SymmetricBetaDist::ubound ( ) [inline],[static]`

Definition at line 31 of file `SymmetricBetaDist.h`.

Referenced by `in_bounds()`.

Here is the caller graph for this function:




The documentation for this class was generated from the following files:

- [SymmetricBetaDist.h](#)
- [SymmetricBetaDist.cpp](#)


## 7.63 prior\_hessian::TruncatedDist< Dist > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/↵  
TruncatedDist.h>
```

Inheritance diagram for `prior_hessian::TruncatedDist< Dist >`:



Collaboration diagram for `prior_hessian::TruncatedDist< Dist >`:



### Public Member Functions

- [TruncatedDist](#) ()
- [TruncatedDist](#) (double [lbound](#), double [ubound](#))
- `template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedDist>>`  
[TruncatedDist](#) (const [Dist](#) &dist)
- `template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedDist>>`  
[TruncatedDist](#) ([Dist](#) &&dist)
- [TruncatedDist](#) (const [Dist](#) &dist, double [lbound](#), double [ubound](#))
- [TruncatedDist](#) ([Dist](#) &&dist, double [lbound](#), double [ubound](#))
- double [lbound](#) () const
- double [ubound](#) () const
- bool [truncated](#) () const
- bool [operator==](#) (const [TruncatedDist](#)< [Dist](#) > &o) const
- bool [operator!=](#) (const [TruncatedDist](#)< [Dist](#) > &o) const
- void [set\\_bounds](#) (double [lbound](#), double [ubound](#))

- void [set\\_lbound](#) (double [lbound](#))
- void [set\\_ubound](#) (double [ubound](#))
- double [mean](#) () const
- double [median](#) () const
- double [cdf](#) (double x) const
- double [pdf](#) (double x) const
- double [icdf](#) (double u) const
- double [llh](#) (double x) const
- template<class RngT >  
double [sample](#) (RngT &rng) const

#### Static Public Member Functions

- static constexpr [IdxT num\\_params](#) ()
- static double [global\\_lbound](#) ()
- static double [global\\_ubound](#) ()

#### Static Public Attributes

- static constexpr const double [min\\_bounds\\_pdf\\_integral](#) = 1.0e-8

#### Protected Attributes

- double [\\_truncated\\_lbound](#)
- double [\\_truncated\\_ubound](#)
- bool [\\_truncated](#) = false
- double [lbound\\_cdf](#)
- double [bounds\\_pdf\\_integral](#)
- double [llh\\_truncation\\_const](#)

#### 7.63.1 Detailed Description

```
template<class Dist>  
class prior_hessian::TruncatedDist< Dist >
```

Definition at line 22 of file TruncatedDist.h.

#### 7.63.2 Constructor & Destructor Documentation

7.63.2.1 `template<class Dist> prior_hessian::TruncatedDist< Dist >::TruncatedDist ( ) [inline]`

Definition at line 30 of file TruncatedDist.h.




7.63.2.2 `template<class Dist> prior_hessian::TruncatedDist< Dist >::TruncatedDist ( double lbound, double ubound )`  
`[inline]`

Definition at line 31 of file `TruncatedDist.h`.

References `prior_hessian::TruncatedDist< Dist >::lbound()`, and `prior_hessian::TruncatedDist< Dist >::ubound()`.

Here is the call graph for this function:

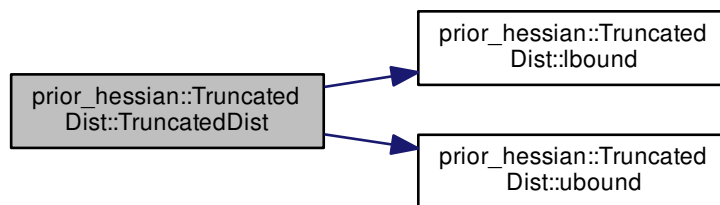

7.63.2.3 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedDist>>`  
`prior_hessian::TruncatedDist< Dist >::TruncatedDist ( const Dist & dist )` `[inline]`

Definition at line 34 of file `TruncatedDist.h`.

7.63.2.4 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedDist>>`  
`prior_hessian::TruncatedDist< Dist >::TruncatedDist ( Dist && dist )` `[inline]`


Definition at line 37 of file `TruncatedDist.h`.

7.63.2.5 `template<class Dist> prior_hessian::TruncatedDist< Dist >::TruncatedDist ( const Dist & dist, double lbound,`  
`double ubound )` `[inline]`

Definition at line 39 of file `TruncatedDist.h`.

References `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

Here is the call graph for this function:

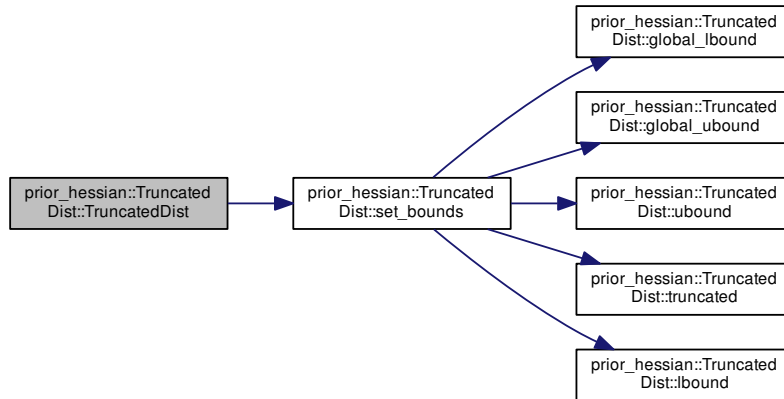


7.63.2.6 `template<class Dist> prior_hessian::TruncatedDist< Dist >::TruncatedDist ( Dist && dist, double lbound, double ubound ) [inline]`

Definition at line 43 of file `TruncatedDist.h`.

References `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

Here is the call graph for this function:

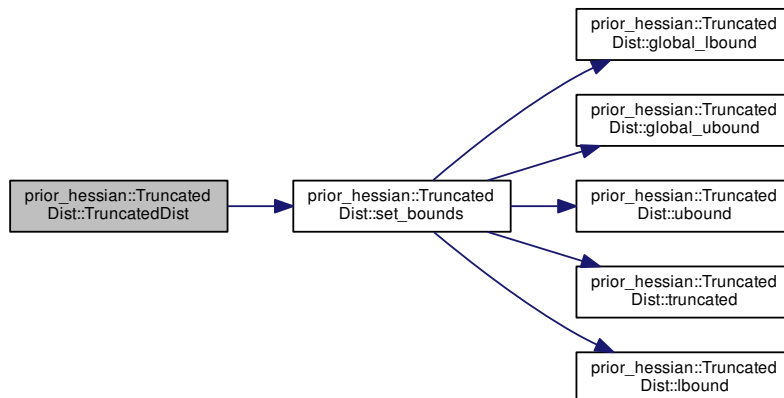

### 7.63.3 Member Function Documentation

#### 7.63.3.1 `template<class Dist > double prior_hessian::TruncatedDist< Dist >::cdf ( double x ) const`

Definition at line 135 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::bounds_pdf_integral`, and `prior_hessian::TruncatedDist< Dist >::lbound_cdf`.

Referenced by `prior_hessian::TruncatedDist< Dist >::median()`.

Here is the caller graph for this function:




#### 7.63.3.2 `template<class Dist> static double prior_hessian::TruncatedDist< Dist >::global_lbound ( ) [inline], [static]`

minimum allowable delta in cdf for a valid truncation

Definition at line 27 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

Here is the caller graph for this function:

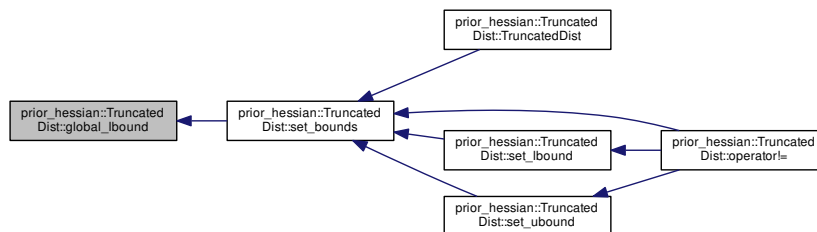


7.63.3.3 `template<class Dist> static double prior_hessian::TruncatedDist< Dist >::global_umbound ( ) [inline], [static]`

Definition at line 28 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

Here is the caller graph for this function:

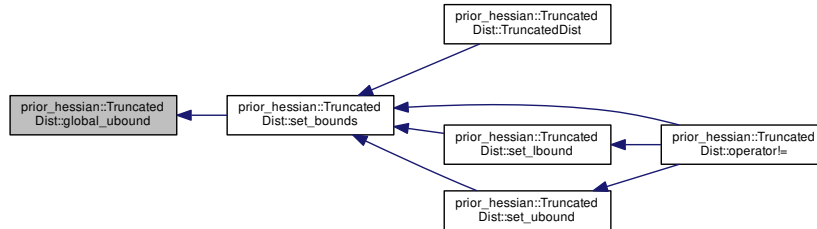


7.63.3.4 `template<class Dist> double prior_hessian::TruncatedDist< Dist >::icdf ( double u ) const`

Definition at line 141 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::bounds_pdf_integral`, and `prior_hessian::TruncatedDist< Dist >::lbound_cdf`.

Referenced by `prior_hessian::TruncatedDist< Dist >::median()`, and `prior_hessian::TruncatedDist< Dist >::sample()`.

Here is the caller graph for this function:




7.63.3.5 `template<class Dist> double prior_hessian::TruncatedDist< Dist >::lbound ( ) const [inline]`

Definition at line 47 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::_truncated_lbound`.

Referenced by `prior_hessian::TruncatedDist< Dist >::operator!=()`, `prior_hessian::TruncatedDist< Dist >::set_bounds()`, `prior_hessian::TruncatedDist< Dist >::set_umbound()`, and `prior_hessian::TruncatedDist< Dist >::TruncatedDist()`.

Here is the caller graph for this function:

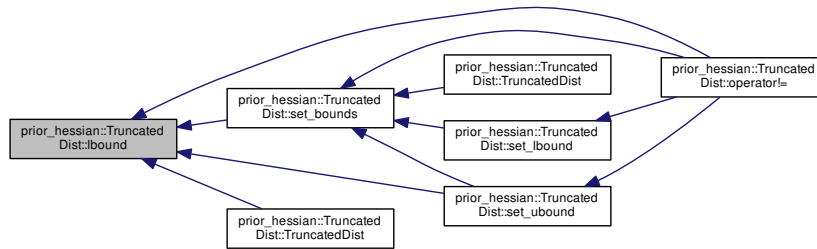

### 7.63.3.6 `template<class Dist > double prior_hessian::TruncatedDist< Dist >::llh ( double x ) const`

Definition at line 153 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::llh_truncation_const`.

Referenced by `prior_hessian::TruncatedDist< Dist >::median()`.

Here is the caller graph for this function:



### 7.63.3.7 `template<class Dist> double prior_hessian::TruncatedDist< Dist >::mean ( ) const` `[inline]`


Definition at line 62 of file TruncatedDist.h.

### 7.63.3.8 `template<class Dist> double prior_hessian::TruncatedDist< Dist >::median ( ) const` `[inline]`

Definition at line 63 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::bounds_pdf_integral`, `prior_hessian::TruncatedDist< Dist >::cdf()`, `prior_hessian::TruncatedDist< Dist >::icdf()`, `prior_hessian::TruncatedDist< Dist >::lbound_cdf`, `prior_hessian::TruncatedDist< Dist >::llh()`, `prior_hessian::TruncatedDist< Dist >::pdf()`, and `prior_hessian::TruncatedDist< Dist >::sample()`.

Here is the call graph for this function:

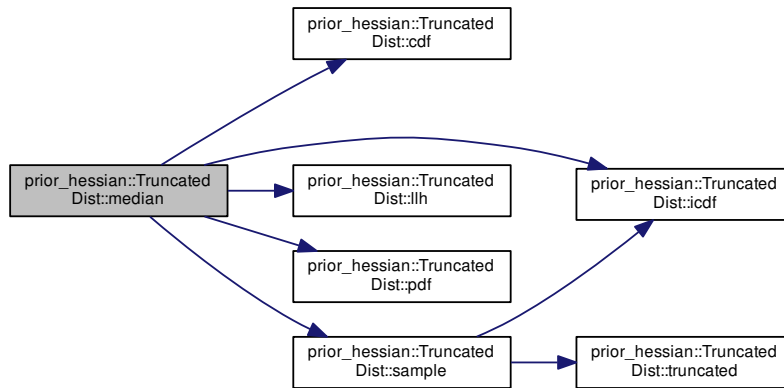

**7.63.3.9** `template<class Dist> static constexpr IdxT prior_hessian::TruncatedDist< Dist >::num_params ( )`  
`[inline],[static]`


Definition at line 25 of file TruncatedDist.h.

**7.63.3.10** `template<class Dist> bool prior_hessian::TruncatedDist< Dist >::operator!=( const TruncatedDist< Dist > & o ) const` `[inline]`

Definition at line 56 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::lbound()`, `prior_hessian::TruncatedDist< Dist >::operator==( )`, `prior_hessian::TruncatedDist< Dist >::set_bounds()`, `prior_hessian::TruncatedDist< Dist >::set_lbound()`, `prior_hessian::TruncatedDist< Dist >::set_ubound()`, and `prior_hessian::TruncatedDist< Dist >::ubound()`.

Here is the call graph for this function:

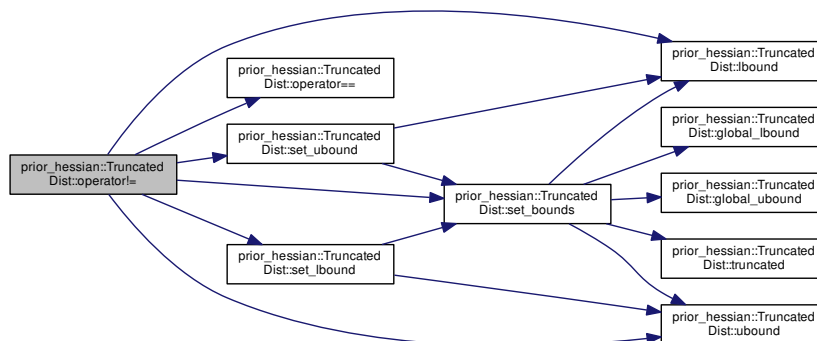

7.63.3.11 `template<class Dist> bool prior_hessian::TruncatedDist< Dist >::operator==( const TruncatedDist< Dist > & o ) const [inline]`

Definition at line 50 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::_truncated_lbound`, and `prior_hessian::TruncatedDist< Dist >::_truncated_ubound`.

Referenced by `prior_hessian::TruncatedDist< Dist >::operator!==( )`.

Here is the caller graph for this function:



7.63.3.12 `template<class Dist > double prior_hessian::TruncatedDist< Dist >::pdf( double x ) const`

Definition at line 147 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::bounds_pdf_integral`.

Referenced by `prior_hessian::TruncatedDist< Dist >::median( )`.

Here is the caller graph for this function:




7.63.3.13 `template<class Dist > template<class RngT > double prior_hessian::TruncatedDist< Dist >::sample ( RngT & rng ) const`

Definition at line 166 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::icdf()`, and `prior_hessian::TruncatedDist< Dist >::truncated()`.

Referenced by `prior_hessian::TruncatedDist< Dist >::median()`.

Here is the call graph for this function:

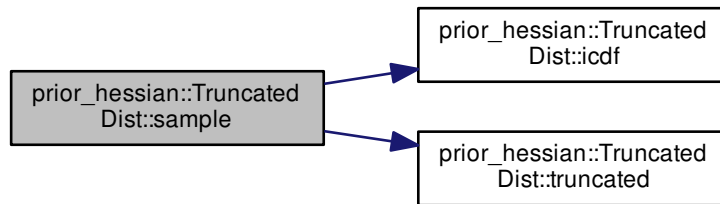

Here is the caller graph for this function:



7.63.3.14 `template<class Dist > void prior_hessian::TruncatedDist< Dist >::set_bounds ( double lbound, double ubound )`


Definition at line 82 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::_truncated`, `prior_hessian::TruncatedDist< Dist >::_truncated_lbound`, `prior_hessian::TruncatedDist< Dist >::_truncated_ubound`, `prior_hessian::TruncatedDist< Dist >::bounds_pdf_integral`, `prior_hessian::TruncatedDist< Dist >::global_lbound()`, `prior_hessian::TruncatedDist< Dist >::global_ubound()`, `prior_hessian::TruncatedDist< Dist >::lbound()`, `prior_hessian::TruncatedDist< Dist >::lbound_cdf`, `prior_hessian::TruncatedDist< Dist >::llh_truncation_const`, `prior_hessian::TruncatedDist< Dist >::min_bounds_pdf_integral`, `prior_hessian::TruncatedDist< Dist >::truncated()`, and `prior_hessian::TruncatedDist< Dist >::ubound()`.


Referenced by `prior_hessian::TruncatedDist< Dist >::operator!=()`, `prior_hessian::TruncatedDist< Dist >::set_lbound()`, `prior_hessian::TruncatedDist< Dist >::set_ubound()`, and `prior_hessian::TruncatedDist< Dist >::TruncatedDist()`.



Here is the call graph for this function:

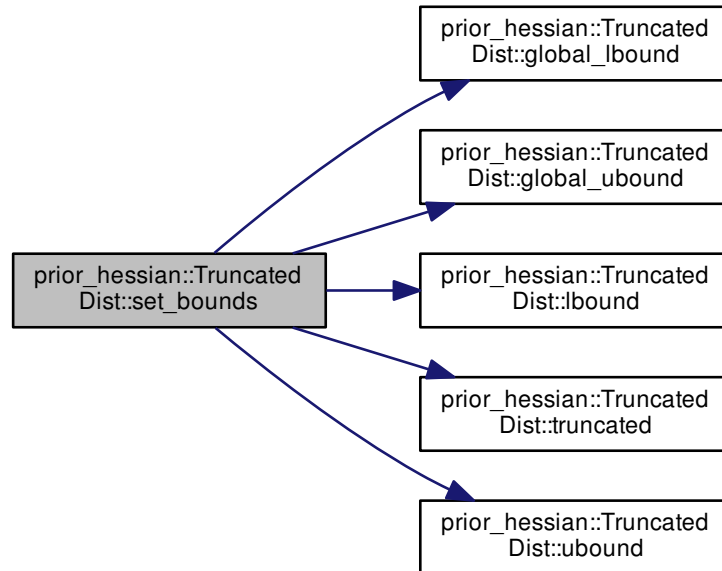

Here is the caller graph for this function:

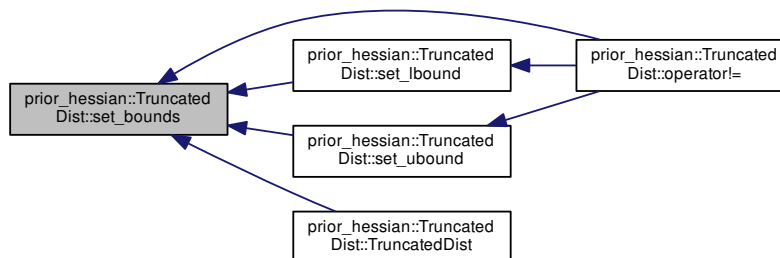


**7.63.3.15** `template<class Dist > void prior_hessian::TruncatedDist< Dist >::set_lbound ( double lbound )`

Definition at line 123 of file `TruncatedDist.h`.

References `prior_hessian::TruncatedDist< Dist >::set_bounds()`, and `prior_hessian::TruncatedDist< Dist >::ubound()`.

Referenced by `prior_hessian::TruncatedDist< Dist >::operator!=()`.

Here is the call graph for this function:

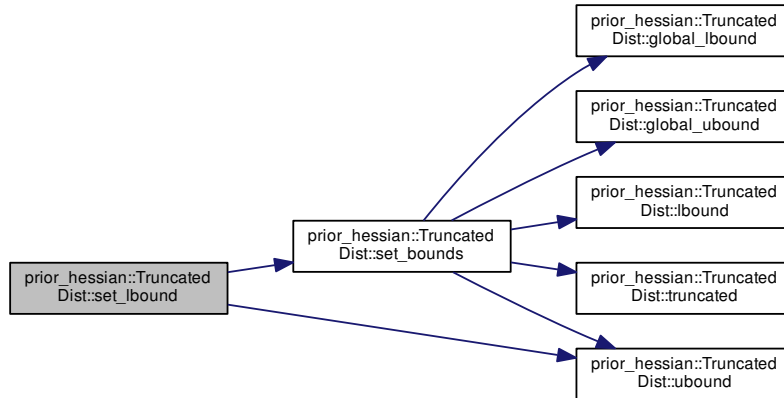

Here is the caller graph for this function:




7.63.3.16 `template<class Dist > void prior_hessian::TruncatedDist< Dist >::set_ubound ( double ubound )`

Definition at line 129 of file `TruncatedDist.h`.

References `prior_hessian::TruncatedDist< Dist >::lbound()`, and `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

Referenced by `prior_hessian::TruncatedDist< Dist >::operator!=()`.

Here is the call graph for this function:

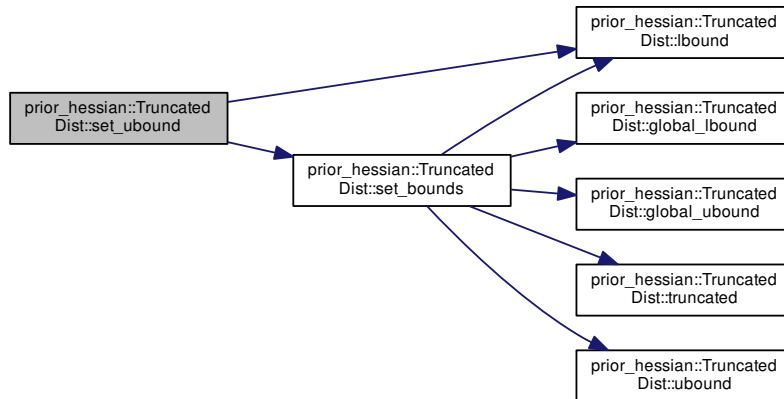

Here is the caller graph for this function:




7.63.3.17 `template<class Dist> bool prior_hessian::TruncatedDist< Dist >::truncated ( ) const [inline]`

Definition at line 49 of file `TruncatedDist.h`.

References `prior_hessian::TruncatedDist< Dist >::_truncated`.

Referenced by `prior_hessian::TruncatedDist< Dist >::sample()`, and `prior_hessian::TruncatedDist< Dist >::set_↔ bounds()`.

Here is the caller graph for this function:

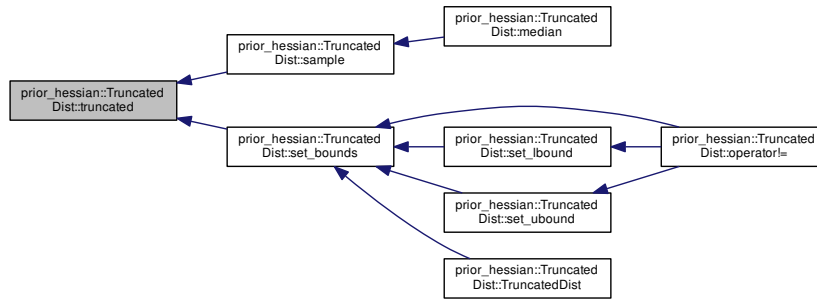


7.63.3.18 `template<class Dist> double prior_hessian::TruncatedDist< Dist >::ubound ( ) const [inline]`

Definition at line 48 of file TruncatedDist.h.

References `prior_hessian::TruncatedDist< Dist >::_truncated_ubound`.

Referenced by `prior_hessian::TruncatedDist< Dist >::operator!=()`, `prior_hessian::TruncatedDist< Dist >::set_lbound()`, `prior_hessian::TruncatedDist< Dist >::set_ubound()`, and `prior_hessian::TruncatedDist< Dist >::TruncatedDist()`.

Here is the caller graph for this function:

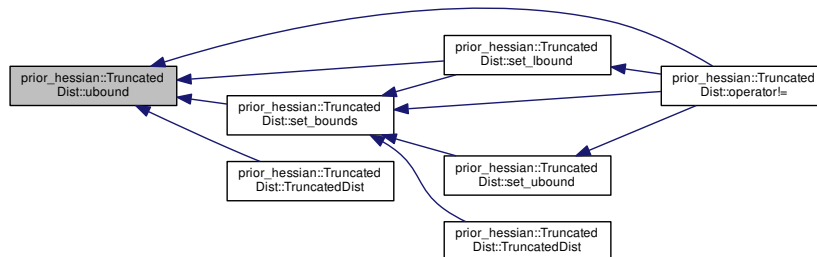

## 7.63.4 Member Data Documentation

7.63.4.1 `template<class Dist> bool prior_hessian::TruncatedDist< Dist >::_truncated = false [protected]`

Definition at line 74 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::set_bounds()`, and `prior_hessian::TruncatedDist< Dist >::truncated()`.

**7.63.4.2** `template<class Dist> double prior_hessian::TruncatedDist< Dist >::_truncated_lbound` [protected]

Definition at line 72 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::lbound()`, `prior_hessian::TruncatedDist< Dist >::operator==()`, and `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

**7.63.4.3** `template<class Dist> double prior_hessian::TruncatedDist< Dist >::_truncated_ubound` [protected]

Definition at line 73 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::operator==()`, `prior_hessian::TruncatedDist< Dist >::set_← bounds()`, and `prior_hessian::TruncatedDist< Dist >::ubound()`.

**7.63.4.4** `template<class Dist> double prior_hessian::TruncatedDist< Dist >::bounds_pdf_integral` [protected]

Definition at line 77 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::cdf()`, `prior_hessian::TruncatedDist< Dist >::icdf()`, `prior_← _hessian::TruncatedDist< Dist >::median()`, `prior_hessian::TruncatedDist< Dist >::pdf()`, and `prior_hessian::← TruncatedDist< Dist >::set_bounds()`.

**7.63.4.5** `template<class Dist> double prior_hessian::TruncatedDist< Dist >::lbound_cdf` [protected]

Definition at line 76 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::cdf()`, `prior_hessian::TruncatedDist< Dist >::icdf()`, `prior_← hessian::TruncatedDist< Dist >::median()`, and `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

**7.63.4.6** `template<class Dist> double prior_hessian::TruncatedDist< Dist >::llh_truncation_const` [protected]

Definition at line 78 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::llh()`, and `prior_hessian::TruncatedDist< Dist >::set_bounds()`.

**7.63.4.7** `template<class Dist> constexpr const double prior_hessian::TruncatedDist< Dist >::min_bounds_pdf_integral = 1.0e-8` [static]

Definition at line 26 of file TruncatedDist.h.

Referenced by `prior_hessian::TruncatedDist< Dist >::set_bounds()`.


The documentation for this class was generated from the following file:

- [TruncatedDist.h](#)


## 7.64 prior\_hessian::TruncatedMultivariateDist&lt; Dist &gt; Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
TruncatedMultivariateDist.h>
```

Inheritance diagram for prior\_hessian::TruncatedMultivariateDist< Dist >:



Collaboration diagram for prior\_hessian::TruncatedMultivariateDist< Dist >:



#### Public Member Functions

- [TruncatedMultivariateDist](#) ()
- `template<class Vec >`  
[TruncatedMultivariateDist](#) (Vec &&lbound, Vec &&ubound)
- `template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedMultivariateDist>>`  
[TruncatedMultivariateDist](#) (const Dist &dist)
- `template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedMultivariateDist>>`  
[TruncatedMultivariateDist](#) (Dist &&dist)
- `template<class Vec >`  
[TruncatedMultivariateDist](#) (const Dist &dist, Vec &&lbound, Vec &&ubound)

- `template<class Vec >`  
`TruncatedMultivariateDist` (`Dist &&dist`, `Vec &&lbound`, `Vec &&ubound`)
- `const NdimVecT & lbound` () const
- `const NdimVecT & ubound` () const
- `template<class Vec >`  
`bool in_bounds` (`const Vec &u`) const
- `bool truncated` () const
- `bool operator==` (`const TruncatedMultivariateDist< Dist > &o`) const
- `bool operator!=` (`const TruncatedMultivariateDist< Dist > &o`) const
- `template<class Vec , class Vec2 >`  
`void set_bounds` (`const Vec &lbound`, `const Vec2 &ubound`)
- `template<class Vec >`  
`void set_lbound` (`const Vec &lbound`)
- `template<class Vec >`  
`void set_ubound` (`const Vec &ubound`)
- `double mean` () const
- `template<class Vec >`  
`double cdf` (`const Vec &x`) const
- `template<class Vec >`  
`double pdf` (`const Vec &x`) const
- `template<class Vec >`  
`double llh` (`const Vec &x`) const
- `template<class RngT >`  
`NdimVecT sample` (`RngT &rng`) const

#### Static Public Member Functions

- `static const NdimVecT & global_lbound` ()
- `static const NdimVecT & global_ubound` ()

#### Static Public Attributes

- `static constexpr const double min_bounds_pdf_integral` = 1.0e-8

#### Protected Member Functions

- `double compute_truncated_pdf_integral` (`const NdimVecT &lbound`, `const NdimVecT &ubound`, `double lbound←_cdf`) const

#### Protected Attributes

- `NdimVecT _truncated_lbound`
- `NdimVecT _truncated_ubound`
- `bool _truncated` = false
- `double lbound_cdf`
- `double bounds_pdf_integral`
- `double llh_truncation_const`

## 7.64.1 Detailed Description

```
template<class Dist>
class prior_hessian::TruncatedMultivariateDist< Dist >
```

Definition at line 60 of file TruncatedMultivariateDist.h.

## 7.64.2 Constructor &amp; Destructor Documentation

7.64.2.1 `template<class Dist> prior_hessian::TruncatedMultivariateDist< Dist >::TruncatedMultivariateDist ( )` `[inline]`

minimum allowabale integral of pdf for a valid truncation

Definition at line 66 of file TruncatedMultivariateDist.h.

7.64.2.2 `template<class Dist> template<class Vec > prior_hessian::TruncatedMultivariateDist< Dist >::TruncatedMultivariateDist ( Vec && lbound, Vec && ubound )` `[inline]`

Definition at line 69 of file TruncatedMultivariateDist.h.

7.64.2.3 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedMultivariateDist>> prior_hessian::TruncatedMultivariateDist< Dist >::TruncatedMultivariateDist ( const Dist & dist )` `[inline]`

Definition at line 73 of file TruncatedMultivariateDist.h.

7.64.2.4 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,TruncatedMultivariateDist>> prior_hessian::TruncatedMultivariateDist< Dist >::TruncatedMultivariateDist ( Dist && dist )` `[inline]`

Definition at line 76 of file TruncatedMultivariateDist.h.

7.64.2.5 `template<class Dist> template<class Vec > prior_hessian::TruncatedMultivariateDist< Dist >::TruncatedMultivariateDist ( const Dist & dist, Vec && lbound, Vec && ubound )` `[inline]`

Definition at line 79 of file TruncatedMultivariateDist.h.

7.64.2.6 `template<class Dist> template<class Vec > prior_hessian::TruncatedMultivariateDist< Dist >::TruncatedMultivariateDist ( Dist && dist, Vec && lbound, Vec && ubound )` `[inline]`

Definition at line 86 of file TruncatedMultivariateDist.h.

## 7.64.3 Member Function Documentation

7.64.3.1 `template<class Dist > template<class Vec > double prior_hessian::TruncatedMultivariateDist< Dist >::cdf ( const Vec & x ) const`

Definition at line 233 of file TruncatedMultivariateDist.h.



7.64.3.2 `template<class Dist > double prior_hessian::TruncatedMultivariateDist< Dist >::compute_truncated_pdf_integral ( const NdimVecT & lbound, const NdimVecT & ubound, double lbound_cdf ) const` [protected]

Definition at line 147 of file TruncatedMultivariateDist.h.

7.64.3.3 `template<class Dist> static const NdimVecT& prior_hessian::TruncatedMultivariateDist< Dist >::global_lbound ( )` [inline],[static]

Definition at line 96 of file TruncatedMultivariateDist.h.

7.64.3.4 `template<class Dist> static const NdimVecT& prior_hessian::TruncatedMultivariateDist< Dist >::global_ubound ( )` [inline],[static]

Definition at line 97 of file TruncatedMultivariateDist.h.

7.64.3.5 `template<class Dist> template<class Vec > bool prior_hessian::TruncatedMultivariateDist< Dist >::in_bounds ( const Vec & u ) const` [inline]

Definition at line 95 of file TruncatedMultivariateDist.h.

7.64.3.6 `template<class Dist> const NdimVecT& prior_hessian::TruncatedMultivariateDist< Dist >::lbound ( ) const` [inline]

Definition at line 92 of file TruncatedMultivariateDist.h.

7.64.3.7 `template<class Dist > template<class Vec > double prior_hessian::TruncatedMultivariateDist< Dist >::llh ( const Vec & x ) const`

Definition at line 248 of file TruncatedMultivariateDist.h.

7.64.3.8 `template<class Dist> double prior_hessian::TruncatedMultivariateDist< Dist >::mean ( ) const` [inline]

Definition at line 114 of file TruncatedMultivariateDist.h.

References `prior_hessian::mcmc::MCMCData< Ndim >::sample`.

7.64.3.9 `template<class Dist> bool prior_hessian::TruncatedMultivariateDist< Dist >::operator!= ( const TruncatedMultivariateDist< Dist > & o ) const` [inline]

Definition at line 105 of file TruncatedMultivariateDist.h.

7.64.3.10 `template<class Dist> bool prior_hessian::TruncatedMultivariateDist< Dist >::operator==( const TruncatedMultivariateDist< Dist > & o ) const` [inline]

Definition at line 99 of file TruncatedMultivariateDist.h.

References `prior_hessian::TruncatedMultivariateDist< Dist >::_truncated_lbound`, and `prior_hessian::TruncatedMultivariateDist< Dist >::_truncated_ubound`.

7.64.3.11 `template<class Dist > template<class Vec > double prior_hessian::TruncatedMultivariateDist< Dist >::pdf ( const Vec & x ) const`

Definition at line 241 of file TruncatedMultivariateDist.h.

7.64.3.12 `template<class Dist > template<class RngT > TruncatedMultivariateDist< Dist >::NdimVecT prior_hessian::TruncatedMultivariateDist< Dist >::sample ( RngT & rng ) const`

Definition at line 256 of file TruncatedMultivariateDist.h.

References `prior_hessian::mcmc::MCMCData< Ndim >::rllh`, and `prior_hessian::mcmc::MCMCData< Ndim >::sample`.

7.64.3.13 `template<class Dist > template<class Vec , class Vec2 > void prior_hessian::TruncatedMultivariateDist< Dist >::set_bounds ( const Vec & lbound, const Vec2 & ubound )`

Definition at line 179 of file TruncatedMultivariateDist.h.

7.64.3.14 `template<class Dist > template<class Vec > void prior_hessian::TruncatedMultivariateDist< Dist >::set_lbound ( const Vec & lbound )`

Definition at line 219 of file TruncatedMultivariateDist.h.

7.64.3.15 `template<class Dist > template<class Vec > void prior_hessian::TruncatedMultivariateDist< Dist >::set_ubound ( const Vec & ubound )`

Definition at line 226 of file TruncatedMultivariateDist.h.

7.64.3.16 `template<class Dist> bool prior_hessian::TruncatedMultivariateDist< Dist >::truncated ( ) const [inline]`

Definition at line 98 of file TruncatedMultivariateDist.h.

7.64.3.17 `template<class Dist> const NdimVecT& prior_hessian::TruncatedMultivariateDist< Dist >::ubound ( ) const [inline]`

Definition at line 93 of file TruncatedMultivariateDist.h.

#### 7.64.4 Member Data Documentation

7.64.4.1 `template<class Dist> bool prior_hessian::TruncatedMultivariateDist< Dist >::_truncated = false [protected]`

Definition at line 128 of file TruncatedMultivariateDist.h.

7.64.4.2 `template<class Dist> NdimVecT prior_hessian::TruncatedMultivariateDist< Dist >::_truncated_lbound`  
[protected]

Definition at line 126 of file TruncatedMultivariateDist.h.

Referenced by `prior_hessian::TruncatedMultivariateDist< Dist >::operator==(())`.

7.64.4.3 `template<class Dist> NdimVecT prior_hessian::TruncatedMultivariateDist< Dist >::_truncated_ubound`  
[protected]

Definition at line 127 of file TruncatedMultivariateDist.h.

Referenced by `prior_hessian::TruncatedMultivariateDist< Dist >::operator==(())`.

7.64.4.4 `template<class Dist> double prior_hessian::TruncatedMultivariateDist< Dist >::bounds_pdf_integral`  
[protected]

Definition at line 132 of file TruncatedMultivariateDist.h.

7.64.4.5 `template<class Dist> double prior_hessian::TruncatedMultivariateDist< Dist >::lbound_cdf` [protected]

Definition at line 131 of file TruncatedMultivariateDist.h.

7.64.4.6 `template<class Dist> double prior_hessian::TruncatedMultivariateDist< Dist >::llh_truncation_const`  
[protected]

Definition at line 133 of file TruncatedMultivariateDist.h.

7.64.4.7 `template<class Dist> constexpr const double prior_hessian::TruncatedMultivariateDist< Dist`  
`>::min_bounds_pdf_integral = 1.0e-8` [static]

Definition at line 64 of file TruncatedMultivariateDist.h.


The documentation for this class was generated from the following file:

- [TruncatedMultivariateDist.h](#)


## 7.65 prior\_hessian::UnivariateDist Class Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←
UnivariateDist.h>
```

Inheritance diagram for prior\_hessian::UnivariateDist:

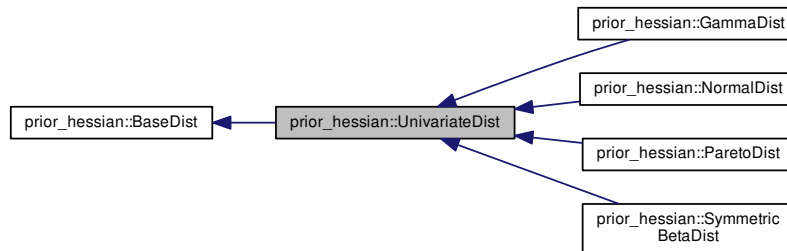

Collaboration diagram for prior\_hessian::UnivariateDist:

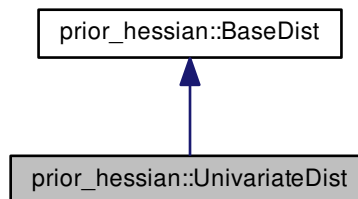

#### Public Member Functions

- [UnivariateDist](#) ()

#### Static Public Member Functions

- static constexpr [IdxT num\\_dim](#) ()

#### Static Protected Member Functions

- static void [check\\_bounds](#) (double lbound, double ubound)

### 7.65.1 Detailed Description

Definition at line 15 of file UnivariateDist.h.

### 7.65.2 Constructor & Destructor Documentation

#### 7.65.2.1 `prior_hessian::UnivariateDist::UnivariateDist ( )` `[inline]`

Definition at line 19 of file UnivariateDist.h.

References `check_bounds()`.

Here is the call graph for this function:



### 7.65.3 Member Function Documentation

#### 7.65.3.1 `void prior_hessian::UnivariateDist::check_bounds ( double lbound, double ubound )` `[static]`, `[protected]`

Definition at line 17 of file UnivariateDist.cpp.

Referenced by `UnivariateDist()`.

Here is the caller graph for this function:



7.65.3.2 static constexpr IdxT prior\_hessian::UnivariateDist::num\_dim ( ) [inline],[static]

Definition at line 17 of file UnivariateDist.h.


The documentation for this class was generated from the following files:

- [UnivariateDist.h](#)
- [UnivariateDist.cpp](#)


## 7.66 prior\_hessian::UpperTruncatedDist< Dist > Class Template Reference

```
#include </home/travis/build/markjolah/PriorHessian/include/PriorHessian/←  
UpperTruncatedDist.h>
```

Inheritance diagram for prior\_hessian::UpperTruncatedDist< Dist >:

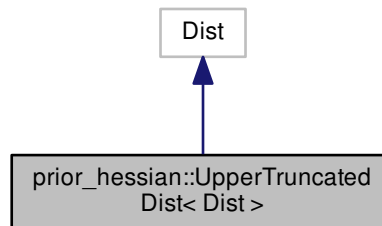

Collaboration diagram for prior\_hessian::UpperTruncatedDist< Dist >:

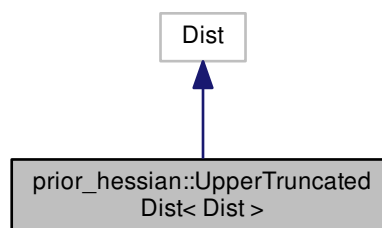

## Public Member Functions

- [UpperTruncatedDist](#) ()
- [UpperTruncatedDist](#) (double [ubound](#))
- `template<typename = meta::EnableIfNotIsSelfT<Dist,UpperTruncatedDist>>`  
[UpperTruncatedDist](#) (const Dist &dist)
- `template<typename = meta::EnableIfNotIsSelfT<Dist,UpperTruncatedDist>>`  
[UpperTruncatedDist](#) (Dist &&dist)
- [UpperTruncatedDist](#) (const Dist &dist, double [ubound](#))
- [UpperTruncatedDist](#) (Dist &&dist, double [ubound](#))
- double [ubound](#) () const
- bool [truncated](#) () const
- bool [operator==](#) (const [UpperTruncatedDist](#)< Dist > &o) const
- bool [operator!=](#) (const [UpperTruncatedDist](#)< Dist > &o) const
- void [set\\_bounds](#) (double lbound, double [ubound](#))
- void [set\\_lbound](#) (double [ubound](#))
- void [set\\_ubound](#) (double [ubound](#))
- double [mean](#) () const
- double [median](#) () const
- double [cdf](#) (double x) const
- double [pdf](#) (double x) const
- double [icdf](#) (double u) const
- double [llh](#) (double x) const
- `template<class RngT >`  
double [sample](#) (RngT &rng) const

## Static Public Member Functions

- static double [global\\_ubound](#) ()

### 7.66.1 Detailed Description

```
template<class Dist>
class prior_hessian::UpperTruncatedDist< Dist >
```

Definition at line 22 of file UpperTruncatedDist.h.

### 7.66.2 Constructor & Destructor Documentation

7.66.2.1 `template<class Dist> prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist( )` `[inline]`

Definition at line 25 of file UpperTruncatedDist.h.

7.66.2.2 `template<class Dist> prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist ( double ubound )`  
`[inline],[explicit]`

Definition at line 26 of file UpperTruncatedDist.h.

References `prior_hessian::UpperTruncatedDist< Dist >::ubound()`.

Here is the call graph for this function:



7.66.2.3 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,UpperTruncatedDist>>`  
`prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist ( const Dist & dist )` `[inline]`

Definition at line 29 of file UpperTruncatedDist.h.

7.66.2.4 `template<class Dist> template<typename = meta::EnableIfNotIsSelfT<Dist,UpperTruncatedDist>>`  
`prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist ( Dist && dist )` `[inline]`


Definition at line 32 of file UpperTruncatedDist.h.

7.66.2.5 `template<class Dist> prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist ( const Dist & dist,`  
`double ubound )` `[inline]`

Definition at line 34 of file UpperTruncatedDist.h.

References `prior_hessian::UpperTruncatedDist< Dist >::set_ubound()`.

Here is the call graph for this function:






### 7.66.2.6 `template<class Dist> prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist ( Dist && dist, double ubound ) [inline]`

Definition at line 35 of file UpperTruncatedDist.h.

References `prior_hessian::UpperTruncatedDist< Dist >::set_ubound()`.

Here is the call graph for this function:



## 7.66.3 Member Function Documentation

### 7.66.3.1 `template<class Dist > double prior_hessian::UpperTruncatedDist< Dist >::cdf ( double x ) const`

Definition at line 141 of file UpperTruncatedDist.h.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::median()`.

Here is the caller graph for this function:




### 7.66.3.2 `template<class Dist> static double prior_hessian::UpperTruncatedDist< Dist >::global_ubound ( ) [inline],[static]`

Definition at line 38 of file UpperTruncatedDist.h.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::set_bounds()`, and `prior_hessian::UpperTruncatedDist< Dist >::set_ubound()`.

Here is the caller graph for this function:




7.66.3.3 `template<class Dist > double prior_hessian::UpperTruncatedDist< Dist >::icdf ( double u ) const`

Definition at line 147 of file UpperTruncatedDist.h.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::median()`, and `prior_hessian::UpperTruncatedDist< Dist >::sample()`.

Here is the caller graph for this function:

7.66.3.4 `template<class Dist > double prior_hessian::UpperTruncatedDist< Dist >::llh ( double x ) const`

Definition at line 159 of file UpperTruncatedDist.h.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::median()`.

Here is the caller graph for this function:

7.66.3.5 `template<class Dist> double prior_hessian::UpperTruncatedDist< Dist >::mean ( ) const [inline]`


Definition at line 52 of file UpperTruncatedDist.h.

7.66.3.6 `template<class Dist> double prior_hessian::UpperTruncatedDist< Dist >::median ( ) const [inline]`

Definition at line 53 of file UpperTruncatedDist.h.

References `prior_hessian::UpperTruncatedDist< Dist >::cdf()`, `prior_hessian::UpperTruncatedDist< Dist >::icdf()`, `prior_hessian::UpperTruncatedDist< Dist >::llh()`, `prior_hessian::UpperTruncatedDist< Dist >::pdf()`, and `prior_hessian::UpperTruncatedDist< Dist >::sample()`.

Here is the call graph for this function:

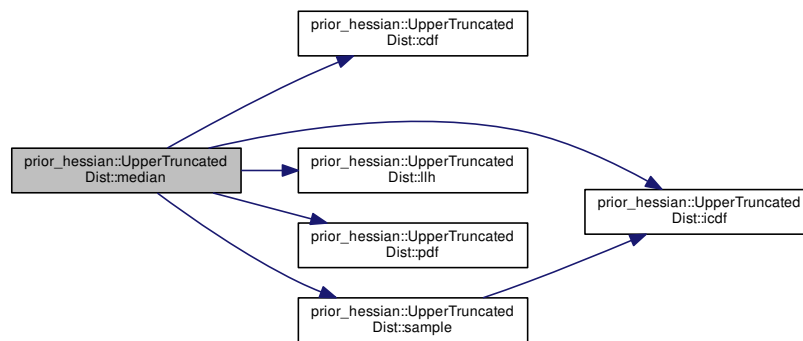


**7.66.3.7** `template<class Dist> bool prior_hessian::UpperTruncatedDist< Dist >::operator!=( const UpperTruncatedDist< Dist > & o ) const [inline]`

Definition at line 46 of file UpperTruncatedDist.h.

References `prior_hessian::UpperTruncatedDist< Dist >::operator==( )`, `prior_hessian::UpperTruncatedDist< Dist >::set_bounds( )`, `prior_hessian::UpperTruncatedDist< Dist >::set_lbound( )`, `prior_hessian::UpperTruncatedDist< Dist >::set_ubound( )`, and `prior_hessian::UpperTruncatedDist< Dist >::ubound( )`.

Here is the call graph for this function:

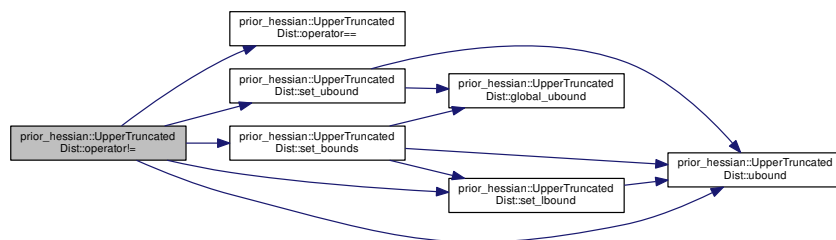


**7.66.3.8** `template<class Dist> bool prior_hessian::UpperTruncatedDist< Dist >::operator==( const UpperTruncatedDist< Dist > & o ) const [inline]`

Definition at line 40 of file UpperTruncatedDist.h.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::operator!=( )`.

Here is the caller graph for this function:



### 7.66.3.9 `template<class Dist > double prior_hessian::UpperTruncatedDist< Dist >::pdf ( double x ) const`

Definition at line 153 of file UpperTruncatedDist.h.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::median()`.

Here is the caller graph for this function:




### 7.66.3.10 `template<class Dist > template<class RngT > double prior_hessian::UpperTruncatedDist< Dist >::sample ( RngT & rng ) const`

Definition at line 166 of file UpperTruncatedDist.h.


References `prior_hessian::UpperTruncatedDist< Dist >::icdf()`.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::median()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.66.3.11 `template<class Dist > void prior_hessian::UpperTruncatedDist< Dist >::set_bounds ( double lbound, double ubound )`

Definition at line 73 of file `UpperTruncatedDist.h`.

References `prior_hessian::UpperTruncatedDist< Dist >::global_ubound()`, `prior_hessian::UpperTruncatedDist< Dist >::set_lbound()`, and `prior_hessian::UpperTruncatedDist< Dist >::ubound()`.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::operator!==( )`.

Here is the call graph for this function:

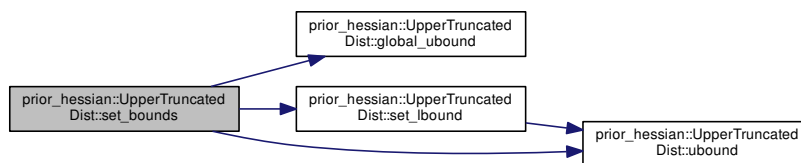

Here is the caller graph for this function:



7.66.3.12 `template<class Dist > void prior_hessian::UpperTruncatedDist< Dist >::set_lbound ( double ubound )`

Definition at line 95 of file UpperTruncatedDist.h.


References `prior_hessian::UpperTruncatedDist< Dist >::ubound()`.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::operator!==( )`, and `prior_hessian::UpperTruncatedDist< Dist >::set_bounds()`.

Here is the call graph for this function:



Here is the caller graph for this function:


7.66.3.13 `template<class Dist > void prior_hessian::UpperTruncatedDist< Dist >::set_ubound ( double ubound )`

Definition at line 111 of file UpperTruncatedDist.h.


References `prior_hessian::UpperTruncatedDist< Dist >::global_ubound()`, and `prior_hessian::UpperTruncatedDist< Dist >::ubound()`.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::operator!==( )`, and `prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist()`.

Here is the call graph for this function:

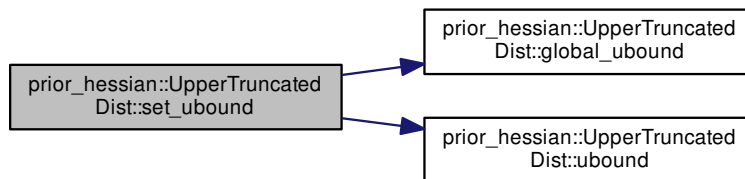

Here is the caller graph for this function:

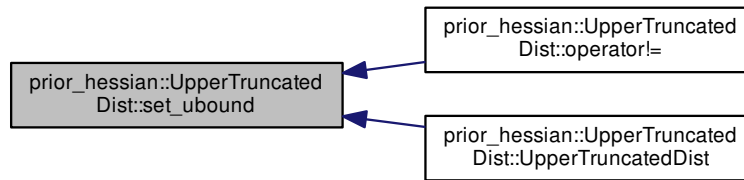

7.66.3.14 `template<class Dist> bool prior_hessian::UpperTruncatedDist< Dist >::truncated ( ) const [inline]`


Definition at line 39 of file `UpperTruncatedDist.h`.

7.66.3.15 `template<class Dist> double prior_hessian::UpperTruncatedDist< Dist >::ubound ( ) const [inline]`

Definition at line 37 of file `UpperTruncatedDist.h`.

Referenced by `prior_hessian::UpperTruncatedDist< Dist >::operator!=()`, `prior_hessian::UpperTruncatedDist< Dist >::set_bounds()`, `prior_hessian::UpperTruncatedDist< Dist >::set_lbound()`, `prior_hessian::UpperTruncatedDist< Dist >::set_ubound()`, and `prior_hessian::UpperTruncatedDist< Dist >::UpperTruncatedDist()`.

Here is the caller graph for this function:

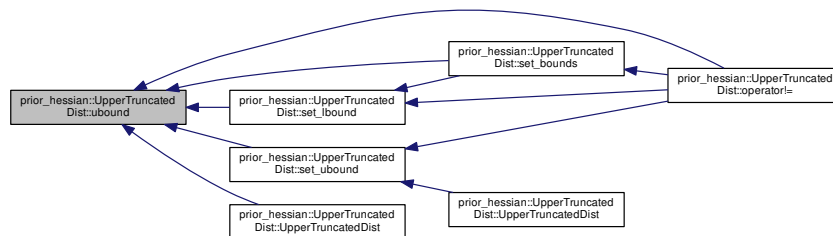

The documentation for this class was generated from the following file:

- [UpperTruncatedDist.h](#)


## 8 File Documentation

### 8.1 AMHCopula.h File Reference

Ali-Mikhail-Haq Archimedean Copula.

```
#include <limits>
#include "PriorHessian/PriorHessianError.h"
#include "PriorHessian/ArchimedeanCopula.h"
#include "PriorHessian/PolyLog.h"
```

Include dependency graph for AMHCopula.h:

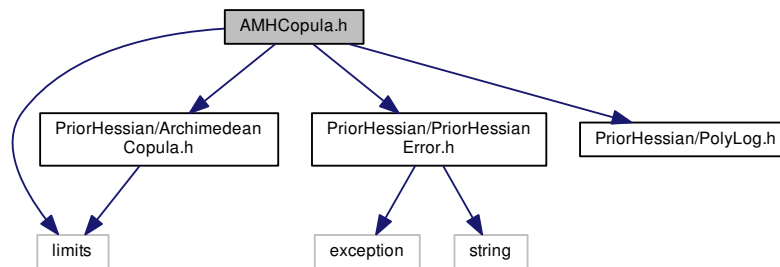

#### Classes

- class [prior\\_hessian::AMHCopula](#) < Ndim >

#### Namespaces

- [prior\\_hessian](#)

#### 8.1.1 Detailed Description

Ali-Mikhail-Haq Archimedean Copula.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date

2017-2019




## 8.2 ArchimedeanCopula.h File Reference


CopulaDist base class.

```
#include <limits>
```

Include dependency graph for ArchimedeanCopula.h:



This graph shows which files directly or indirectly include this file:



### Classes

- class [prior\\_hessian::ArchimedeanCopula](#)
- struct [prior\\_hessian::ArchimedeanCopula::D\\_GenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::D2\\_GenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::D\\_IGenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::D2\\_IGenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::DTheta\\_GenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::D2Theta\\_GenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::DTheta\\_IGenTerms](#)
- struct [prior\\_hessian::ArchimedeanCopula::D2Theta\\_IGenTerms](#)

## Namespaces

- [prior\\_hessian](#)

## 8.2.1 Detailed Description

CopulaDist base class.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017 - 2018

## 8.3 BaseDist.h File Reference

The Base class for UnivariateDist and MultivariateDist.

This graph shows which files directly or indirectly include this file:



## Classes

- class [prior\\_hessian::BaseDist](#)

## Namespaces

- [prior\\_hessian](#)

## 8.3.1 Detailed Description

The Base class for UnivariateDist and MultivariateDist.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.4 BoundsAdaptedDist.h File Reference


Functions and type-traits to enable easy wrapping of distributions in bounds-modifiable adapters.

```
#include <utility>
#include <tuple>
#include <type_traits>
#include "PriorHessian/Meta.h"
```

Include dependency graph for BoundsAdaptedDist.h:

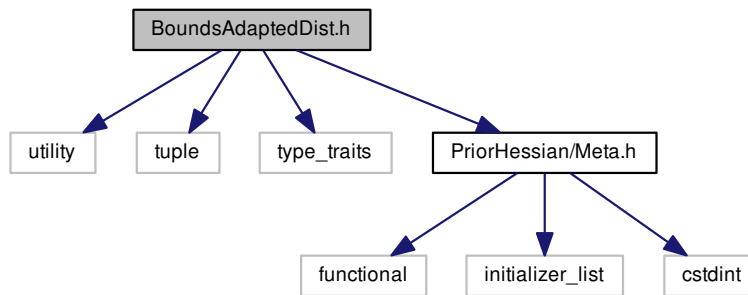

This graph shows which files directly or indirectly include this file:

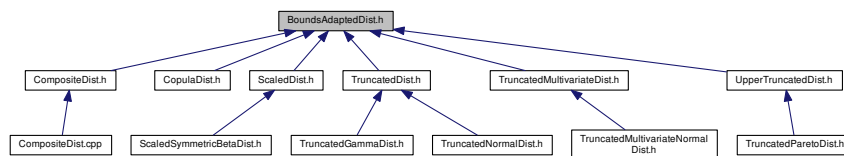

### Classes

- class [prior\\_hessian::detail::dist\\_adaptor\\_traits< Dist >](#)
- struct [prior\\_hessian::meta::all\\_dists\\_are\\_bounded< DistTs >](#)

### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)
- [prior\\_hessian::meta](#)

*Class templates to utilize sequencing behavior of `std::initializer_list` expressions.*

## Typedefs

- `template<class DistT >`  
using `prior_hessian::detail::DistTraitsT` = `detail::dist_adaptor_traits< std::decay_t< DistT >>`
- `template<class DistT >`  
using `prior_hessian::BoundsAdaptedDistT` = `typename detail::dist_adaptor_traits< std::decay_t< DistT >>::bounds_adapted_dist`
- `template<class... DistTs>`  
using `prior_hessian::meta::ConstructableIfAllDistsAreBoundedT` = `std::enable_if< all_dists_are_bounded< DistTs... >::value, bool >`
- `template<class... DistTs>`  
using `prior_hessian::meta::ConstructableIfNotAllDistsAreBoundedT` = `std::enable_if<!all_dists_are_bounded< DistTs... >::value, bool >`

## Functions

- `template<class... Ts, std::size_t... I>`  
`std::tuple< BoundsAdaptedDistT< Ts >... >` `prior_hessian::detail::make_adapted_bounded_dist_tuple` (`std::tuple< Ts... > &&dists, std::index_sequence< I... >`)
- `template<class... Ts, std::size_t... I>`  
`std::tuple< BoundsAdaptedDistT< Ts >... >` `prior_hessian::detail::make_adapted_bounded_dist_tuple` (`const std::tuple< Ts... > &dists, std::index_sequence< I... >`)
- `template<class Dist , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< detail::DistTraitsT< Dist >::adaptable_bounds, Dist >` `prior_hessian::make_adapted_bounded_dist` (`Dist &&dist`)
- `template<class Dist , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< !detail::DistTraitsT< Dist >::adaptable_bounds, BoundsAdaptedDistT< Dist > >` `prior_hessian::make_adapted_bounded_dist` (`Dist &&dist`)
- `template<class Dist , class Vec , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t< detail::DistTraitsT< Dist >::adaptable_bounds, Dist >` `prior_hessian::make_adapted_bounded_dist` (`Dist &&dist, Vec &&lbound, Vec &&ubound`)
- `template<class Dist , class Vec , typename = meta::EnableIfIsNotTupleT<Dist>>`  
`std::enable_if_t<!detail::DistTraitsT< Dist >::adaptable_bounds, BoundsAdaptedDistT< Dist > >` `prior_hessian::make_adapted_bounded_dist` (`Dist &&dist, Vec &&lbound, Vec &&ubound`)
- `template<class... Ts>`  
`std::tuple< BoundsAdaptedDistT< Ts >... >` `prior_hessian::make_adapted_bounded_dist_tuple` (`Ts &&...ts`)
- `template<class... Ts>`  
`std::tuple< BoundsAdaptedDistT< Ts >... >` `prior_hessian::make_adapted_bounded_dist_tuple` (`std::tuple< Ts... > &&dists`)
- `template<class... Ts>`  
`std::tuple< BoundsAdaptedDistT< Ts >... >` `prior_hessian::make_adapted_bounded_dist_tuple` (`const std::tuple< Ts... > &dists`)

### 8.4.1 Detailed Description

Functions and type-traits to enable easy wrapping of distributions in bounds-modifiable adapters.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date

2018-2019 The bounds-adapted version of a distribution is a distribution that has been wrapped by an adapter-class that modifies the distribution so that the bounds can be set to finite values.

The main types of adapters are

- TruncatedDist:
  - Has `global_ubound` and `global_lbound` which may both be infinite (e.g., with the `NormalDist`)
  - Adapts distributions: `NormalDist`, `GammaDist`
- UpperTruncatedDist: Adapts distributions which already have an inherit lower-bound as a parameter
  - Adapts distributions: `ParatoDist`
- ScaledDist:
  - Adapts distributions with finite domain like the Beta distribution by scaling them to arbitrary finite bounds
  - Adapts distributions: `BetaDist`, `SymmetricBetaDist`


Functions: `make_adapted_bounded_dist`

- Make a bounds-adapted version of given distribution `make_adapted_bounded_dist_tuple` -
- Make a tuple of bounds-adapted version of given distributions

## 8.5 CompositeDist.cpp File Reference

CompositeDist and associated classes and nested classes.

```
#include "PriorHessian/CompositeDist.h"
Include dependency graph for CompositeDist.cpp:
```

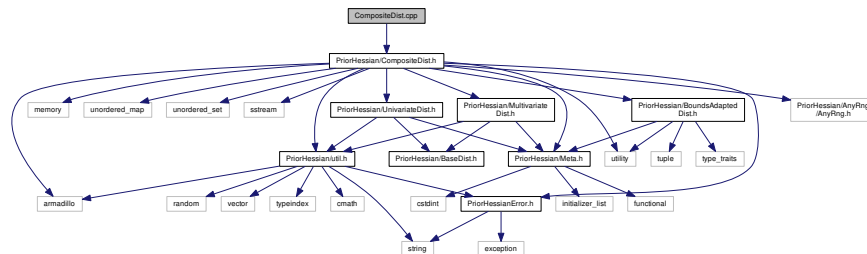

### Namespaces

- [prior\\_hessian](#)

## Functions

- `std::ostream & prior_hessian::operator<<` (`std::ostream &out, const CompositeDist &comp_dist`)

## 8.5.1 Detailed Description

CompositeDist and associated classes and nested classes.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017-2019


## 8.6 CompositeDist.h File Reference

CompositeDist class declaration and inline and templated member function definitions.

```
#include <utility>
#include <memory>
#include <unordered_map>
#include <unordered_set>
#include <sstream>
#include <armadillo>
#include "PriorHessian/Meta.h"
#include "PriorHessian/util.h"
#include "PriorHessian/PriorHessianError.h"
#include "PriorHessian/UnivariateDist.h"
#include "PriorHessian/MultivariateDist.h"
#include "PriorHessian/BoundsAdaptedDist.h"
#include "PriorHessian/AnyRng/AnyRng.h"
Include dependency graph for CompositeDist.h:
```

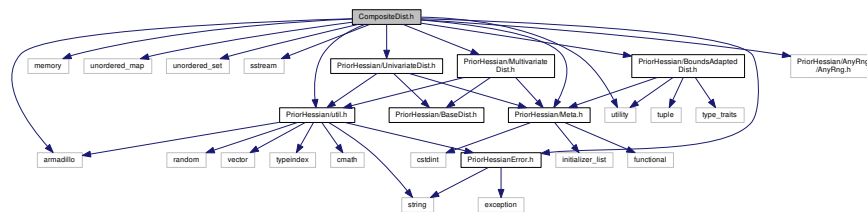

This graph shows which files directly or indirectly include this file:



### Classes

- class [prior\\_hessian::CompositeDist](#)  
*A probability distribution made of independent component distributions composing groups of 1 or more variables.*
- class [prior\\_hessian::CompositeDist::ComponentDistAdaptor< DistT, Enable >](#)
- class [prior\\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, Univariate↔Dist > >](#)
- class [prior\\_hessian::CompositeDist::ComponentDistAdaptor< Dist, meta::EnableIfSubclassT< Dist, Multivariate↔Dist > >](#)

### Namespaces

- [prior\\_hessian](#)

### Functions

- `std::ostream & prior\_hessian::operator<< (std::ostream &out, const CompositeDist &comp_dist)`

#### 8.6.1 Detailed Description

CompositeDist class declaration and inline and templated member function definitions.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date

2017-2019

## 8.6.2 Class Documentation

### 8.6.2.1 class prior\_hessian::CompositeDist::ComponentDistAdaptor


```
template<class DistT, typename Enable = void>  
class prior_hessian::CompositeDist::ComponentDistAdaptor< DistT, Enable >
```

Definition at line 64 of file CompositeDist.h.

## 8.7 copula.h File Reference

CopulaDist base class.

```
#include <limits>  
Include dependency graph for copula.h:
```



### 8.7.1 Detailed Description

CopulaDist base class.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date

2017-2019




## 8.8 CopulaDist.h File Reference

CopulaDist base class.

```
#include "PriorHessian/util.h"
#include "PriorHessian/Meta.h"
#include "PriorHessian/UnivariateDist.h"
#include "PriorHessian/MultivariateDist.h"
#include "PriorHessian/BoundsAdaptedDist.h"
```

Include dependency graph for CopulaDist.h:

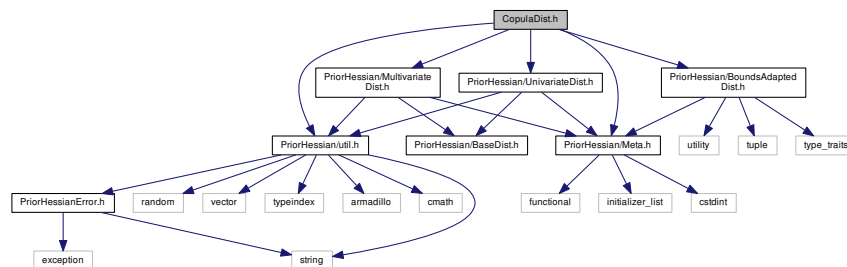

### Classes

- class [prior\\_hessian::CopulaDistImpl::CopulaDist< CopulaTemplate, MarginalDistTs >](#)
- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< CopulaDistImpl::CopulaDist< CopulaTemplate, DistTs... > >](#)

### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::CopulaDistImpl](#)
- [prior\\_hessian::detail](#)

### Typedefs

- `template<template< int > class CopulaTemplate, class... MarginalDistTs>`  
`using prior\_hessian::CopulaDist = CopulaDistImpl::CopulaDist< CopulaTemplate, BoundsAdaptedDist< MarginalDistTs >... >`

### Functions

- `template<template< int > class CopulaTemplate, class... MarginalDistTs>`  
`CopulaDist< CopulaTemplate, MarginalDistTs... > prior\_hessian::make\_copula\_dist (CopulaTemplate< sizeof...(MarginalDistTs)> &&copula, MarginalDistTs &&...dists)`

### 8.8.1 Detailed Description

CopulaDist base class.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date


2017-2019

## 8.9 EulerianPolynomial.h File Reference

EulerianPolynomial computation.

```
#include <armadillo>
```

Include dependency graph for EulerianPolynomial.h:



#### Classes

- struct [prior\\_hessian::eulerian\\_number< N, M >](#)
- struct [prior\\_hessian::eulerian\\_number< 0, M >](#)

#### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)

#### Functions

- template<long N, long... I>  
VecT [prior\\_hessian::detail::eulerian\\_polynomial](#) ()
- template<long N>  
VecT [prior\\_hessian::eulerian\\_polynomial](#) ()

### 8.9.1 Detailed Description

EulerianPolynomial computation.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date


2017-2019

## 8.10 GammaDist.cpp File Reference

GammaDist class definition.

```
#include "PriorHessian/GammaDist.h"
#include "PriorHessian/util.h"
#include "PriorHessian/PriorHessianError.h"
#include <cmath>
#include <sstream>
#include <limits>
#include <boost/math/special_functions/gamma.hpp>
```

Include dependency graph for GammaDist.cpp:

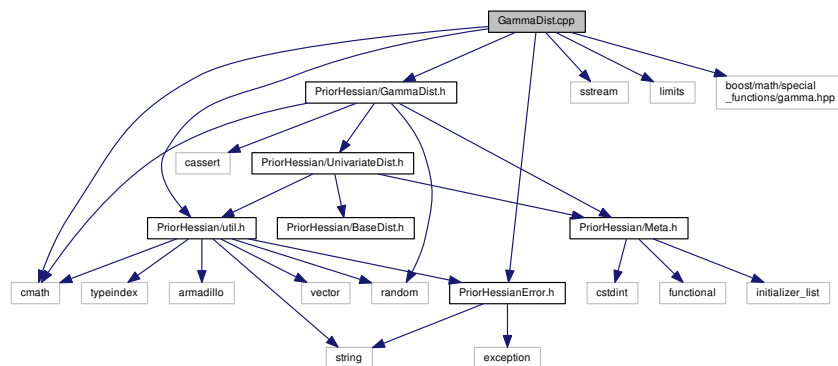

#### Namespaces

- [prior\\_hessian](#)

## 8.10.1 Detailed Description

GammaDist class definition.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.11 GammaDist.h File Reference


GammaDist class declaration and templated methods.

```
#include <cassert>
#include <cmath>
#include <random>
#include "PriorHessian/Meta.h"
#include "PriorHessian/UnivariateDist.h"
```

Include dependency graph for GammaDist.h:

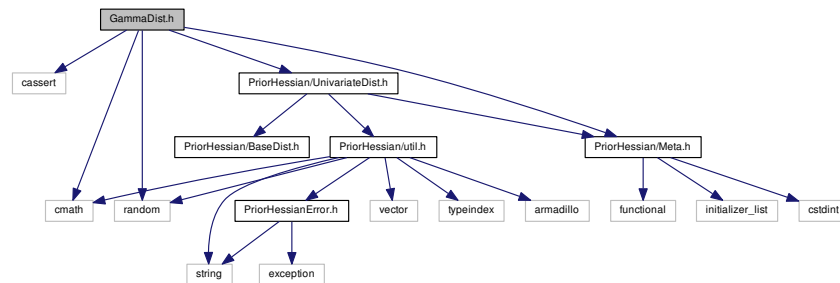

This graph shows which files directly or indirectly include this file:

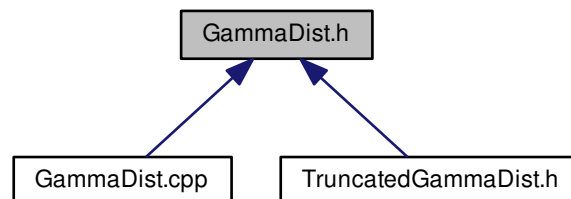

## Classes

- class [prior\\_hessian::GammaDist](#)  
*Gamma distribution.*

## Namespaces

- [prior\\_hessian](#)

## 8.11.1 Detailed Description

GammaDist class declaration and templated methods.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017-2019


## 8.12 Meta.h File Reference

Enables the use of variadic templates in interesting ways.

```
#include <functional>
#include <initializer_list>
#include <cstdint>
Include dependency graph for Meta.h:
```

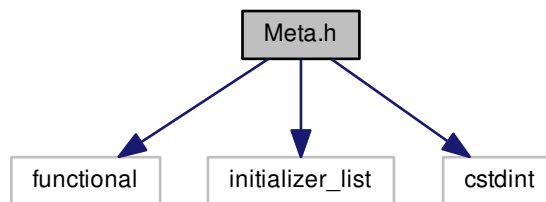

This graph shows which files directly or indirectly include this file:



## Classes

- struct [prior\\_hessian::meta::conjunction<... >](#)
- struct [prior\\_hessian::meta::conjunction< B1 >](#)
- struct [prior\\_hessian::meta::conjunction< B1, Bn... >](#)
- struct [prior\\_hessian::meta::disjunction<... >](#)
- struct [prior\\_hessian::meta::disjunction< B1 >](#)
- struct [prior\\_hessian::meta::disjunction< B1, Bn... >](#)
- struct [prior\\_hessian::meta::is\\_template\\_of< class, typename >](#)
- struct [prior\\_hessian::meta::is\\_template\\_of< ClassTemplate, ClassTemplate< Ts... > >](#)
- struct [prior\\_hessian::meta::is\\_numeric\\_template\\_of< class, typename >](#)
- struct [prior\\_hessian::meta::is\\_numeric\\_template\\_of< ClassNumericTemplate, ClassNumericTemplate< Is... > >](#)
- class [prior\\_hessian::meta::is\\_subclass\\_of\\_numeric\\_template< T, U >](#)
- class [prior\\_hessian::meta::is\\_copula< T, U >](#)

## Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::meta](#)

*Class templates to utilize sequencing behavior of `std::initializer_list` expressions.*

## Macros

- `#define GCC\_VERSION (__GNUC__ * 100 + __GNUC_MINOR__ * 10 + __GNUC_PATCHLEVEL__)`
- `#define PRIOR\_HESSIAN\_META\_CONSTEXPR constexpr`
- `#define PRIOR\_HESSIAN\_META\_HAS\_CONSTEXPR 1`

## Typedefs

- `template<template< template< int > class, class... > class CopulaT, class U >  
using prior\_hessian::meta::ConstructableIfsCopulaT = std::enable_if_t< is_copula< CopulaT, U >::value, bool >`
- `template<class ReturnT, class BoolT >  
using prior\_hessian::meta::ReturnIfT = std::enable_if_t< BoolT::value, ReturnT >`
- `template<bool val>  
using prior\_hessian::meta::ConstructableIf = std::enable_if_t< val, bool >`
- `template<bool val>  
using prior\_hessian::meta::ConstructableIfNot = std::enable_if_t<!val, bool >`
- `template<class T, class SelfT >  
using prior\_hessian::meta::ConstructableIfNotSelfT = std::enable_if_t<!std::is_same< std::decay_t< T >, SelfT >::value, bool >`
- `template<class T, class BaseT >  
using prior\_hessian::meta::EnableIfSubclassT = std::enable_if_t< std::is_base_of< std::remove_reference_t< BaseT >, std::remove_reference_t< T >>::value >`
- `template<class T, template< int > class ClassNumericTemplate>  
using prior\_hessian::meta::EnableIfSubclassOfNumericTemplateT = std::enable_if_t< is_subclass_of_numeric<←  
_template< ClassNumericTemplate, std::remove_reference_t< T >>::value >`

- `template<class ReturnT, class T, template< int > class ClassNumericTemplate>`  
`using prior_hessian::meta::ReturnIfSubclassOfNumericTemplateT = std::enable_if_t< is_subclass_of_numeric_`  
`_template< ClassNumericTemplate, std::remove_reference_t< T >>::value, ReturnT >`
- `template<class T, class SelfT >`  
`using prior_hessian::meta::EnableIfNotIsSelfT = std::enable_if_t< !std::is_same< std::decay_t< T >, SelfT >_`  
`::value >`
- `template<class ReturnT, class T, class BaseT >`  
`using prior_hessian::meta::ReturnIfSubclassT = std::enable_if_t< std::is_base_of< std::remove_reference_t<`  
`BaseT >, std::remove_reference_t< T >>::value, ReturnT >`
- `template<class BaseT, class... Ts>`  
`using prior_hessian::meta::EnableIfIsSuperclassOfAllT = std::enable_if_t< conjunction< std::is_base_of< std_`  
`::remove_reference_t< BaseT >, std::remove_reference_t< Ts >>... >::value >`
- `template<class T, template< typename... > class ClassTemplate>`  
`using prior_hessian::meta::EnableIfInstantiatedFromT = std::enable_if_t< is_template_of< ClassTemplate, std_`  
`::remove_reference_t< T >>::value >`
- `template<class T, template< int > class ClassTemplate>`  
`using prior_hessian::meta::EnableIfInstantiatedFromNumericT = std::enable_if_t< is_numeric_template_of<`  
`ClassTemplate, std::remove_reference_t< T >>::value >`
- `template<class ReturnT, class T, template< int > class ClassTemplate>`  
`using prior_hessian::meta::ReturnIfInstantiatedFromNumericT = std::enable_if_t< is_numeric_template_of<`  
`ClassTemplate, std::remove_reference_t< T >>::value, ReturnT >`
- `template<class T, template< typename... > class ClassTemplate>`  
`using prior_hessian::meta::EnableIfNotInstantiatedFromT = std::enable_if_t< !is_template_of< ClassTemplate,`  
`std::remove_reference_t< T >>::value >`
- `template<class ReturnT, class TestT, template< typename... > class ClassTemplate>`  
`using prior_hessian::meta::ReturnIfInstantiatedFromT = std::enable_if_t< is_template_of< ClassTemplate, std_`  
`::remove_reference_t< TestT >>::value, ReturnT >`
- `template<class ReturnT, class TestT, template< typename... > class ClassTemplate>`  
`using prior_hessian::meta::ReturnIfNotInstantiatedFromT = std::enable_if_t< !is_template_of< ClassTemplate,`  
`std::remove_reference_t< TestT >>::value, ReturnT >`
- `template<template< typename > class ClassTemplate, class... Ts>`  
`using prior_hessian::meta::EnableIfIsTemplateForAllT = std::enable_if_t< conjunction< is_template_of<`  
`ClassTemplate, std::remove_reference_t< Ts >>... >::value >`
- `template<template< typename... > class ClassTemplate, class... Ts>`  
`using prior_hessian::meta::ConstructableIfIsTemplateForAllT = std::enable_if_t< conjunction< is_template_of<`  
`ClassTemplate, std::remove_reference_t< Ts >>... >::value, bool >`
- `template<class SuperClass, class T >`  
`using prior_hessian::meta::ConstructableIfIsSuperClassT = std::enable_if_t< std::is_base_of< std::remove_`  
`reference_t< SuperClass >, std::remove_reference_t< T >>::value, bool >`
- `template<class SuperClass, class... Ts>`  
`using prior_hessian::meta::ConstructableIfIsSuperClassForAllT = std::enable_if_t< conjunction< std::is_base_`  
`_of< std::remove_reference_t< SuperClass >, std::remove_reference_t< Ts >>... >::value, bool >`
- `template<class T, template< int > class ClassTemplate>`  
`using prior_hessian::meta::ConstructableIfInstantiatedFromNumericT = std::enable_if_t< is_numeric_template_`  
`_of< ClassTemplate, std::remove_reference_t< T >>::value, bool >`
- `template<class T >`  
`using prior_hessian::meta::EnableIfIsNotTupleT = std::enable_if_t< !is_template_of< std::tuple, std::remove_`  
`reference_t< T >>::value >`
- `template<class... Ts>`  
`using prior_hessian::meta::EnableIfNonEmpty = std::enable_if_t< (sizeof...(Ts)>0) >`
- `template<class... Ts>`  
`using prior_hessian::meta::EnableIfAllAreNotTupleT = std::enable_if_t< !disjunction< is_template_of< std::tuple,`  
`std::remove_reference_t< Ts >>... >::value >`

- `template<class SelfT , class T >`  
`using prior_hessian::meta::EnableIfIsNotTupleAndIsNotSelfT = std::enable_if_t< !is_template_of< std::tuple, std::remove_reference_t< T >>::value &&!std::is_same< std::decay_t< T >, SelfT >::value >`
- `template<class T , class... Ts>`  
`using prior_hessian::meta::ConstructableIfAllAreNotTupleAndAreNotT = std::enable_if_t< !disjunction< is_↔template_of< std::tuple, std::remove_reference_t< Ts >>... >::value &&!disjunction< std::is_same< std↔::decay_t< Ts >, T >... >::value, bool >`
- `template<class Dist , class BaseDist >`  
`using prior_hessian::meta::DerivedFrom = std::enable_if_t< std::is_base_of< std::decay_t< BaseDist >, std↔::decay_t< Dist >>::value, std::decay_t< Dist >>`

## Functions

- `template<class T = int>`  
`void prior_hessian::meta::call_in_order (std::initializer_list< T >)`
- `template<class InputIterator , class ResultT , class BinaryOperation >`  
`PRIOR_HESSIAN_META_CONSTEXPR ResultT prior_hessian::meta::constexpr_accumulate (InputIterator first, InputIterator last, ResultT init, BinaryOperation op)`
- `PRIOR_HESSIAN_META_CONSTEXPR bool prior_hessian::meta::logical_and_in_order (std::initializer_list< bool > L)`
- `template<class T >`  
`PRIOR_HESSIAN_META_CONSTEXPR T prior_hessian::meta::sum_in_order (std::initializer_list< T > L)`
- `template<class T >`  
`PRIOR_HESSIAN_META_CONSTEXPR T prior_hessian::meta::prod_in_order (std::initializer_list< T > L)`

### 8.12.1 Detailed Description

Enables the use of variadic templates in interesting ways.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date

2017-2019

### 8.12.2 Macro Definition Documentation

#### 8.12.2.1 `#define GCC_VERSION (__GNUC__ * 100 + __GNUC_MINOR__ * 10 + __GNUC_PATCHLEVEL__)`

Definition at line 11 of file Meta.h.

#### 8.12.2.2 `#define PRIOR_HESSIAN_META_CONSTEXPR constexpr`

Definition at line 15 of file Meta.h.

Referenced by `prior_hessian::meta::call_in_order()`, `prior_hessian::meta::constexpr_accumulate()`, `prior_hessian↔::meta::logical_and_in_order()`, and `prior_hessian::meta::sum_in_order()`.




### 8.12.2.3 #define PRIOR\_HESSIAN\_META\_HAS\_CONSTEXPR 1

Definition at line 16 of file Meta.h.


## 8.13 MultivariateDist.h File Reference

MultivariateDist base class.

```
#include "PriorHessian/util.h"
#include "PriorHessian/Meta.h"
#include "PriorHessian/BaseDist.h"
Include dependency graph for MultivariateDist.h:
```

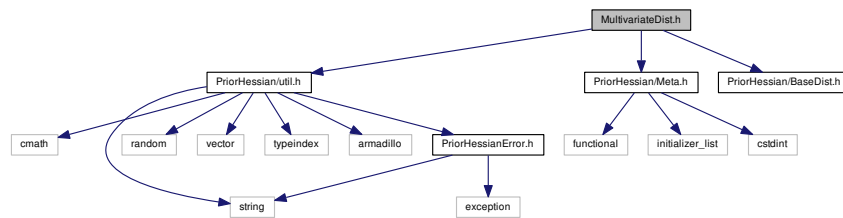

This graph shows which files directly or indirectly include this file:

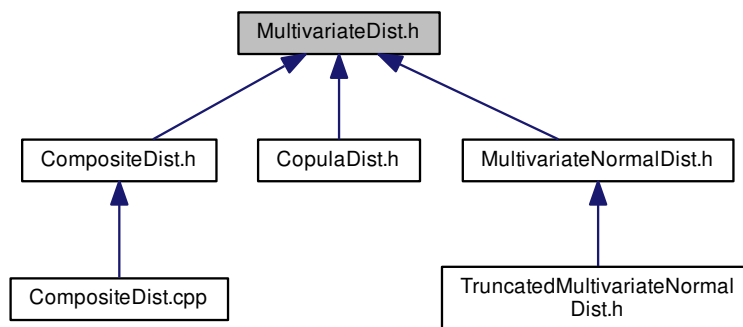

### Classes

- class [prior\\_hessian::MultivariateDist](#)

## Namespaces

- [prior\\_hessian](#)

## 8.13.1 Detailed Description

MultivariateDist base class.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date

2017-2019

## 8.14 MultivariateNormalDist.h File Reference


MultivariateNormalDist base class.

```
#include "PriorHessian/MultivariateDist.h"
```


```
#include "PriorHessian/Meta.h"
```

```
#include "PriorHessian/mvn_cdf.h"
```

Include dependency graph for MultivariateNormalDist.h:

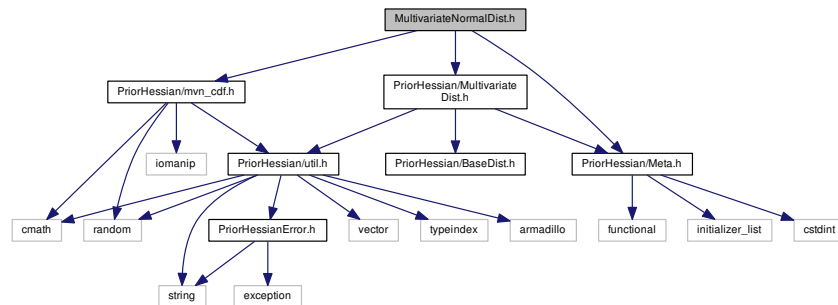

This graph shows which files directly or indirectly include this file:

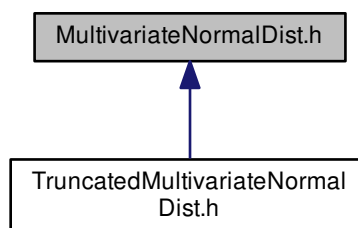

## Classes

- class `prior_hessian::MultivariateNormalDist< Ndim >`  
*Multivariate Normal distribution.*

## Namespaces

- `prior_hessian`
- `prior_hessian::helpers`

## Functions

- `template<class Vec , class Mat >`  
`double prior_hessian::helpers::compute_quadratic_from_symmetric (IdxT Ndim, const Vec &v, const Mat &A)`

## 8.14.1 Detailed Description

MultivariateNormalDist base class.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017-2019

## 8.15 mvn\_cdf.cpp File Reference

```
#include "PriorHessian/mvn_cdf.h"
#include <cmath>
#include <limits>
#include <armadillo>
#include <boost/math/special_functions/erf.hpp>
#include <boost/math/constants/constants.hpp>
```

Include dependency graph for mvn\_cdf.cpp:

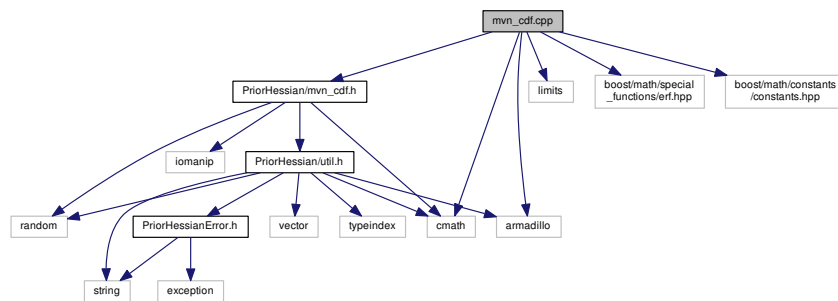

## Namespaces

- [prior\\_hessian](#)

## Functions

- double [prior\\_hessian::unit\\_normal\\_cdf](#) (double t)
- double [prior\\_hessian::unit\\_normal\\_icdf](#) (double u)
- double [prior\\_hessian::bounded](#) (double x)
- double [prior\\_hessian::owen\\_t\\_integral](#) (double h, double a, double gh)
- double [prior\\_hessian::owen\\_b\\_integral](#) (double h, double k, double r)
- double [prior\\_hessian::donnelly\\_bvn\\_integral](#) (double ah, double ak, double r)
- double [prior\\_hessian::donnelly\\_bvn\\_integral\\_orig](#) (double ah, double ak, double r)

## 8.15.1 Detailed Description

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.16 mvn\_cdf.h File Reference


Numerical computation of multivariate normal cdfs in 2,3 and higher dims.

```
#include <iomanip>
#include <random>
#include <cmath>
#include "PriorHessian/util.h"
```

Include dependency graph for mvn\_cdf.h:

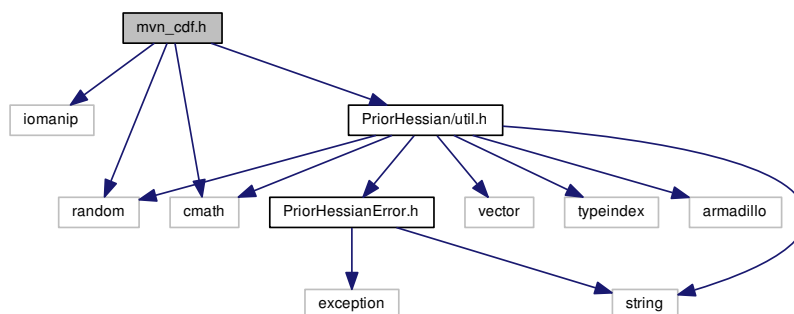

This graph shows which files directly or indirectly include this file:

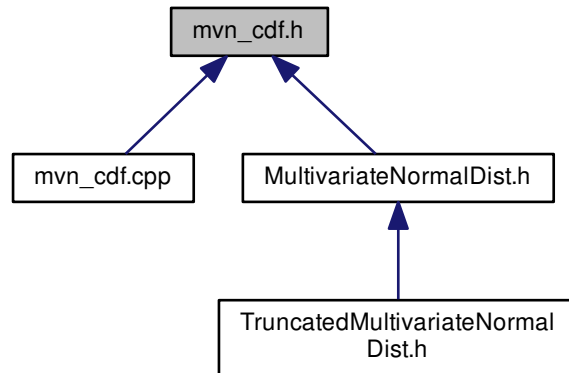

### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::genz](#)
- [prior\\_hessian::genz::fortran](#)

### Functions

- double [prior\\_hessian::unit\\_normal\\_cdf](#) (double t)
- double [prior\\_hessian::unit\\_normal\\_icdf](#) (double u)
- double [prior\\_hessian::owen\\_t\\_integral](#) (double h, double a, double gh)
- double [prior\\_hessian::owen\\_t\\_integral](#) (double h, double a)
- double [prior\\_hessian::owen\\_b\\_integral](#) (double h, double k, double r)
- double [prior\\_hessian::donnelly\\_bvn\\_integral](#) (double ah, double ak, double r)
- double [prior\\_hessian::donnelly\\_bvn\\_integral\\_orig](#) (double ah, double ak, double r)
- `template<class Vec , class Mat >`  
double [prior\\_hessian::donnelly\\_bvn\\_cdf](#) (const Vec &b, const Mat &sigma)
- `template<class Vec , class Mat >`  
double [prior\\_hessian::owen\\_bvn\\_cdf](#) (const Vec &b, const Mat &sigma)
- `template<class Vec , class Mat >`  
double [prior\\_hessian::mc\\_mvn\\_integral](#) (const Vec &a, const Vec &b, const Mat &U, double &error, int &niter)
- `template<class Vec , class Mat >`  
double [prior\\_hessian::mc\\_mvn\\_cdf\\_core](#) (const Vec &b, const Mat &U, double &error, int &niter)
- `template<class Vec , class Mat >`  
double [prior\\_hessian::mc\\_mvn\\_cdf](#) (const Vec &b, const Mat &S, double &error)
- int [prior\\_hessian::genz::fortran::mvndst\\_](#) (int \*n, double lower[], double upper[], int infin[], double correl[], int \*maxpts, double \*abseps, double \*releps, double \*error, double \*value, int \*inform)
- `template<class Vec , class Mat >`  
double [prior\\_hessian::genz::mvn\\_cdf\\_genz](#) (const Vec &b, const Mat &S, double &error)

## 8.16.1 Detailed Description

Numerical computation of multivariate normal cdfs in 2,3 and higher dims.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.17 NormalDist.cpp File Reference

NormalDist class definition.

```
#include "PriorHessian/NormalDist.h"
#include "PriorHessian/PriorHessianError.h"
#include <sstream>
#include <cmath>
#include <limits>
#include <boost/math/special_functions/erf.hpp>
#include <boost/math/constants/constants.hpp>
```

Include dependency graph for NormalDist.cpp:

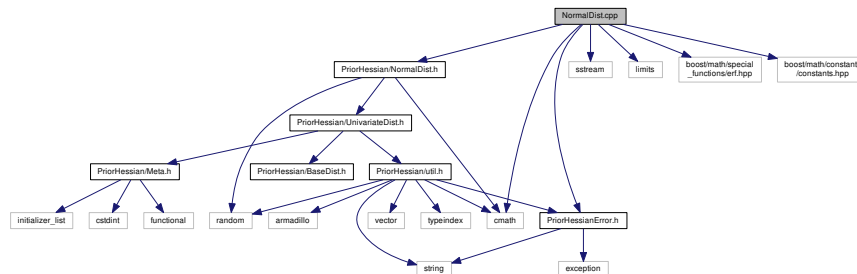

## Namespaces

- [prior\\_hessian](#)

## 8.17.1 Detailed Description

NormalDist class definition.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.18 NormalDist.h File Reference


NormalDist class declaration and templated methods.

```
#include <cmath>
#include <random>
#include "PriorHessian/UnivariateDist.h"
```

Include dependency graph for NormalDist.h:

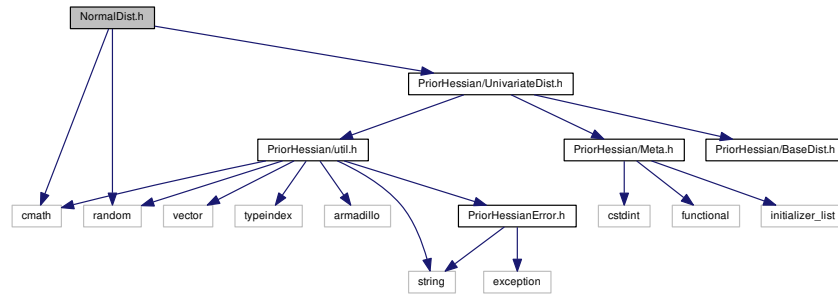

This graph shows which files directly or indirectly include this file:

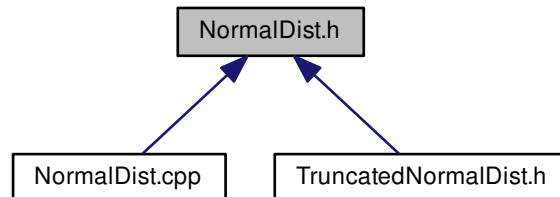

### Classes

- class [prior\\_hessian::NormalDist](#)  
*Normal distribution with truncation.*

### Namespaces

- [prior\\_hessian](#)

## 8.18.1 Detailed Description

NormalDist class declaration and templated methods.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.19 ParetoDist.cpp File Reference

ParetoDist class definition.

```
#include "PriorHessian/ParetoDist.h"
#include "PriorHessian/PriorHessianError.h"
#include <cmath>
#include <sstream>
#include <limits>
```

Include dependency graph for ParetoDist.cpp:

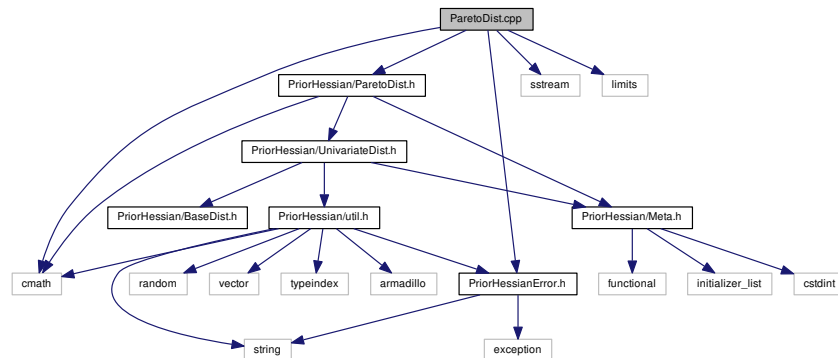

## Namespaces

- [prior\\_hessian](#)

## 8.19.1 Detailed Description

ParetoDist class definition.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019




## 8.20 ParetoDist.h File Reference

ParetoDist class declaration and templated methods.

```
#include <cmath>
#include "PriorHessian/Meta.h"
#include "PriorHessian/UnivariateDist.h"
Include dependency graph for ParetoDist.h:
```

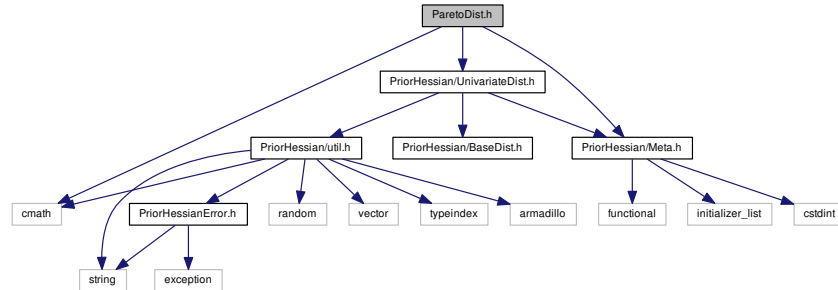

This graph shows which files directly or indirectly include this file:

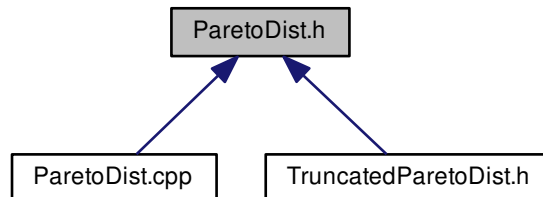

### Classes

- class [prior\\_hessian::ParetoDist](#)  
*Pareto dist with infinite upper bound.*

### Namespaces

- [prior\\_hessian](#)

### 8.20.1 Detailed Description

ParetoDist class declaration and templated methods.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)


#### Date

2017-2019

## 8.21 PolyLog.h File Reference

Poly log computation for negative integer valued parameters.

This graph shows which files directly or indirectly include this file:



#### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::polylog](#)

#### Functions

- `template<int n>`  
`double prior_hessian::polylog::eulerian_polynomial (double z)`
- `template<>`  
`double prior_hessian::polylog::eulerian_polynomial< 0 > (double)`
- `template<>`  
`double prior_hessian::polylog::eulerian_polynomial< 1 > (double z)`
- `template<>`  
`double prior_hessian::polylog::eulerian_polynomial< 2 > (double z)`

- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 3 >` (double z)
- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 4 >` (double z)
- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 5 >` (double z)
- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 6 >` (double z)
- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 7 >` (double z)
- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 8 >` (double z)
- `template<>`  
double `prior_hessian::polylog::eulerian_polynomial< 9 >` (double z)
- `template<int n>`  
double `prior_hessian::polylog::polylog` (double z)
- `template<>`  
double `prior_hessian::polylog::polylog< 1 >` (double z)

### 8.21.1 Detailed Description

Poly log computation for negative integer valued parameters.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date


2017-2019

### 8.22 PriorHessianError.h File Reference

The Exception classes for the PriorHessian library.

```
#include <exception>
#include <string>
```

Include dependency graph for PriorHessianError.h:





## 8.22.2 Macro Definition Documentation

### 8.22.2.1 #define ASSERT\_SETUP( ... )

Definition at line 37 of file PriorHessianError.h.

### 8.22.2.2 #define DEBUG\_ASSERT( ... )

Definition at line 32 of file PriorHessianError.h.


## 8.23 README.md File Reference

## 8.24 ScaledDist.h File Reference


ScaledDist class declaration and templated methods.

```
#include <cmath>
#include "PriorHessian/Meta.h"
#include "PriorHessian/PriorHessianError.h"
#include "PriorHessian/BoundsAdaptedDist.h"
```

Include dependency graph for ScaledDist.h:

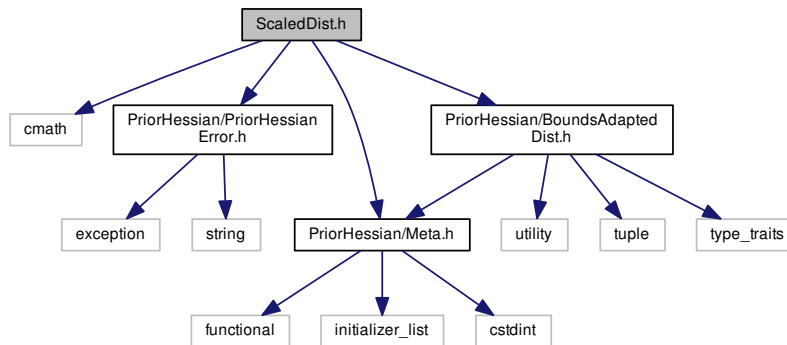

This graph shows which files directly or indirectly include this file:



## Classes

- class [prior\\_hessian::ScaledDist< Dist >](#)

## Namespaces

- [prior\\_hessian](#)

## 8.24.1 Detailed Description

ScaledDist class declaration and templated methods.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date

2017-2019


## 8.25 ScaledSymmetricBetaDist.h File Reference

ScaledSymmetricBetaDist class declaration and templated methods.

```
#include "PriorHessian/SymmetricBetaDist.h"
```

```
#include "PriorHessian/ScaledDist.h"
```

Include dependency graph for ScaledSymmetricBetaDist.h:

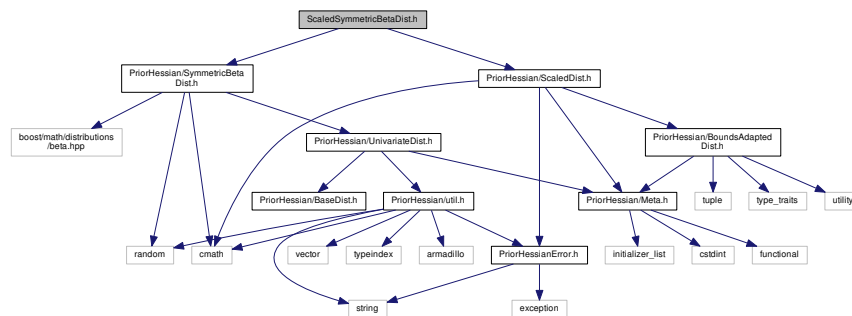

## Classes

- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< SymmetricBetaDist >](#)
- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< ScaledSymmetricBetaDist >](#)

## Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)

## Typedefs

- using [prior\\_hessian::ScaledSymmetricBetaDist](#) = ScaledDist< SymmetricBetaDist >

## Functions

- ScaledSymmetricBetaDist [prior\\_hessian::make\\_scaled\\_symmetric\\_beta\\_dist](#) (double beta, std::pair< double, double > bounds)

## 8.25.1 Detailed Description

ScaledSymmetricBetaDist class declaration and templated methods.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.26 SymmetricBetaDist.cpp File Reference

SymmetricBetaDist class definition.

```
#include "PriorHessian/SymmetricBetaDist.h"
#include "PriorHessian/PriorHessianError.h"
#include <sstream>
#include <cmath>
#include <limits>
#include <boost/math/special_functions/beta.hpp>
```

Include dependency graph for SymmetricBetaDist.cpp:

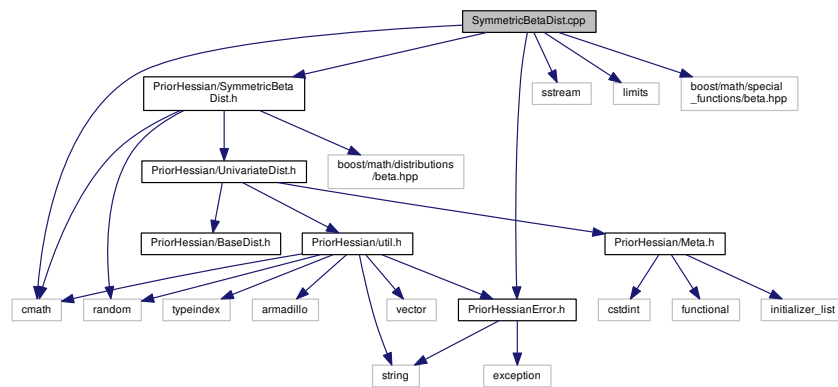

## Namespaces

- [prior\\_hessian](#)

## 8.26.1 Detailed Description

SymmetricBetaDist class definition.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017-2019

## 8.27 SymmetricBetaDist.h File Reference


SymmetricBetaDist class declaration and templated methods.

```
#include <cmath>
#include <random>
#include <boost/math/distributions/beta.hpp>
#include "PriorHessian/UnivariateDist.h"
Include dependency graph for SymmetricBetaDist.h:
```

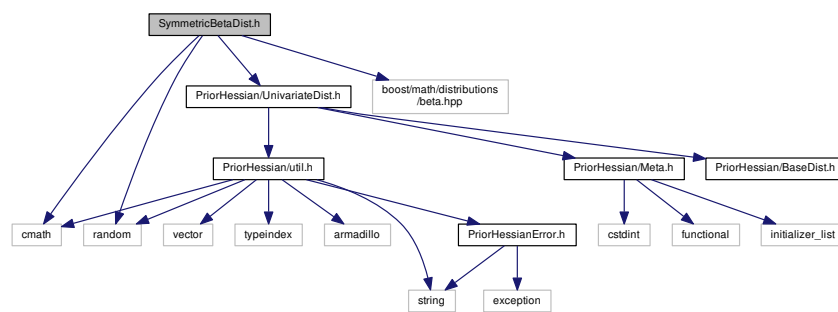



This graph shows which files directly or indirectly include this file:

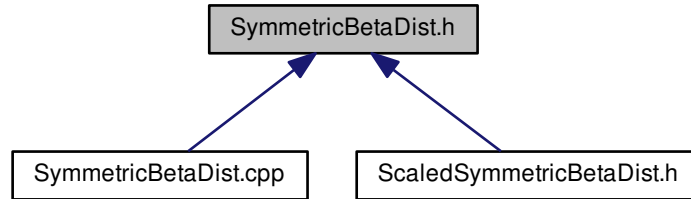

## Classes

- class [prior\\_hessian::SymmetricBetaDist](#)

*Single parameter beta distribution where  $\alpha = \beta$ , leading to symmetric bounded distribution.*

## Namespaces

- [prior\\_hessian](#)

### 8.27.1 Detailed Description

SymmetricBetaDist class declaration and templated methods.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017-2019


## 8.28 TruncatedDist.h File Reference

TruncatedDist declaration and templated methods definitions.

```
#include <cmath>
#include "PriorHessian/Meta.h"
#include "PriorHessian/PriorHessianError.h"
#include "PriorHessian/BoundsAdaptedDist.h"
Include dependency graph for TruncatedDist.h:
```

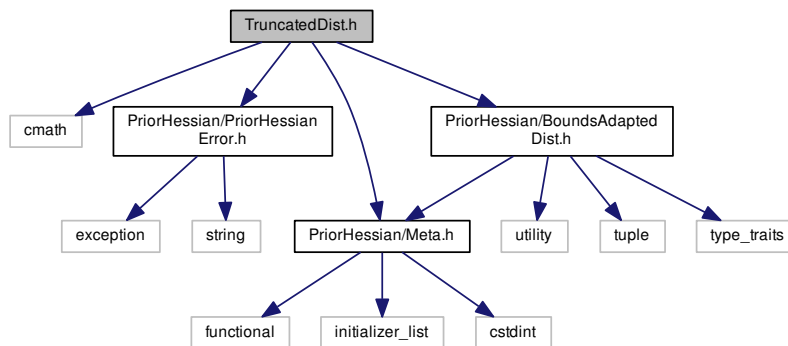

This graph shows which files directly or indirectly include this file:

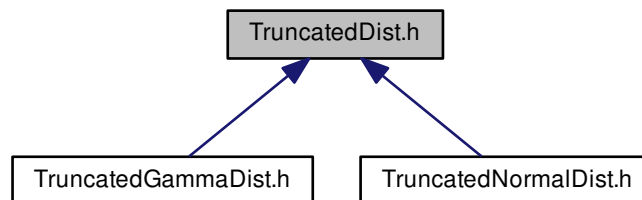

## Classes

- class [prior\\_hessian::TruncatedDist< Dist >](#)

## Namespaces

- [prior\\_hessian](#)

### 8.28.1 Detailed Description

TruncatedDist declaration and templated methods definitions.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)


#### Date

2017-2019

### 8.29 TruncatedGammaDist.h File Reference

TruncatedGammaDist class declaration and templated methods.

```
#include "PriorHessian/GammaDist.h"
#include "PriorHessian/TruncatedDist.h"
Include dependency graph for TruncatedGammaDist.h:
```

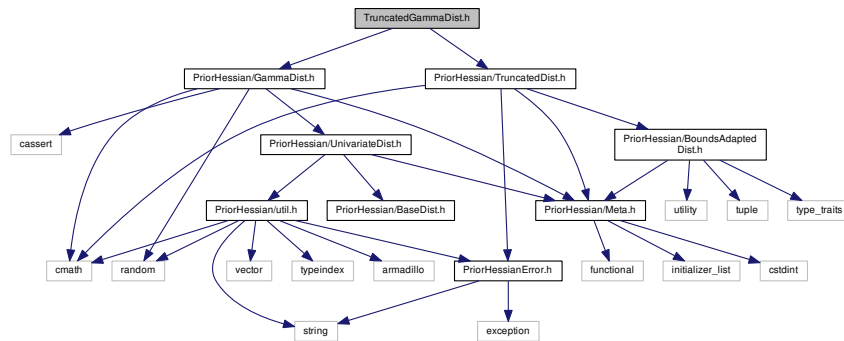

#### Classes

- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< GammaDist >](#)
- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< TruncatedGammaDist >](#)

#### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)

#### Typedefs

- using [prior\\_hessian::TruncatedGammaDist](#) = [TruncatedDist< GammaDist >](#)

## Functions

- TruncatedGammaDist [prior\\_hessian::make\\_bounded\\_gamma\\_dist](#) (double scale, double shape, std::pair< double, double > bounds)

## 8.29.1 Detailed Description

TruncatedGammaDist class declaration and templated methods.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.30 TruncatedMultivariateDist.h File Reference


TruncatedMultivariateDist declaration and templated methods definitions.

```
#include <cmath>
#include <bitset>
#include <mutex>
#include "PriorHessian/Meta.h"
#include "PriorHessian/PriorHessianError.h"
#include "PriorHessian/BoundsAdaptedDist.h"
```

Include dependency graph for TruncatedMultivariateDist.h:

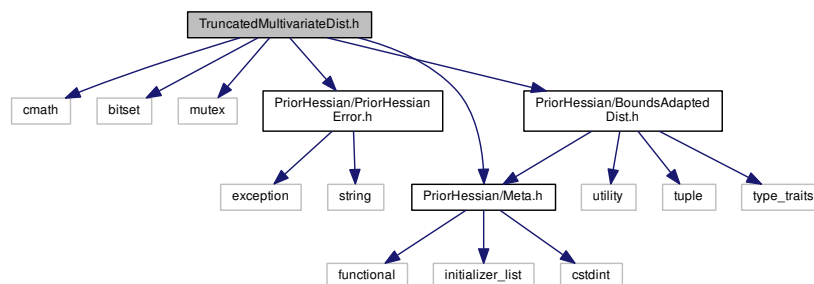

This graph shows which files directly or indirectly include this file:

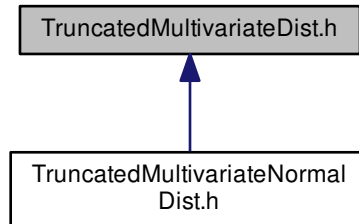

#### Classes

- class [prior\\_hessian::mcmc::MCMCData< Ndim >](#)
- class [prior\\_hessian::TruncatedMultivariateDist< Dist >](#)

#### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::mcmc](#)

#### 8.30.1 Detailed Description

TruncatedMultivariateDist declaration and templated methods definitions.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)


#### Date

2017-2019

## 8.31 TruncatedMultivariateNormalDist.h File Reference

TruncatedMultivariateNormalDist class declaration.

```
#include "PriorHessian/MultivariateNormalDist.h"
#include "PriorHessian/TruncatedMultivariateDist.h"
Include dependency graph for TruncatedMultivariateNormalDist.h:
```

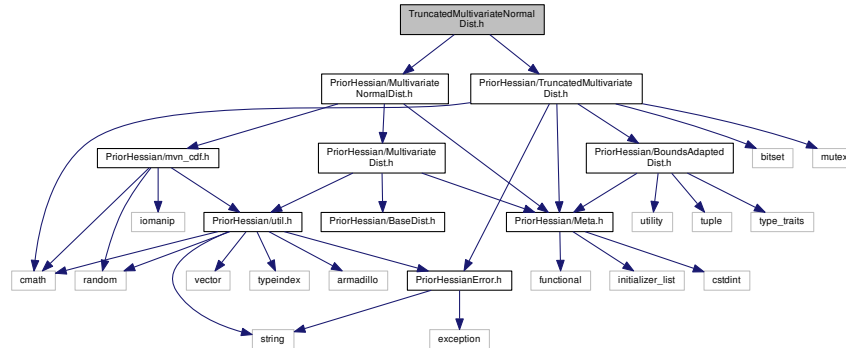

## Classes

- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< MultivariateNormalDist< Ndim > >](#)
- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< TruncatedMultivariateNormalDist< Ndim > >](#)

## Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)

## Typedefs

- `template<IdxT Ndim>`  
using [prior\\_hessian::TruncatedMultivariateNormalDist](#) = `TruncatedMultivariateDist< MultivariateNormalDist< Ndim >>`

## Functions

- `template<IdxT Ndim, class Vec, class Mat, class Vec2 >`  
`TruncatedMultivariateNormalDist< Ndim >` [prior\\_hessian::make\\_bounded\\_multivariate\\_normal\\_dist](#) (Vec &&mu, Mat &&sigma, Vec2 &&lbound, Vec2 &&ubound)

### 8.31.1 Detailed Description

TruncatedMultivariateNormalDist class declaration.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)


#### Date

2017-2019

### 8.32 TruncatedNormalDist.h File Reference

TruncatedNormalDist class declaration.

```
#include "PriorHessian/NormalDist.h"
#include "PriorHessian/TruncatedDist.h"
Include dependency graph for TruncatedNormalDist.h:
```

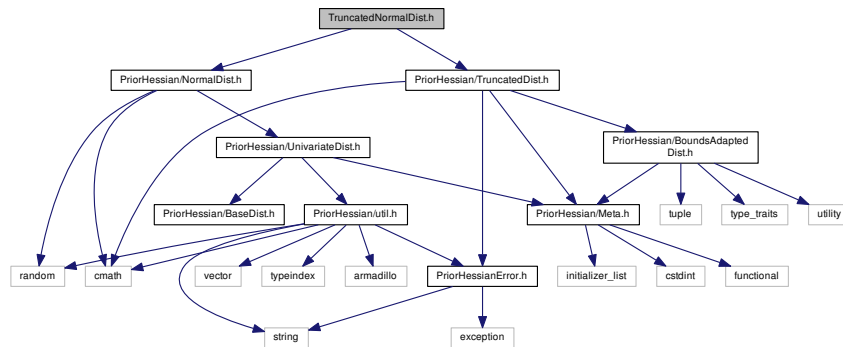

#### Classes

- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< NormalDist >](#)
- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< TruncatedNormalDist >](#)

#### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)

#### Typedefs

- using [prior\\_hessian::TruncatedNormalDist](#) = [TruncatedDist< NormalDist >](#)

## Functions

- TruncatedNormalDist [prior\\_hessian::make\\_bounded\\_normal\\_dist](#) (double mu, double sigma, std::pair< double, double > bounds)

## 8.32.1 Detailed Description

TruncatedNormalDist class declaration.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)


## Date

2017-2018

## 8.33 TruncatedParetoDist.h File Reference

TruncatedParetoDist class declaration and templated methods.

```
#include "PriorHessian/ParetoDist.h"
#include "PriorHessian/UpperTruncatedDist.h"
Include dependency graph for TruncatedParetoDist.h:
```

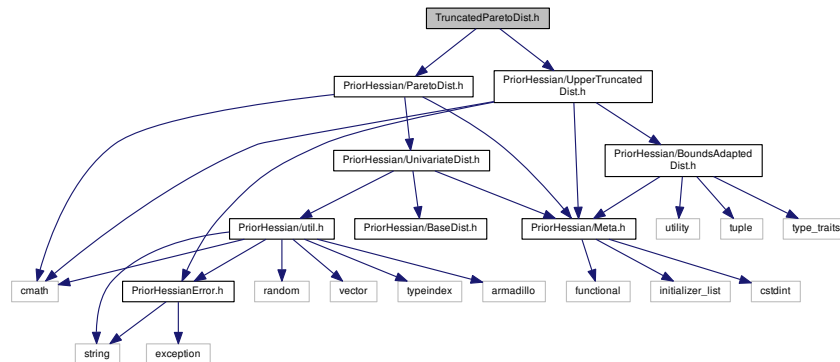

## Classes

- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< ParetoDist >](#)
- struct [prior\\_hessian::detail::dist\\_adaptor\\_traits< TruncatedParetoDist >](#)



## Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::detail](#)

## Typedefs

- using [prior\\_hessian::TruncatedParetoDist](#) = UpperTruncatedDist< ParetoDist >

## Functions

- TruncatedParetoDist [prior\\_hessian::make\\_bounded\\_pareto\\_dist](#) (double alpha, std::pair< double, double > bounds)

### 8.33.1 Detailed Description

TruncatedParetoDist class declaration and templated methods.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date


2017-2019

### 8.34 UnivariateDist.cpp File Reference

UnivariateDist base class method definition.

```
#include "PriorHessian/UnivariateDist.h"
#include "PriorHessian/PriorHessianError.h"
#include <cmath>
#include <sstream>
```

Include dependency graph for UnivariateDist.cpp:

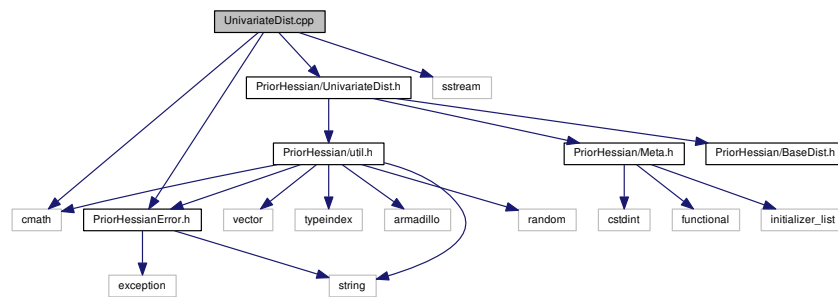

## Namespaces

- [prior\\_hessian](#)

## 8.34.1 Detailed Description

UnivariateDist base class method definition.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.35 UnivariateDist.h File Reference


UnivariateDist base class.

```
#include "PriorHessian/util.h"
#include "PriorHessian/Meta.h"
#include "PriorHessian/BaseDist.h"
```

Include dependency graph for UnivariateDist.h:

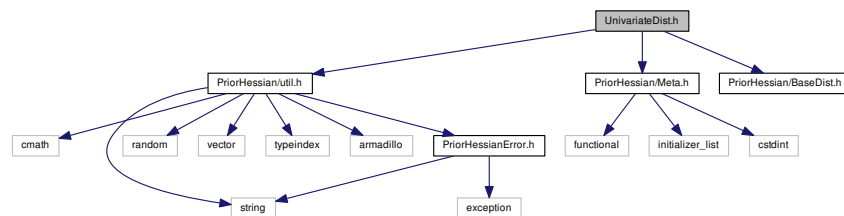

This graph shows which files directly or indirectly include this file:



## Classes

- class [prior\\_hessian::UnivariateDist](#)

## Namespaces

- [prior\\_hessian](#)

## 8.35.1 Detailed Description

UnivariateDist base class.

## Author

Mark J. Olah (mjo@cs.unm DOT edu)

## Date


2017-2019

## 8.36 UpperTruncatedDist.h File Reference


UpperTruncatedDist declaration and templated methods definitions.

```
#include <cmath>
#include "PriorHessian/Meta.h"
#include "PriorHessian/PriorHessianError.h"
#include "PriorHessian/BoundsAdaptedDist.h"
```

Include dependency graph for UpperTruncatedDist.h:

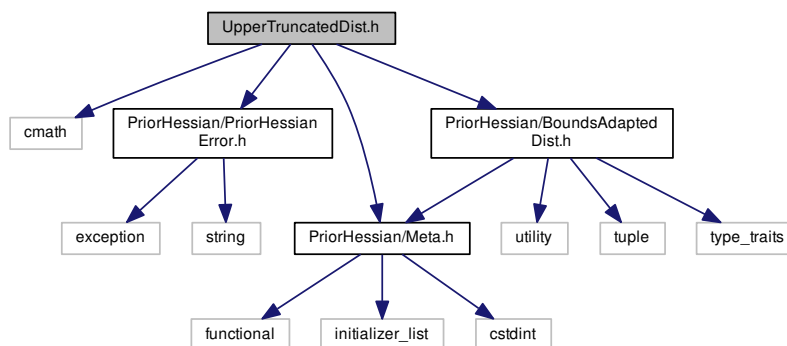

This graph shows which files directly or indirectly include this file:



#### Classes

- class [prior\\_hessian::UpperTruncatedDist< Dist >](#)

#### Namespaces

- [prior\\_hessian](#)

#### 8.36.1 Detailed Description

UpperTruncatedDist declaration and templated methods definitions.

#### Author

Mark J. Olah ([mjo@cs.unm DOT edu](mailto:mjo@cs.unm DOT edu))


#### Date

2017-2019

## 8.37 util.cpp File Reference

Utilities.

```
#include "PriorHessian/util.h"
Include dependency graph for util.cpp:
```

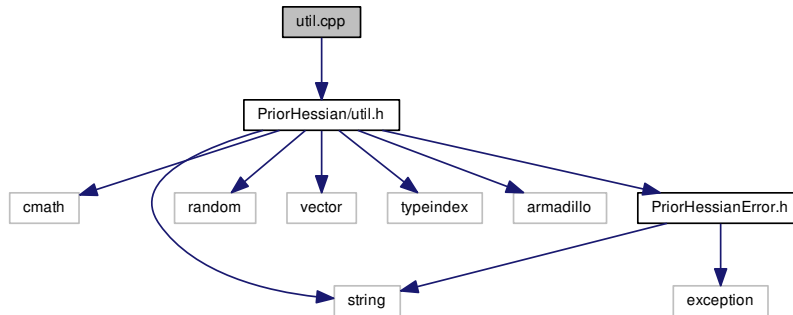

### Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::constants](#)

### Variables

- const double [prior\\_hessian::constants::sqrt2](#) = std::sqrt(2.)
- const double [prior\\_hessian::constants::sqrt2\\_inv](#) = 1./std::sqrt(2.)
- const double [prior\\_hessian::constants::sqrt2pi](#) = std::sqrt(2.\*arma::datum::pi)
- const double [prior\\_hessian::constants::sqrt2pi\\_inv](#) = 1./std::sqrt(2.\*arma::datum::pi)
- const double [prior\\_hessian::constants::log2pi](#) = std::log(2.\*arma::datum::pi)

### 8.37.1 Detailed Description

Utilities.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date


2017-2019

## 8.38 util.h File Reference


Utilities and namespace globals.

```
#include <cmath>
#include <string>
#include <random>
#include <vector>
#include <typeindex>
#include <armadillo>
#include "PriorHessianError.h"
```

Include dependency graph for util.h:

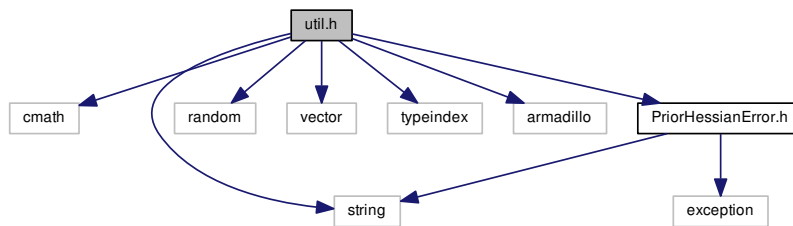

This graph shows which files directly or indirectly include this file:



## Namespaces

- [prior\\_hessian](#)
- [prior\\_hessian::constants](#)

## Typedefs

- using [prior\\_hessian::IdxT](#) = `arma::uword`
- using [prior\\_hessian::UVecT](#) = `arma::Col< IdxT >`
- using [prior\\_hessian::VecT](#) = `arma::Col< double >`
- using [prior\\_hessian::MatT](#) = `arma::Mat< double >`
- using [prior\\_hessian::StringVecT](#) = `std::vector< std::string >`
- using [prior\\_hessian::TypeInfoVecT](#) = `std::vector< std::type_index >`

## Functions

- `template<class T >`  
`T prior_hessian::square (T t)`

### 8.38.1 Detailed Description

Utilities and namespace globals.

#### Author

Mark J. Olah (mjo@cs.unm DOT edu)

#### Date

2017-2019

## Index

- `_scaled_lbound`
    - `prior_hessian::ScaledDist`, [343](#)
  - `_scaled_ubound`
    - `prior_hessian::ScaledDist`, [343](#)
  - `_truncated`
    - `prior_hessian::TruncatedDist`, [375](#)
    - `prior_hessian::TruncatedMultivariateDist`, [381](#)
  - `_truncated_lbound`
    - `prior_hessian::TruncatedDist`, [375](#)
    - `prior_hessian::TruncatedMultivariateDist`, [381](#)
  - `_truncated_ubound`
    - `prior_hessian::TruncatedDist`, [376](#)
    - `prior_hessian::TruncatedMultivariateDist`, [382](#)
- AMHCopula
  - `prior_hessian::AMHCopula`, [49](#)
- AMHCopula.h, [395](#)
- ASSERT\_SETUP
  - PriorHessianError.h, [424](#)
- adaptable\_bounds
  - `prior_hessian::detail::dist_adaptor_traits`, [172](#)
  - `prior_hessian::detail::dist_adaptor_traits< Copula↔DistImpl::CopulaDist< CopulaTemplate, Dist↔Ts... >>`, [173](#)
  - `prior_hessian::detail::dist_adaptor_traits< Gamma↔Dist >`, [174](#)
  - `prior_hessian::detail::dist_adaptor_traits< Multivariate↔NormalDist< Ndim >>`, [175](#)
  - `prior_hessian::detail::dist_adaptor_traits< Normal↔Dist >`, [176](#)
  - `prior_hessian::detail::dist_adaptor_traits< ParetoDist >`, [177](#)
  - `prior_hessian::detail::dist_adaptor_traits< Scaled↔SymmetricBetaDist >`, [178](#)
  - `prior_hessian::detail::dist_adaptor_traits< Symmetric↔BetaDist >`, [179](#)
  - `prior_hessian::detail::dist_adaptor_traits< Truncated↔GammaDist >`, [180](#)
  - `prior_hessian::detail::dist_adaptor_traits< Truncated↔MultivariateNormalDist< Ndim >>`, [181](#)
  - `prior_hessian::detail::dist_adaptor_traits< Truncated↔NormalDist >`, [182](#)
  - `prior_hessian::detail::dist_adaptor_traits< Truncated↔ParetoDist >`, [183](#)
- alpha
  - `prior_hessian::ParetoDist`, [287](#)
- AnyRngT
  - `prior_hessian::CompositeDist`, [93](#)
- append\_global\_lbound
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [80](#)
- append\_global\_ubound
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>`, [69](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [80](#)
- append\_lbound
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>`, [70](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [81](#)
- append\_param\_names
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>`, [70](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [81](#)
- append\_params
  - `prior_hessian::AMHCopula`, [49](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>`, [71](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [82](#)
  - `prior_hessian::MultivariateNormalDist`, [224](#)
- append\_params\_iter
  - `prior_hessian::NormalDist`, [252](#)
- append\_params\_lbound
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>`, [71](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [82](#)
- append\_params\_ubound
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist >>`, [71](#)
  - `prior_hessian::CompositeDist::ComponentDist↔Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist >>`, [82](#)
- append\_sample
  - `MultivariateDist >>`, [69](#)



- prior\_hessian::CompositeDist::ComponentDist↔
  - Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >, 72
- prior\_hessian::CompositeDist::ComponentDist↔
  - Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >, 82
- append\_ubound
  - prior\_hessian::CompositeDist::ComponentDist↔
    - Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >, 72
  - prior\_hessian::CompositeDist::ComponentDist↔
    - Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >, 83
- ArchimedeanCopula.h, 396
- BaseDist.h, 397
- beta
  - prior\_hessian::SymmetricBetaDist, 347
- bounded
  - prior\_hessian, 16
- bounds\_adapted\_dist
  - prior\_hessian::detail::dist\_adaptor\_traits, 171
  - prior\_hessian::detail::dist\_adaptor\_traits< Copula↔
    - DistImpl::CopulaDist< CopulaTemplate, Dist↔
      - Ts... > >, 172
  - prior\_hessian::detail::dist\_adaptor\_traits< Gamma↔
    - Dist >, 173
  - prior\_hessian::detail::dist\_adaptor\_traits< Multivariate↔
    - NormalDist< Ndim > >, 174
  - prior\_hessian::detail::dist\_adaptor\_traits< Normal↔
    - Dist >, 175
  - prior\_hessian::detail::dist\_adaptor\_traits< ParetoDist
    - >, 176
  - prior\_hessian::detail::dist\_adaptor\_traits< Scaled↔
    - SymmetricBetaDist >, 177
  - prior\_hessian::detail::dist\_adaptor\_traits< Symmetric↔
    - BetaDist >, 178
  - prior\_hessian::detail::dist\_adaptor\_traits< Truncated↔
    - GammaDist >, 179
  - prior\_hessian::detail::dist\_adaptor\_traits< Truncated↔
    - MultivariateNormalDist< Ndim > >, 180
  - prior\_hessian::detail::dist\_adaptor\_traits< Truncated↔
    - NormalDist >, 181
  - prior\_hessian::detail::dist\_adaptor\_traits< Truncated↔
    - ParetoDist >, 182
- bounds\_pdf\_integral
  - prior\_hessian::TruncatedDist, 376
  - prior\_hessian::TruncatedMultivariateDist, 382
- BoundsAdaptedDist.h, 398
- BoundsAdaptedDistT
  - prior\_hessian, 14
- call\_in\_order
  - prior\_hessian::meta, 40
- cdf
  - prior\_hessian::AMHCopula, 49
  - prior\_hessian::CompositeDist, 95
  - prior\_hessian::CopulaDistImpl::CopulaDist, 141
  - prior\_hessian::GammaDist, 190
  - prior\_hessian::MultivariateNormalDist, 224, 225
  - prior\_hessian::NormalDist, 252
  - prior\_hessian::ParetoDist, 288
  - prior\_hessian::ScaledDist, 331
  - prior\_hessian::SymmetricBetaDist, 347
  - prior\_hessian::TruncatedDist, 366
  - prior\_hessian::TruncatedMultivariateDist, 379
  - prior\_hessian::UpperTruncatedDist, 388
- cdf\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist↔
    - Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >, 72
  - prior\_hessian::CompositeDist::ComponentDist↔
    - Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >, 83
- check\_bounds
  - prior\_hessian::CopulaDistImpl::CopulaDist, 141
  - prior\_hessian::GammaDist, 191
  - prior\_hessian::MultivariateDist, 219
  - prior\_hessian::MultivariateNormalDist, 225
  - prior\_hessian::NormalDist, 252
  - prior\_hessian::ParetoDist, 289
  - prior\_hessian::SymmetricBetaDist, 348
  - prior\_hessian::UnivariateDist, 384
- check\_copula\_theta
  - prior\_hessian::CopulaDistImpl::CopulaDist, 141
- check\_lbound
  - prior\_hessian::ParetoDist, 290
- check\_mu
  - prior\_hessian::MultivariateNormalDist, 225
- check\_params
  - prior\_hessian::AMHCopula, 50
  - prior\_hessian::CompositeDist, 95
  - prior\_hessian::CopulaDistImpl::CopulaDist, 141
  - prior\_hessian::GammaDist, 191
  - prior\_hessian::MultivariateNormalDist, 225, 226
  - prior\_hessian::NormalDist, 253
  - prior\_hessian::ParetoDist, 290, 291
  - prior\_hessian::SymmetricBetaDist, 348
- check\_params\_iter
  - prior\_hessian::AMHCopula, 50
  - prior\_hessian::CopulaDistImpl::CopulaDist, 142
  - prior\_hessian::GammaDist, 192
  - prior\_hessian::MultivariateNormalDist, 227
  - prior\_hessian::NormalDist, 254
  - prior\_hessian::ParetoDist, 292
  - prior\_hessian::SymmetricBetaDist, 349
- check\_sigma
  - prior\_hessian::MultivariateNormalDist, 228
- check\_theta

- prior\_hessian::AMHCopula, 51
- clear
  - prior\_hessian::CompositeDist, 95
- component\_names
  - prior\_hessian::CompositeDist, 96
- component\_types
  - prior\_hessian::CompositeDist, 96
- ComponentDistAdaptor
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, 69
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, 80
- ComponentDistT
  - prior\_hessian::CompositeDist, 93
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, 69
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, 80
- CompositeDist
  - prior\_hessian::CompositeDist, 93, 94
- CompositeDist.cpp, 400
- CompositeDist.h, 401
- compute\_quadratic\_from\_symmetric
  - prior\_hessian::helpers, 33
- compute\_truncated\_pdf\_integral
  - prior\_hessian::TruncatedMultivariateDist, 379
- condition
  - prior\_hessian::IndexError, 207
  - prior\_hessian::InvalidOperationError, 210
  - prior\_hessian::NotImplementedError, 274
  - prior\_hessian::NumericalOverflowError, 276
  - prior\_hessian::ParameterNameError, 278
  - prior\_hessian::ParameterNameUniquenessError,  
280
  - prior\_hessian::ParameterSizeError, 282
  - prior\_hessian::ParameterValueError, 284
  - prior\_hessian::PriorHessianError, 321
  - prior\_hessian::RuntimeConvergenceError, 323
  - prior\_hessian::RuntimeSamplingError, 325
  - prior\_hessian::RuntimeTypeError, 327
- constexpr\_accumulate
  - prior\_hessian::meta, 40
- ConstructableIf
  - prior\_hessian::meta, 37
- ConstructableIfAllAreNotTupleAndAreNotT
  - prior\_hessian::meta, 37
- ConstructableIfAllDistsAreBoundedT
  - prior\_hessian::meta, 37
- ConstructableIfInstantiatedFromNumericT
  - prior\_hessian::meta, 37
- ConstructableIfsCopulaT
  - prior\_hessian::meta, 37
- ConstructableIfsSuperClassForAllT
  - prior\_hessian::meta, 37
- ConstructableIfsSuperClassT
  - prior\_hessian::meta, 37
- ConstructableIfsTemplateForAllT
  - prior\_hessian::meta, 37
- ConstructableIfNot
  - prior\_hessian::meta, 37
- ConstructableIfNotAllDistsAreBoundedT
  - prior\_hessian::meta, 38
- ConstructableIfNotSelfT
  - prior\_hessian::meta, 38
- convert\_from\_unitary\_coords
  - prior\_hessian::ScaledDist, 331
- convert\_to\_unitary\_coords
  - prior\_hessian::ScaledDist, 332
- copula.h, 403
- CopulaDist
  - prior\_hessian, 14
  - prior\_hessian::CopulaDistImpl::CopulaDist, 140
- CopulaDist.h, 404
- CopulaT
  - prior\_hessian::CopulaDistImpl::CopulaDist, 139
- d1\_igen
  - prior\_hessian::AMHCopula, 51
- d1\_igen\_ui
  - prior\_hessian::ArchimedeanCopula::D2\_IGenTerms,  
162
  - prior\_hessian::ArchimedeanCopula::D\_IGenTerms,  
167
- d2\_igen\_ui
  - prior\_hessian::ArchimedeanCopula::D2\_IGenTerms,  
162
- DEBUG\_ASSERT
  - PriorHessianError.h, 424
- ddim\_gen
  - prior\_hessian::AMHCopula, 52
- DerivedFrom
  - prior\_hessian::meta, 38
- dim\_variables
  - prior\_hessian::CompositeDist, 97
- DistTraitsT
  - prior\_hessian::detail, 30
- donnely\_bvn\_cdf
  - prior\_hessian, 16
- donnely\_bvn\_integral
  - prior\_hessian, 16
- donnely\_bvn\_integral\_orig
  - prior\_hessian, 17
- EnableIfAllAreNotTupleT
  - prior\_hessian::meta, 38

- EnableIfInstantiatedFromNumericT
  - prior\_hessian::meta, [38](#)
- EnableIfInstantiatedFromT
  - prior\_hessian::meta, [38](#)
- EnableIfIsNotTupleAndIsNotSelfT
  - prior\_hessian::meta, [38](#)
- EnableIfIsNotTupleT
  - prior\_hessian::meta, [38](#)
- EnableIfIsSuperclassOfAllT
  - prior\_hessian::meta, [38](#)
- EnableIfIsTemplateForAllT
  - prior\_hessian::meta, [39](#)
- EnableIfNotEmpty
  - prior\_hessian::meta, [39](#)
- EnableIfNotInstantiatedFromT
  - prior\_hessian::meta, [39](#)
- EnableIfNotIsSelfT
  - prior\_hessian::meta, [39](#)
- EnableIfSubclassOfNumericTemplateT
  - prior\_hessian::meta, [39](#)
- EnableIfSubclassT
  - prior\_hessian::meta, [39](#)
- eta\_0n\_1n\_t
  - prior\_hessian::ArchimedeanCopula::D2Theta\_↔  
GenTerms, [164](#)
  - prior\_hessian::ArchimedeanCopula::DTheta\_Gen↔  
Terms, [183](#)
- eta\_n\_np1\_t
  - prior\_hessian::ArchimedeanCopula::D2\_GenTerms,  
[161](#)
  - prior\_hessian::ArchimedeanCopula::D\_GenTerms,  
[166](#)
- eulerian\_polynomial
  - prior\_hessian, [18](#)
  - prior\_hessian::detail, [30](#)
  - prior\_hessian::polylog, [43](#)
- eulerian\_polynomial< 0 >
  - prior\_hessian::polylog, [43](#)
- eulerian\_polynomial< 1 >
  - prior\_hessian::polylog, [43](#)
- eulerian\_polynomial< 2 >
  - prior\_hessian::polylog, [43](#)
- eulerian\_polynomial< 3 >
  - prior\_hessian::polylog, [43](#)
- eulerian\_polynomial< 4 >
  - prior\_hessian::polylog, [44](#)
- eulerian\_polynomial< 5 >
  - prior\_hessian::polylog, [44](#)
- eulerian\_polynomial< 6 >
  - prior\_hessian::polylog, [44](#)
- eulerian\_polynomial< 7 >
  - prior\_hessian::polylog, [44](#)
- eulerian\_polynomial< 8 >
  - prior\_hessian::polylog, [44](#)
- eulerian\_polynomial< 9 >
  - prior\_hessian::polylog, [44](#)
- EulerianPolynomial.h, [405](#)
- GCC\_VERSION
  - Meta.h, [411](#)
- GammaDist
  - prior\_hessian::GammaDist, [189](#), [190](#)
- GammaDist.cpp, [406](#)
- GammaDist.h, [407](#)
- gen
  - prior\_hessian::AMHCopula, [53](#)
- get\_copula\_theta
  - prior\_hessian::CopulaDistImpl::CopulaDist, [142](#)
- get\_dim\_variable\_index
  - prior\_hessian::CompositeDist, [97](#)
- get\_dist\_tuple
  - prior\_hessian::CompositeDist, [98](#)
- get\_param
  - prior\_hessian::GammaDist, [192](#)
  - prior\_hessian::MultivariateNormalDist, [228](#)
  - prior\_hessian::NormalDist, [255](#)
  - prior\_hessian::ParetoDist, [293](#)
  - prior\_hessian::SymmetricBetaDist, [350](#)
- get\_param\_index
  - prior\_hessian::CompositeDist, [98](#)
- get\_param\_value
  - prior\_hessian::CompositeDist, [98](#)
- global\_lbound
  - prior\_hessian::CompositeDist, [99](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [143](#)
  - prior\_hessian::ParetoDist, [294](#)
  - prior\_hessian::ScaledDist, [333](#)
  - prior\_hessian::TruncatedDist, [366](#)
  - prior\_hessian::TruncatedMultivariateDist, [380](#)
- global\_ubound
  - prior\_hessian::CompositeDist, [99](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [143](#)
  - prior\_hessian::ScaledDist, [333](#)
  - prior\_hessian::TruncatedDist, [366](#)
  - prior\_hessian::TruncatedMultivariateDist, [380](#)
  - prior\_hessian::UpperTruncatedDist, [388](#)
- grad
  - prior\_hessian::AMHCopula, [53](#)
  - prior\_hessian::CompositeDist, [100](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [144](#)
  - prior\_hessian::GammaDist, [193](#)
  - prior\_hessian::MultivariateNormalDist, [228](#)
  - prior\_hessian::NormalDist, [255](#)
  - prior\_hessian::ParetoDist, [294](#)
  - prior\_hessian::SymmetricBetaDist, [350](#)
- grad2
  - prior\_hessian::AMHCopula, [54](#)
  - prior\_hessian::CompositeDist, [101](#)

- prior\_hessian::CopulaDistImpl::CopulaDist, [145](#)
- prior\_hessian::GammaDist, [193](#)
- prior\_hessian::MultivariateNormalDist, [229](#)
- prior\_hessian::NormalDist, [256](#)
- prior\_hessian::ParetoDist, [295](#)
- prior\_hessian::SymmetricBetaDist, [351](#)
- grad2\_accumulate
  - prior\_hessian::CompositeDist, [102](#)
- grad2\_accumulate\_idx
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, [73](#)
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, [84](#)
- grad\_accumulate
  - prior\_hessian::CompositeDist, [103](#)
- grad\_accumulate\_idx
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, [73](#)
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, [84](#)
- grad\_grad2\_accumulate
  - prior\_hessian::CompositeDist, [103](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [145](#)
  - prior\_hessian::GammaDist, [193](#)
  - prior\_hessian::MultivariateNormalDist, [230](#)
  - prior\_hessian::NormalDist, [257](#)
  - prior\_hessian::ParetoDist, [296](#)
  - prior\_hessian::SymmetricBetaDist, [351](#)
- grad\_grad2\_accumulate\_idx
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, [74](#)
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, [84](#)
- grad\_hess\_accumulate
  - prior\_hessian::CompositeDist, [104](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [145](#)
  - prior\_hessian::MultivariateNormalDist, [231](#)
- grad\_hess\_accumulate\_idx
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, [74](#)
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, [85](#)
- has\_dim\_variable
  - prior\_hessian::CompositeDist, [104](#)
- has\_param
  - prior\_hessian::CompositeDist, [105](#)
- hess
  - prior\_hessian::AMHCopula, [54](#)
  - prior\_hessian::CompositeDist, [105](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [146](#)
  - prior\_hessian::MultivariateNormalDist, [231](#)
- hess\_accumulate
  - prior\_hessian::CompositeDist, [106](#)
- hess\_accumulate\_idx
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, [74](#)
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, [85](#)
- icdf
  - prior\_hessian::GammaDist, [194](#)
  - prior\_hessian::NormalDist, [257](#)
  - prior\_hessian::ParetoDist, [297](#)
  - prior\_hessian::ScaledDist, [333](#)
  - prior\_hessian::SymmetricBetaDist, [352](#)
  - prior\_hessian::TruncatedDist, [367](#)
  - prior\_hessian::UpperTruncatedDist, [388](#)
- IdxT
  - prior\_hessian, [14](#)
- ieta\_21\_ui
  - prior\_hessian::ArchimedeanCopula::D2\_IGenTerms,  
[162](#)
  - prior\_hessian::ArchimedeanCopula::D\_IGenTerms,  
[167](#)
- igen
  - prior\_hessian::AMHCopula, [55](#)
- igen\_sum
  - prior\_hessian::AMHCopula, [55](#)
- in\_bounds
  - prior\_hessian::CompositeDist, [106](#)
  - prior\_hessian::GammaDist, [194](#)
  - prior\_hessian::MultivariateNormalDist, [232](#)
  - prior\_hessian::NormalDist, [258](#)
  - prior\_hessian::ParetoDist, [298](#)
  - prior\_hessian::SymmetricBetaDist, [352](#)
  - prior\_hessian::TruncatedMultivariateDist, [380](#)
- in\_bounds\_all
  - prior\_hessian::CompositeDist, [107](#)
- IndexError
  - prior\_hessian::IndexError, [207](#)
- initialize
  - prior\_hessian::CompositeDist, [107–109](#)
- initialize\_copula
  - prior\_hessian::CopulaDistImpl::CopulaDist, [146](#)
- initialize\_marginals
  - prior\_hessian::CopulaDistImpl::CopulaDist, [147](#)
- InvalidOperationError

- prior\_hessian::InvalidOperationError, 209
- is\_empty
  - prior\_hessian::CompositeDist, 110
- ixi\_1\_ui
  - prior\_hessian::ArchimedeanCopula::D2\_I GenTerms, 162
- lbound
  - prior\_hessian::CompositeDist, 110
  - prior\_hessian::CopulaDistImpl::CopulaDist, 147
  - prior\_hessian::GammaDist, 195
  - prior\_hessian::MultivariateNormalDist, 233
  - prior\_hessian::NormalDist, 258
  - prior\_hessian::ParetoDist, 299
  - prior\_hessian::ScaledDist, 334
  - prior\_hessian::SymmetricBetaDist, 353
  - prior\_hessian::TruncatedDist, 367
  - prior\_hessian::TruncatedMultivariateDist, 380
- lbound\_cdf
  - prior\_hessian::TruncatedDist, 376
  - prior\_hessian::TruncatedMultivariateDist, 382
- llh
  - prior\_hessian::AMHCopula, 56
  - prior\_hessian::CompositeDist, 111
  - prior\_hessian::CopulaDistImpl::CopulaDist, 147
  - prior\_hessian::GammaDist, 195
  - prior\_hessian::MultivariateNormalDist, 234
  - prior\_hessian::NormalDist, 259
  - prior\_hessian::ParetoDist, 301
  - prior\_hessian::ScaledDist, 335
  - prior\_hessian::SymmetricBetaDist, 353
  - prior\_hessian::TruncatedDist, 368
  - prior\_hessian::TruncatedMultivariateDist, 380
  - prior\_hessian::UpperTruncatedDist, 389
- llh\_components
  - prior\_hessian::CompositeDist, 111
- llh\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist↔ Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >, 75
  - prior\_hessian::CompositeDist::ComponentDist↔ Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >, 86
- llh\_scaling\_const
  - prior\_hessian::ScaledDist, 343
- llh\_truncation\_const
  - prior\_hessian::TruncatedDist, 376
  - prior\_hessian::TruncatedMultivariateDist, 382
- log2pi
  - prior\_hessian::constants, 29
- log\_dn\_gen\_t
  - prior\_hessian::ArchimedeanCopula::D2\_GenTerms, 161
- prior\_hessian::ArchimedeanCopula::D2Theta↔ GenTerms, 164
- prior\_hessian::ArchimedeanCopula::D\_GenTerms, 166
- prior\_hessian::ArchimedeanCopula::DTheta↔ GenTerms, 183
- logical\_and\_in\_order
  - prior\_hessian::meta, 41
- MCMCData
  - prior\_hessian::mcmc::MCMCData, 217
- make\_adapted\_bounded\_dist
  - prior\_hessian, 18, 19
- make\_adapted\_bounded\_dist\_tuple
  - prior\_hessian, 19, 20
  - prior\_hessian::detail, 30, 31
- make\_bounded\_gamma\_dist
  - prior\_hessian, 20
- make\_bounded\_multivariate\_normal\_dist
  - prior\_hessian, 20
- make\_bounded\_normal\_dist
  - prior\_hessian, 20
- make\_bounded\_pareto\_dist
  - prior\_hessian, 20
- make\_component\_dist
  - prior\_hessian::CompositeDist, 112
- make\_component\_dist\_tuple
  - prior\_hessian::CompositeDist, 113, 114
- make\_copula\_dist
  - prior\_hessian, 21
- make\_scaled\_symmetric\_beta\_dist
  - prior\_hessian, 21
- make\_zero\_grad
  - prior\_hessian::CompositeDist, 115
- make\_zero\_hess
  - prior\_hessian::CompositeDist, 115
- MarginalDistTupleT
  - prior\_hessian::CopulaDistImpl::CopulaDist, 139
- MarginalDistT
  - prior\_hessian::CopulaDistImpl::CopulaDist, 139
- MatT
  - prior\_hessian, 14
- mc\_mvn\_cdf
  - prior\_hessian, 21
- mc\_mvn\_cdf\_core
  - prior\_hessian, 21
- mc\_mvn\_integral
  - prior\_hessian, 22
- mean
  - prior\_hessian::GammaDist, 196
  - prior\_hessian::MultivariateNormalDist, 234
  - prior\_hessian::NormalDist, 259
  - prior\_hessian::ParetoDist, 302
  - prior\_hessian::ScaledDist, 335

- prior\_hessian::SymmetricBetaDist, [354](#)
- prior\_hessian::TruncatedDist, [368](#)
- prior\_hessian::TruncatedMultivariateDist, [380](#)
- prior\_hessian::UpperTruncatedDist, [389](#)
- median
  - prior\_hessian::GammaDist, [196](#)
  - prior\_hessian::NormalDist, [260](#)
  - prior\_hessian::ParetoDist, [304](#)
  - prior\_hessian::ScaledDist, [336](#)
  - prior\_hessian::SymmetricBetaDist, [354](#)
  - prior\_hessian::TruncatedDist, [368](#)
  - prior\_hessian::UpperTruncatedDist, [389](#)
- Meta.h, [408](#)
  - GCC\_VERSION, [411](#)
  - PRIOR\_HESSIAN\_META\_CONSTEXPR, [411](#)
  - PRIOR\_HESSIAN\_META\_HAS\_CONSTEXPR, [411](#)
- min
  - prior\_hessian::ParetoDist, [305](#)
- min\_bounds\_pdf\_integral
  - prior\_hessian::TruncatedDist, [376](#)
  - prior\_hessian::TruncatedMultivariateDist, [382](#)
- mode
  - prior\_hessian::MultivariateNormalDist, [235](#)
- mu
  - prior\_hessian::MultivariateNormalDist, [235](#)
  - prior\_hessian::NormalDist, [260](#)
- MultivariateDist
  - prior\_hessian::MultivariateDist, [219](#)
- MultivariateDist.h, [412](#)
- MultivariateNormalDist
  - prior\_hessian::MultivariateNormalDist, [223](#)
- MultivariateNormalDist.h, [413](#)
- mutex
  - prior\_hessian::mcmc::MCMCData, [218](#)
- mvn\_cdf.cpp, [414](#)
- mvn\_cdf.h, [415](#)
- mvn\_cdf\_genz
  - prior\_hessian::genz, [32](#)
- mvndst\_
  - prior\_hessian::genz::fortran, [33](#)
- NdimMatT
  - prior\_hessian::AMHCopula, [48](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [139](#)
  - prior\_hessian::MultivariateNormalDist, [222](#)
- NdimVecT
  - prior\_hessian::AMHCopula, [48](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [140](#)
  - prior\_hessian::MultivariateNormalDist, [222](#)
  - prior\_hessian::mcmc::MCMCData, [217](#)
- NormalDist
  - prior\_hessian::NormalDist, [251](#)
- NormalDist.cpp, [417](#)
- NormalDist.h, [418](#)
- NotImplementedError
  - prior\_hessian::NotImplementedError, [273](#)
- NparamsVecT
  - prior\_hessian::CopulaDistImpl::CopulaDist, [140](#)
  - prior\_hessian::GammaDist, [189](#)
  - prior\_hessian::MultivariateNormalDist, [222](#)
  - prior\_hessian::NormalDist, [250](#)
  - prior\_hessian::ParetoDist, [286](#)
  - prior\_hessian::SymmetricBetaDist, [346](#)
- nsample
  - prior\_hessian::mcmc::MCMCData, [218](#)
- num\_components
  - prior\_hessian::CompositeDist, [115](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [148](#)
- num\_dim
  - prior\_hessian::AMHCopula, [57](#)
  - prior\_hessian::CompositeDist, [116](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [148](#)
  - prior\_hessian::GammaDist, [197](#)
  - prior\_hessian::MultivariateNormalDist, [236](#)
  - prior\_hessian::NormalDist, [261](#)
  - prior\_hessian::ParetoDist, [306](#)
  - prior\_hessian::SymmetricBetaDist, [354](#)
  - prior\_hessian::UnivariateDist, [384](#)
- num\_dim\_components
  - prior\_hessian::CompositeDist, [117](#)
- num\_params
  - prior\_hessian::AMHCopula, [57](#)
  - prior\_hessian::CompositeDist, [117](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [149](#)
  - prior\_hessian::GammaDist, [197](#)
  - prior\_hessian::MultivariateNormalDist, [237](#)
  - prior\_hessian::NormalDist, [261](#)
  - prior\_hessian::ParetoDist, [306](#)
  - prior\_hessian::SymmetricBetaDist, [354](#)
  - prior\_hessian::TruncatedDist, [369](#)
- num\_params\_components
  - prior\_hessian::CompositeDist, [117](#)
- NumericalOverflowError
  - prior\_hessian::NumericalOverflowError, [275](#)
- operator bool
  - prior\_hessian::CompositeDist, [118](#)
- operator!=
  - prior\_hessian::AMHCopula, [57](#)
  - prior\_hessian::CompositeDist, [118](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [149](#)
  - prior\_hessian::GammaDist, [197](#)
  - prior\_hessian::MultivariateNormalDist, [237](#)
  - prior\_hessian::NormalDist, [261](#)
  - prior\_hessian::ParetoDist, [306](#)
  - prior\_hessian::ScaledDist, [336](#)
  - prior\_hessian::SymmetricBetaDist, [355](#)
  - prior\_hessian::TruncatedDist, [369](#)



- prior\_hessian::TruncatedMultivariateDist, 380
- prior\_hessian::UpperTruncatedDist, 390
- operator<<
  - prior\_hessian, 23
- operator=
  - prior\_hessian::CompositeDist, 118, 119
  - prior\_hessian::mcmc::MCMCData, 217
- operator==
  - prior\_hessian::AMHCopula, 57
  - prior\_hessian::CompositeDist, 119
  - prior\_hessian::CopulaDistImpl::CopulaDist, 151
  - prior\_hessian::GammaDist, 197
  - prior\_hessian::MultivariateNormalDist, 238
  - prior\_hessian::NormalDist, 262
  - prior\_hessian::ParetoDist, 307
  - prior\_hessian::ScaledDist, 337
  - prior\_hessian::SymmetricBetaDist, 355
  - prior\_hessian::TruncatedDist, 369
  - prior\_hessian::TruncatedMultivariateDist, 380
  - prior\_hessian::UpperTruncatedDist, 390
- owen\_b\_integral
  - prior\_hessian, 24
- owen\_bvn\_cdf
  - prior\_hessian, 25
- owen\_t\_integral
  - prior\_hessian, 26
- PRIOR\_HESSIAN\_META\_CONSTEXPR
  - Meta.h, 411
- PRIOR\_HESSIAN\_META\_HAS\_CONSTEXPR
  - Meta.h, 411
- param\_lbound
  - prior\_hessian::AMHCopula, 58
  - prior\_hessian::CopulaDistImpl::CopulaDist, 152
  - prior\_hessian::GammaDist, 198
  - prior\_hessian::MultivariateNormalDist, 238
  - prior\_hessian::NormalDist, 262
  - prior\_hessian::ParetoDist, 307
  - prior\_hessian::SymmetricBetaDist, 355
- param\_names
  - prior\_hessian::AMHCopula, 58
  - prior\_hessian::CompositeDist, 119
  - prior\_hessian::CopulaDistImpl::CopulaDist, 152
  - prior\_hessian::GammaDist, 198
  - prior\_hessian::MultivariateNormalDist, 239
  - prior\_hessian::NormalDist, 263
  - prior\_hessian::ParetoDist, 308
  - prior\_hessian::SymmetricBetaDist, 356
- param\_ubound
  - prior\_hessian::AMHCopula, 58
  - prior\_hessian::CopulaDistImpl::CopulaDist, 153
  - prior\_hessian::GammaDist, 198
  - prior\_hessian::MultivariateNormalDist, 239
  - prior\_hessian::NormalDist, 263
- prior\_hessian::ParetoDist, 308
- prior\_hessian::SymmetricBetaDist, 356
- ParameterNameError
  - prior\_hessian::ParameterNameError, 277
- ParameterNameUniquenessError
  - prior\_hessian::ParameterNameUniquenessError, 279
- ParameterSizeError
  - prior\_hessian::ParameterSizeError, 281
- ParameterValueError
  - prior\_hessian::ParameterValueError, 283
- params
  - prior\_hessian::CompositeDist, 120
  - prior\_hessian::CopulaDistImpl::CopulaDist, 153
  - prior\_hessian::GammaDist, 198
  - prior\_hessian::MultivariateNormalDist, 239
  - prior\_hessian::NormalDist, 263
  - prior\_hessian::ParetoDist, 308
  - prior\_hessian::SymmetricBetaDist, 356
- params\_components
  - prior\_hessian::CompositeDist, 121
- params\_lbound
  - prior\_hessian::CompositeDist, 122
- params\_ubound
  - prior\_hessian::CompositeDist, 122
- ParetoDist
  - prior\_hessian::ParetoDist, 287
- ParetoDist.cpp, 419
- ParetoDist.h, 420
- pdf
  - prior\_hessian::AMHCopula, 58
  - prior\_hessian::CompositeDist, 123
  - prior\_hessian::CopulaDistImpl::CopulaDist, 154
  - prior\_hessian::GammaDist, 199
  - prior\_hessian::MultivariateNormalDist, 240
  - prior\_hessian::NormalDist, 264
  - prior\_hessian::ParetoDist, 309
  - prior\_hessian::ScaledDist, 337
  - prior\_hessian::SymmetricBetaDist, 357
  - prior\_hessian::TruncatedDist, 370
  - prior\_hessian::TruncatedMultivariateDist, 380
  - prior\_hessian::UpperTruncatedDist, 391
- pdf\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist←  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, 75
  - prior\_hessian::CompositeDist::ComponentDist←  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, 86
- PolyLog.h, 421
- polylog
  - prior\_hessian::polylog, 44
- polylog< 1 >
  - prior\_hessian::polylog, 45

- prior\_hessian, 12
  - bounded, 16
  - BoundsAdaptedDistT, 14
  - CopulaDist, 14
  - donnely\_bvn\_cdf, 16
  - donnely\_bvn\_integral, 16
  - donnely\_bvn\_integral\_orig, 17
  - eulerian\_polynomial, 18
  - IdxT, 14
  - make\_adapted\_bounded\_dist, 18, 19
  - make\_adapted\_bounded\_dist\_tuple, 19, 20
  - make\_bounded\_gamma\_dist, 20
  - make\_bounded\_multivariate\_normal\_dist, 20
  - make\_bounded\_normal\_dist, 20
  - make\_bounded\_pareto\_dist, 20
  - make\_copula\_dist, 21
  - make\_scaled\_symmetric\_beta\_dist, 21
  - MatT, 14
  - mc\_mvn\_cdf, 21
  - mc\_mvn\_cdf\_core, 21
  - mc\_mvn\_integral, 22
  - operator<<, 23
  - owen\_b\_integral, 24
  - owen\_bvn\_cdf, 25
  - owen\_t\_integral, 26
  - ScaledSymmetricBetaDist, 14
  - square, 27
  - StringVecT, 15
  - TruncatedGammaDist, 15
  - TruncatedMultivariateNormalDist, 15
  - TruncatedNormalDist, 15
  - TruncatedParetoDist, 15
  - TypeInfoVecT, 15
  - UVecT, 15
  - unit\_normal\_cdf, 27
  - unit\_normal\_icdf, 28
  - VecT, 15
- prior\_hessian::AMHCopula
  - AMHCopula, 49
  - append\_params, 49
  - cdf, 49
  - check\_params, 50
  - check\_params\_iter, 50
  - check\_theta, 51
  - d1\_igen, 51
  - ddim\_gen, 52
  - gen, 53
  - grad, 53
  - grad2, 54
  - hess, 54
  - igen, 55
  - igen\_sum, 55
  - llh, 56
  - NdimMatT, 48
  - NdimVecT, 48
  - num\_dim, 57
  - num\_params, 57
  - operator!=, 57
  - operator==, 57
  - param\_lbound, 58
  - param\_names, 58
  - param\_ubound, 58
  - pdf, 58
  - rllh, 59
  - rllh\_const, 59
  - rllh\_d2theta\_accumulate, 60
  - rllh\_dtheta\_accumulate, 60
  - rllh\_grad\_accumulate, 60
  - rllh\_grad\_grad2\_accumulate, 61
  - rllh\_grad\_hess\_accumulate, 61
  - sample, 61
  - set\_params, 62
  - set\_params\_iter, 62
  - set\_theta, 63
  - theta, 64
- prior\_hessian::AMHCopula< Ndim >, 46
- prior\_hessian::ArchimedeanCopula, 65
- prior\_hessian::ArchimedeanCopula::D2\_GenTerms, 159
  - eta\_n\_np1\_t, 161
  - log\_dn\_gen\_t, 161
  - xi\_n\_t, 161
- prior\_hessian::ArchimedeanCopula::D2\_IGenTerms, 161
  - d1\_igen\_ui, 162
  - d2\_igen\_ui, 162
  - ieta\_21\_ui, 162
  - ixi\_1\_ui, 162
- prior\_hessian::ArchimedeanCopula::D2Theta\_GenTerms, 163
  - eta\_0n\_1n\_t, 164
  - log\_dn\_gen\_t, 164
  - xi\_0n\_t, 164
- prior\_hessian::ArchimedeanCopula::D2Theta\_IGenTerms, 164
  - sum\_d10\_igen\_u, 165
  - sum\_d20\_igen\_u, 165
  - sum\_ieta\_01\_11\_u, 165
  - sum\_ixi\_01\_u, 165
  - sum\_log\_d1\_igen\_u, 165
- prior\_hessian::ArchimedeanCopula::D\_GenTerms, 166
  - eta\_n\_np1\_t, 166
  - log\_dn\_gen\_t, 166
- prior\_hessian::ArchimedeanCopula::D\_IGenTerms, 167
  - d1\_igen\_ui, 167
  - ieta\_21\_ui, 167
- prior\_hessian::ArchimedeanCopula::DTheta\_GenTerms, 183
  - eta\_0n\_1n\_t, 183
  - log\_dn\_gen\_t, 183



- prior\_hessian::ArchimedeanCopula::DTheta\_IGenTerms, 184
  - sum\_d10\_igen\_u, 184
  - sum\_ieta\_01\_11\_u, 184
  - sum\_log\_d1\_igen\_u, 185
- prior\_hessian::BaseDist, 66
- prior\_hessian::CompositeDist, 89
  - AnyRngT, 93
  - cdf, 95
  - check\_params, 95
  - clear, 95
  - component\_names, 96
  - component\_types, 96
  - ComponentDistT, 93
  - CompositeDist, 93, 94
  - dim\_variables, 97
  - get\_dim\_variable\_index, 97
  - get\_dist\_tuple, 98
  - get\_param\_index, 98
  - get\_param\_value, 98
  - global\_lbound, 99
  - global\_ubound, 99
  - grad, 100
  - grad2, 101
  - grad2\_accumulate, 102
  - grad\_accumulate, 103
  - grad\_grad2\_accumulate, 103
  - grad\_hess\_accumulate, 104
  - has\_dim\_variable, 104
  - has\_param, 105
  - hess, 105
  - hess\_accumulate, 106
  - in\_bounds, 106
  - in\_bounds\_all, 107
  - initialize, 107–109
  - is\_empty, 110
  - lbound, 110
  - llh, 111
  - llh\_components, 111
  - make\_component\_dist, 112
  - make\_component\_dist\_tuple, 113, 114
  - make\_zero\_grad, 115
  - make\_zero\_hess, 115
  - num\_components, 115
  - num\_dim, 116
  - num\_dim\_components, 117
  - num\_params, 117
  - num\_params\_components, 117
  - operator bool, 118
  - operator!=, 118
  - operator=, 118, 119
  - operator==, 119
  - param\_names, 119
  - params, 120
  - params\_components, 121
  - params\_lbound, 122
  - params\_ubound, 122
  - pdf, 123
  - rename\_dim\_variable, 123
  - rename\_param, 124
  - rllh, 124
  - rllh\_components, 125
  - sample, 126, 127
  - set\_bounds, 127
  - set\_component\_names, 128
  - set\_dim\_variables, 129
  - set\_lbound, 129
  - set\_param\_names, 130
  - set\_param\_value, 131
  - set\_params, 132
  - set\_ubound, 132
  - ubound, 133
- prior\_hessian::CompositeDist::ComponentDistAdaptor, 92, 403
- prior\_hessian::CompositeDist::ComponentDistAdaptor<
  - Dist, meta::EnableIfSubclassT< Dist, Multivariate←
  - Dist > >, 67
  - append\_global\_lbound, 69
  - append\_global\_ubound, 69
  - append\_lbound, 70
  - append\_param\_names, 70
  - append\_params, 71
  - append\_params\_lbound, 71
  - append\_params\_ubound, 71
  - append\_sample, 72
  - append\_ubound, 72
  - cdf\_from\_iter, 72
  - ComponentDistAdaptor, 69
  - ComponentDistT, 69
  - grad2\_accumulate\_idx, 73
  - grad\_accumulate\_idx, 73
  - grad\_grad2\_accumulate\_idx, 74
  - grad\_hess\_accumulate\_idx, 74
  - hess\_accumulate\_idx, 74
  - llh\_from\_iter, 75
  - pdf\_from\_iter, 75
  - rllh\_from\_iter, 76
  - set\_bounds\_from\_iter, 76
  - set\_lbound\_from\_iter, 77
  - set\_ubound\_from\_iter, 77
- prior\_hessian::CompositeDist::ComponentDistAdaptor<
  - Dist, meta::EnableIfSubclassT< Dist, Univariate←
  - Dist > >, 78
  - append\_global\_lbound, 80
  - append\_global\_ubound, 80
  - append\_lbound, 81
  - append\_param\_names, 81
  - append\_params, 82

- append\_params\_lbound, 82
- append\_params\_ubound, 82
- append\_sample, 82
- append\_ubound, 83
- cdf\_from\_iter, 83
- ComponentDistAdaptor, 80
- ComponentDistT, 80
- grad2\_accumulate\_idx, 84
- grad\_accumulate\_idx, 84
- grad\_grad2\_accumulate\_idx, 84
- grad\_hess\_accumulate\_idx, 85
- hess\_accumulate\_idx, 85
- llh\_from\_iter, 86
- pdf\_from\_iter, 86
- rllh\_from\_iter, 87
- set\_bounds\_from\_iter, 87
- set\_lbound\_from\_iter, 88
- set\_ubound\_from\_iter, 88
- prior\_hessian::CopulaDistImpl, 29
- prior\_hessian::CopulaDistImpl::CopulaDist
  - cdf, 141
  - check\_bounds, 141
  - check\_copula\_theta, 141
  - check\_params, 141
  - check\_params\_iter, 142
  - CopulaDist, 140
  - CopulaT, 139
  - get\_copula\_theta, 142
  - global\_lbound, 143
  - global\_ubound, 143
  - grad, 144
  - grad2, 145
  - grad\_grad2\_accumulate, 145
  - grad\_hess\_accumulate, 145
  - hess, 146
  - initialize\_copula, 146
  - initialize\_marginals, 147
  - lbound, 147
  - llh, 147
  - MarginalDistTupleT, 139
  - MarginalDistT, 139
  - NdimMatT, 139
  - NdimVecT, 140
  - NparamsVecT, 140
  - num\_components, 148
  - num\_dim, 148
  - num\_params, 149
  - operator!=, 149
  - operator==, 151
  - param\_lbound, 152
  - param\_names, 152
  - param\_ubound, 153
  - params, 153
  - pdf, 154
  - rllh, 154
  - sample, 154
  - set\_bounds, 155
  - set\_copula\_theta, 155
  - set\_lbound, 156
  - set\_params, 157
  - set\_params\_iter, 157
  - set\_ubound, 157
  - ubound, 158
- prior\_hessian::CopulaDistImpl::CopulaDist< Copula←  
Template, MarginalDistTs >, 137
- prior\_hessian::GammaDist, 187
  - cdf, 190
  - check\_bounds, 191
  - check\_params, 191
  - check\_params\_iter, 192
  - GammaDist, 189, 190
  - get\_param, 192
  - grad, 193
  - grad2, 193
  - grad\_grad2\_accumulate, 193
  - icdf, 194
  - in\_bounds, 194
  - lbound, 195
  - llh, 195
  - mean, 196
  - median, 196
  - NparamsVecT, 189
  - num\_dim, 197
  - num\_params, 197
  - operator!=, 197
  - operator==, 197
  - param\_lbound, 198
  - param\_names, 198
  - param\_ubound, 198
  - params, 198
  - pdf, 199
  - rllh, 199
  - sample, 199
  - scale, 200
  - set\_param, 200
  - set\_params, 201, 202
  - set\_params\_iter, 202
  - set\_scale, 202
  - set\_shape, 203
  - shape, 203
  - ubound, 204
- prior\_hessian::IndexError, 205
  - condition, 207
  - IndexError, 207
  - what, 207
  - what\_, 207
  - what\_str, 207
- prior\_hessian::InvalidOperationError, 208

- condition, 210
- InvalidOperationError, 209
- what, 210
- what\_, 210
- what\_str, 210
- prior\_hessian::MultivariateDist, 218
  - check\_bounds, 219
  - MultivariateDist, 219
- prior\_hessian::MultivariateNormalDist
  - append\_params, 224
  - cdf, 224, 225
  - check\_bounds, 225
  - check\_mu, 225
  - check\_params, 225, 226
  - check\_params\_iter, 227
  - check\_sigma, 228
  - get\_param, 228
  - grad, 228
  - grad2, 229
  - grad\_grad2\_accumulate, 230
  - grad\_hess\_accumulate, 231
  - hess, 231
  - in\_bounds, 232
  - lbound, 233
  - llh, 234
  - mean, 234
  - mode, 235
  - mu, 235
  - MultivariateNormalDist, 223
  - NdimMatT, 222
  - NdimVecT, 222
  - NparamsVecT, 222
  - num\_dim, 236
  - num\_params, 237
  - operator!=, 237
  - operator==, 238
  - param\_lbound, 238
  - param\_names, 239
  - param\_ubound, 239
  - params, 239
  - pdf, 240
  - rllh, 241
  - sample, 242
  - set\_mu, 243
  - set\_params, 243, 244
  - set\_params\_iter, 245
  - set\_sigma, 245
  - sigma, 246
  - sigma\_inv, 246
  - ubound, 247
- prior\_hessian::MultivariateNormalDist< Ndim >, 220
- prior\_hessian::NormalDist, 248
  - append\_params\_iter, 252
  - cdf, 252
  - check\_bounds, 252
  - check\_params, 253
  - check\_params\_iter, 254
  - get\_param, 255
  - grad, 255
  - grad2, 256
  - grad\_grad2\_accumulate, 257
  - icdf, 257
  - in\_bounds, 258
  - lbound, 258
  - llh, 259
  - mean, 259
  - median, 260
  - mu, 260
  - NormalDist, 251
  - NparamsVecT, 250
  - num\_dim, 261
  - num\_params, 261
  - operator!=, 261
  - operator==, 262
  - param\_lbound, 262
  - param\_names, 263
  - param\_ubound, 263
  - params, 263
  - pdf, 264
  - rllh, 264
  - sample, 265
  - set\_mu, 266
  - set\_param, 266
  - set\_params, 267, 268
  - set\_params\_iter, 269
  - set\_sigma, 269
  - sigma, 270
  - ubound, 271
- prior\_hessian::NotImplementedError, 272
  - condition, 274
  - NotImplementedError, 273
  - what, 274
  - what\_, 274
  - what\_str, 274
- prior\_hessian::NumericalOverflowError, 274
  - condition, 276
  - NumericalOverflowError, 275
  - what, 276
  - what\_, 276
  - what\_str, 276
- prior\_hessian::ParameterNameError, 276
  - condition, 278
  - ParameterNameError, 277
  - what, 278
  - what\_, 278
  - what\_str, 278
- prior\_hessian::ParameterNameUniquenessError, 278
  - condition, 280

- ParameterNameUniquenessError, 279
  - what, 280
  - what\_, 280
  - what\_str, 280
- prior\_hessian::ParameterSizeError, 280
  - condition, 282
  - ParameterSizeError, 281
  - what, 282
  - what\_, 282
  - what\_str, 282
- prior\_hessian::ParameterValueError, 282
  - condition, 284
  - ParameterValueError, 283
  - what, 284
  - what\_, 284
  - what\_str, 284
- prior\_hessian::ParetoDist, 284
  - alpha, 287
  - cdf, 288
  - check\_bounds, 289
  - check\_lbound, 290
  - check\_params, 290, 291
  - check\_params\_iter, 292
  - get\_param, 293
  - global\_lbound, 294
  - grad, 294
  - grad2, 295
  - grad\_grad2\_accumulate, 296
  - icdf, 297
  - in\_bounds, 298
  - lbound, 299
  - llh, 301
  - mean, 302
  - median, 304
  - min, 305
  - NparamsVecT, 286
  - num\_dim, 306
  - num\_params, 306
  - operator!=, 306
  - operator==, 307
  - param\_lbound, 307
  - param\_names, 308
  - param\_ubound, 308
  - params, 308
  - ParetoDist, 287
  - pdf, 309
  - rllh, 311
  - sample, 312
  - set\_alpha, 313
  - set\_lbound, 314
  - set\_min, 314
  - set\_param, 315
  - set\_params, 316
  - set\_params\_iter, 317
  - ubound, 318
- prior\_hessian::PriorHessianError, 319
  - condition, 321
  - PriorHessianError, 320
  - what, 321
  - what\_, 321
  - what\_str, 321
- prior\_hessian::RuntimeConvergenceError, 321
  - condition, 323
  - RuntimeConvergenceError, 322
  - what, 323
  - what\_, 323
  - what\_str, 323
- prior\_hessian::RuntimeSamplingError, 323
  - condition, 325
  - RuntimeSamplingError, 324
  - what, 325
  - what\_, 325
  - what\_str, 325
- prior\_hessian::RuntimeTypeError, 325
  - condition, 327
  - RuntimeTypeError, 326
  - what, 327
  - what\_, 327
  - what\_str, 327
- prior\_hessian::ScaledDist
  - \_scaled\_lbound, 343
  - \_scaled\_ubound, 343
  - cdf, 331
  - convert\_from\_unitary\_coords, 331
  - convert\_to\_unitary\_coords, 332
  - global\_lbound, 333
  - global\_ubound, 333
  - icdf, 333
  - lbound, 334
  - llh, 335
  - llh\_scaling\_const, 343
  - mean, 335
  - median, 336
  - operator!=, 336
  - operator==, 337
  - pdf, 337
  - sample, 338
  - ScaledDist, 329, 330
  - scaling\_ratio, 343
  - set\_bounds, 339
  - set\_lbound, 340
  - set\_ubound, 340
  - ubound, 341
  - unscaled\_lbound, 342
  - unscaled\_ubound, 342
- prior\_hessian::ScaledDist< Dist >, 327
- prior\_hessian::SymmetricBetaDist, 344
  - beta, 347

- cdf, [347](#)
- check\_bounds, [348](#)
- check\_params, [348](#)
- check\_params\_iter, [349](#)
- get\_param, [350](#)
- grad, [350](#)
- grad2, [351](#)
- grad\_grad2\_accumulate, [351](#)
- icdf, [352](#)
- in\_bounds, [352](#)
- lbound, [353](#)
- llh, [353](#)
- mean, [354](#)
- median, [354](#)
- NparamsVecT, [346](#)
- num\_dim, [354](#)
- num\_params, [354](#)
- operator!=, [355](#)
- operator==, [355](#)
- param\_lbound, [355](#)
- param\_names, [356](#)
- param\_ubound, [356](#)
- params, [356](#)
- pdf, [357](#)
- rllh, [357](#)
- sample, [357](#)
- set\_beta, [358](#)
- set\_param, [358](#)
- set\_params, [359](#), [360](#)
- set\_params\_iter, [360](#)
- SymmetricBetaDist, [346](#)
- ubound, [361](#)
- prior\_hessian::TruncatedDist
  - \_truncated, [375](#)
  - \_truncated\_lbound, [375](#)
  - \_truncated\_ubound, [376](#)
  - bounds\_pdf\_integral, [376](#)
  - cdf, [366](#)
  - global\_lbound, [366](#)
  - global\_ubound, [366](#)
  - icdf, [367](#)
  - lbound, [367](#)
  - lbound\_cdf, [376](#)
  - llh, [368](#)
  - llh\_truncation\_const, [376](#)
  - mean, [368](#)
  - median, [368](#)
  - min\_bounds\_pdf\_integral, [376](#)
  - num\_params, [369](#)
  - operator!=, [369](#)
  - operator==, [369](#)
  - pdf, [370](#)
  - sample, [370](#)
  - set\_bounds, [371](#)
  - set\_lbound, [372](#)
  - set\_ubound, [373](#)
  - truncated, [374](#)
  - TruncatedDist, [363](#)–[365](#)
  - ubound, [375](#)
- prior\_hessian::TruncatedDist< Dist >, [361](#)
- prior\_hessian::TruncatedMultivariateDist
  - \_truncated, [381](#)
  - \_truncated\_lbound, [381](#)
  - \_truncated\_ubound, [382](#)
  - bounds\_pdf\_integral, [382](#)
  - cdf, [379](#)
  - compute\_truncated\_pdf\_integral, [379](#)
  - global\_lbound, [380](#)
  - global\_ubound, [380](#)
  - in\_bounds, [380](#)
  - lbound, [380](#)
  - lbound\_cdf, [382](#)
  - llh, [380](#)
  - llh\_truncation\_const, [382](#)
  - mean, [380](#)
  - min\_bounds\_pdf\_integral, [382](#)
  - operator!=, [380](#)
  - operator==, [380](#)
  - pdf, [380](#)
  - sample, [381](#)
  - set\_bounds, [381](#)
  - set\_lbound, [381](#)
  - set\_ubound, [381](#)
  - truncated, [381](#)
  - TruncatedMultivariateDist, [379](#)
  - ubound, [381](#)
- prior\_hessian::TruncatedMultivariateDist< Dist >, [377](#)
- prior\_hessian::UnivariateDist, [383](#)
  - check\_bounds, [384](#)
  - num\_dim, [384](#)
  - UnivariateDist, [384](#)
- prior\_hessian::UpperTruncatedDist
  - cdf, [388](#)
  - global\_ubound, [388](#)
  - icdf, [388](#)
  - llh, [389](#)
  - mean, [389](#)
  - median, [389](#)
  - operator!=, [390](#)
  - operator==, [390](#)
  - pdf, [391](#)
  - sample, [391](#)
  - set\_bounds, [392](#)
  - set\_lbound, [392](#)
  - set\_ubound, [393](#)
  - truncated, [394](#)
  - ubound, [394](#)
  - UpperTruncatedDist, [386](#), [387](#)

- prior\_hessian::UpperTruncatedDist< Dist >, 385
- prior\_hessian::constants, 29
  - log2pi, 29
  - sqrt2, 29
  - sqrt2\_inv, 29
  - sqrt2pi, 29
  - sqrt2pi\_inv, 29
- prior\_hessian::detail, 30
  - DistTraitsT, 30
  - eulerian\_polynomial, 30
  - make\_adapted\_bounded\_dist\_tuple, 30, 31
- prior\_hessian::detail::dist\_adaptor\_traits
  - adaptable\_bounds, 172
  - bounds\_adapted\_dist, 171
- prior\_hessian::detail::dist\_adaptor\_traits< CopulaDist← Impl::CopulaDist< CopulaTemplate, DistTs... > >, 172
  - adaptable\_bounds, 173
  - bounds\_adapted\_dist, 172
- prior\_hessian::detail::dist\_adaptor\_traits< Dist >, 171
- prior\_hessian::detail::dist\_adaptor\_traits< GammaDist >, 173
  - adaptable\_bounds, 174
  - bounds\_adapted\_dist, 173
- prior\_hessian::detail::dist\_adaptor\_traits< Multivariate← NormalDist< Ndim > >, 174
  - adaptable\_bounds, 175
  - bounds\_adapted\_dist, 174
- prior\_hessian::detail::dist\_adaptor\_traits< NormalDist >, 175
  - adaptable\_bounds, 176
  - bounds\_adapted\_dist, 175
- prior\_hessian::detail::dist\_adaptor\_traits< ParetoDist >, 176
  - adaptable\_bounds, 177
  - bounds\_adapted\_dist, 176
- prior\_hessian::detail::dist\_adaptor\_traits< Scaled← SymmetricBetaDist >, 177
  - adaptable\_bounds, 178
  - bounds\_adapted\_dist, 177
- prior\_hessian::detail::dist\_adaptor\_traits< Symmetric← BetaDist >, 178
  - adaptable\_bounds, 179
  - bounds\_adapted\_dist, 178
- prior\_hessian::detail::dist\_adaptor\_traits< Truncated← GammaDist >, 179
  - adaptable\_bounds, 180
  - bounds\_adapted\_dist, 179
- prior\_hessian::detail::dist\_adaptor\_traits< Truncated← MultivariateNormalDist< Ndim > >, 180
  - adaptable\_bounds, 181
  - bounds\_adapted\_dist, 180
- prior\_hessian::detail::dist\_adaptor\_traits< Truncated← NormalDist >, 181
  - adaptable\_bounds, 182
  - bounds\_adapted\_dist, 181
- prior\_hessian::detail::dist\_adaptor\_traits< Truncated← ParetoDist >, 182
  - adaptable\_bounds, 183
  - bounds\_adapted\_dist, 182
- prior\_hessian::eulerian\_number< 0, M >, 186
- prior\_hessian::eulerian\_number< N, M >, 185
- prior\_hessian::genz, 32
  - mvn\_cdf\_genz, 32
- prior\_hessian::genz::fortran, 33
  - mvndst\_, 33
- prior\_hessian::helpers, 33
  - compute\_quadratic\_from\_symmetric, 33
- prior\_hessian::mcmc, 34
- prior\_hessian::mcmc::MCMCData
  - MCMCData, 217
  - mutex, 218
  - NdimVecT, 217
  - nsample, 218
  - operator=, 217
  - rllh, 218
  - sample, 218
- prior\_hessian::mcmc::MCMCData< Ndim >, 216
- prior\_hessian::meta, 34
  - call\_in\_order, 40
  - constexpr\_accumulate, 40
  - ConstructableIf, 37
  - ConstructableIfAllAreNotTupleAndAreNotT, 37
  - ConstructableIfAllDistsAreBoundedT, 37
  - ConstructableIfInstantiatedFromNumericT, 37
  - ConstructableIfIsCopulaT, 37
  - ConstructableIfIsSuperClassForAllT, 37
  - ConstructableIfIsSuperClassT, 37
  - ConstructableIfIsTemplateForAllT, 37
  - ConstructableIfNot, 37
  - ConstructableIfNotAllDistsAreBoundedT, 38
  - ConstructableIfNotSelfT, 38
  - DerivedFrom, 38
  - EnableIfAllAreNotTupleT, 38
  - EnableIfInstantiatedFromNumericT, 38
  - EnableIfInstantiatedFromT, 38
  - EnableIfIsNotTupleAndIsNotSelfT, 38
  - EnableIfIsNotTupleT, 38
  - EnableIfIsSuperclassOfAllT, 38
  - EnableIfIsTemplateForAllT, 39
  - EnableIfNonEmpty, 39
  - EnableIfNotInstantiatedFromT, 39
  - EnableIfNotIsSelfT, 39
  - EnableIfSubclassOfNumericTemplateT, 39
  - EnableIfSubclassT, 39
  - logical\_and\_in\_order, 41
  - prod\_in\_order, 41
  - ReturnIfInstantiatedFromNumericT, 39

- ReturnIfInstantiatedFromT, [39](#)
- ReturnIfNotInstantiatedFromT, [39](#)
- ReturnIfSubclassOfNumericTemplateT, [40](#)
- ReturnIfSubclassT, [40](#)
- ReturnIfT, [40](#)
- sum\_in\_order, [42](#)
- prior\_hessian::meta::all\_dists\_are\_bounded
  - value, [46](#)
- prior\_hessian::meta::all\_dists\_are\_bounded< DistTs >, [45](#)
- prior\_hessian::meta::conjunction< B1 >, [135](#)
- prior\_hessian::meta::conjunction< B1, Bn... >, [136](#)
- prior\_hessian::meta::conjunction<... >, [134](#)
- prior\_hessian::meta::disjunction< B1 >, [169](#)
- prior\_hessian::meta::disjunction< B1, Bn... >, [170](#)
- prior\_hessian::meta::disjunction<... >, [168](#)
- prior\_hessian::meta::is\_copula
  - value, [211](#)
- prior\_hessian::meta::is\_copula< T, U >, [210](#)
- prior\_hessian::meta::is\_numeric\_template\_of< class, typename >, [211](#)
- prior\_hessian::meta::is\_numeric\_template\_of< Class↔ NumericTemplate, ClassNumericTemplate< Is... > >, [212](#)
- prior\_hessian::meta::is\_subclass\_of\_numeric\_template
  - value, [214](#)
- prior\_hessian::meta::is\_subclass\_of\_numeric\_template< T, U >, [213](#)
- prior\_hessian::meta::is\_template\_of< class, typename >, [214](#)
- prior\_hessian::meta::is\_template\_of< ClassTemplate, ClassTemplate< Ts... > >, [215](#)
- prior\_hessian::polylog, [43](#)
  - eulerian\_polynomial, [43](#)
  - eulerian\_polynomial< 0 >, [43](#)
  - eulerian\_polynomial< 1 >, [43](#)
  - eulerian\_polynomial< 2 >, [43](#)
  - eulerian\_polynomial< 3 >, [43](#)
  - eulerian\_polynomial< 4 >, [44](#)
  - eulerian\_polynomial< 5 >, [44](#)
  - eulerian\_polynomial< 6 >, [44](#)
  - eulerian\_polynomial< 7 >, [44](#)
  - eulerian\_polynomial< 8 >, [44](#)
  - eulerian\_polynomial< 9 >, [44](#)
  - polylog, [44](#)
  - polylog< 1 >, [45](#)
- PriorHessianError
  - prior\_hessian::PriorHessianError, [320](#)
- PriorHessianError.h, [422](#)
  - ASSERT\_SETUP, [424](#)
  - DEBUG\_ASSERT, [424](#)
- prod\_in\_order
  - prior\_hessian::meta, [41](#)
- README.md, [424](#)
- rename\_dim\_variable
  - prior\_hessian::CompositeDist, [123](#)
- rename\_param
  - prior\_hessian::CompositeDist, [124](#)
- ReturnIfInstantiatedFromNumericT
  - prior\_hessian::meta, [39](#)
- ReturnIfInstantiatedFromT
  - prior\_hessian::meta, [39](#)
- ReturnIfNotInstantiatedFromT
  - prior\_hessian::meta, [39](#)
- ReturnIfSubclassOfNumericTemplateT
  - prior\_hessian::meta, [40](#)
- ReturnIfSubclassT
  - prior\_hessian::meta, [40](#)
- ReturnIfT
  - prior\_hessian::meta, [40](#)
- rllh
  - prior\_hessian::AMHCopula, [59](#)
  - prior\_hessian::CompositeDist, [124](#)
  - prior\_hessian::CopulaDistImpl::CopulaDist, [154](#)
  - prior\_hessian::GammaDist, [199](#)
  - prior\_hessian::MultivariateNormalDist, [241](#)
  - prior\_hessian::NormalDist, [264](#)
  - prior\_hessian::ParetoDist, [311](#)
  - prior\_hessian::SymmetricBetaDist, [357](#)
  - prior\_hessian::mcmc::MCMCData, [218](#)
- rllh\_components
  - prior\_hessian::CompositeDist, [125](#)
- rllh\_const
  - prior\_hessian::AMHCopula, [59](#)
- rllh\_d2theta\_accumulate
  - prior\_hessian::AMHCopula, [60](#)
- rllh\_dtheta\_accumulate
  - prior\_hessian::AMHCopula, [60](#)
- rllh\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist↔ Adaptor< Dist, meta::EnableIfSubclassT< Dist, MultivariateDist > >, [76](#)
  - prior\_hessian::CompositeDist::ComponentDist↔ Adaptor< Dist, meta::EnableIfSubclassT< Dist, UnivariateDist > >, [87](#)
- rllh\_grad\_accumulate
  - prior\_hessian::AMHCopula, [60](#)
- rllh\_grad\_grad2\_accumulate
  - prior\_hessian::AMHCopula, [61](#)
- rllh\_grad\_hess\_accumulate
  - prior\_hessian::AMHCopula, [61](#)
- RuntimeConvergenceError
  - prior\_hessian::RuntimeConvergenceError, [322](#)
- RuntimeSamplingError
  - prior\_hessian::RuntimeSamplingError, [324](#)
- RuntimeTypeError
  - prior\_hessian::RuntimeTypeError, [326](#)



- sample
  - prior\_hessian::AMHCopula, 61
  - prior\_hessian::CompositeDist, 126, 127
  - prior\_hessian::CopulaDistImpl::CopulaDist, 154
  - prior\_hessian::GammaDist, 199
  - prior\_hessian::MultivariateNormalDist, 242
  - prior\_hessian::NormalDist, 265
  - prior\_hessian::ParetoDist, 312
  - prior\_hessian::ScaledDist, 338
  - prior\_hessian::SymmetricBetaDist, 357
  - prior\_hessian::TruncatedDist, 370
  - prior\_hessian::TruncatedMultivariateDist, 381
  - prior\_hessian::UpperTruncatedDist, 391
  - prior\_hessian::mcmc::MCMCData, 218
- scale
  - prior\_hessian::GammaDist, 200
- ScaledDist
  - prior\_hessian::ScaledDist, 329, 330
- ScaledDist.h, 424
- ScaledSymmetricBetaDist
  - prior\_hessian, 14
- ScaledSymmetricBetaDist.h, 425
- scaling\_ratio
  - prior\_hessian::ScaledDist, 343
- set\_alpha
  - prior\_hessian::ParetoDist, 313
- set\_beta
  - prior\_hessian::SymmetricBetaDist, 358
- set\_bounds
  - prior\_hessian::CompositeDist, 127
  - prior\_hessian::CopulaDistImpl::CopulaDist, 155
  - prior\_hessian::ScaledDist, 339
  - prior\_hessian::TruncatedDist, 371
  - prior\_hessian::TruncatedMultivariateDist, 381
  - prior\_hessian::UpperTruncatedDist, 392
- set\_bounds\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, 76
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, 87
- set\_component\_names
  - prior\_hessian::CompositeDist, 128
- set\_copula\_theta
  - prior\_hessian::CopulaDistImpl::CopulaDist, 155
- set\_dim\_variables
  - prior\_hessian::CompositeDist, 129
- set\_lbound
  - prior\_hessian::CompositeDist, 129
  - prior\_hessian::CopulaDistImpl::CopulaDist, 156
  - prior\_hessian::ParetoDist, 314
  - prior\_hessian::ScaledDist, 340
  - prior\_hessian::TruncatedDist, 372
- prior\_hessian::TruncatedMultivariateDist, 381
- prior\_hessian::UpperTruncatedDist, 392
- set\_lbound\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, 77
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, 88
- set\_min
  - prior\_hessian::ParetoDist, 314
- set\_mu
  - prior\_hessian::MultivariateNormalDist, 243
  - prior\_hessian::NormalDist, 266
- set\_param
  - prior\_hessian::GammaDist, 200
  - prior\_hessian::NormalDist, 266
  - prior\_hessian::ParetoDist, 315
  - prior\_hessian::SymmetricBetaDist, 358
- set\_param\_names
  - prior\_hessian::CompositeDist, 130
- set\_param\_value
  - prior\_hessian::CompositeDist, 131
- set\_params
  - prior\_hessian::AMHCopula, 62
  - prior\_hessian::CompositeDist, 132
  - prior\_hessian::CopulaDistImpl::CopulaDist, 157
  - prior\_hessian::GammaDist, 201, 202
  - prior\_hessian::MultivariateNormalDist, 243, 244
  - prior\_hessian::NormalDist, 267, 268
  - prior\_hessian::ParetoDist, 316
  - prior\_hessian::SymmetricBetaDist, 359, 360
- set\_params\_iter
  - prior\_hessian::AMHCopula, 62
  - prior\_hessian::CopulaDistImpl::CopulaDist, 157
  - prior\_hessian::GammaDist, 202
  - prior\_hessian::MultivariateNormalDist, 245
  - prior\_hessian::NormalDist, 269
  - prior\_hessian::ParetoDist, 317
  - prior\_hessian::SymmetricBetaDist, 360
- set\_scale
  - prior\_hessian::GammaDist, 202
- set\_shape
  - prior\_hessian::GammaDist, 203
- set\_sigma
  - prior\_hessian::MultivariateNormalDist, 245
  - prior\_hessian::NormalDist, 269
- set\_theta
  - prior\_hessian::AMHCopula, 63
- set\_ubound
  - prior\_hessian::CompositeDist, 132
  - prior\_hessian::CopulaDistImpl::CopulaDist, 157
  - prior\_hessian::ScaledDist, 340
  - prior\_hessian::TruncatedDist, 373



- prior\_hessian::TruncatedMultivariateDist, 381
- prior\_hessian::UpperTruncatedDist, 393
- set\_ubound\_from\_iter
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
MultivariateDist > >, 77
  - prior\_hessian::CompositeDist::ComponentDist↔  
Adaptor< Dist, meta::EnableIfSubclassT< Dist,  
UnivariateDist > >, 88
- shape
  - prior\_hessian::GammaDist, 203
- sigma
  - prior\_hessian::MultivariateNormalDist, 246
  - prior\_hessian::NormalDist, 270
- sigma\_inv
  - prior\_hessian::MultivariateNormalDist, 246
- sqrt2
  - prior\_hessian::constants, 29
- sqrt2\_inv
  - prior\_hessian::constants, 29
- sqrt2pi
  - prior\_hessian::constants, 29
- sqrt2pi\_inv
  - prior\_hessian::constants, 29
- square
  - prior\_hessian, 27
- StringVecT
  - prior\_hessian, 15
- sum\_d10\_igen\_u
  - prior\_hessian::ArchimedeanCopula::D2Theta\_I↔  
GenTerms, 165
  - prior\_hessian::ArchimedeanCopula::DTheta\_I↔  
GenTerms, 184
- sum\_d20\_igen\_u
  - prior\_hessian::ArchimedeanCopula::D2Theta\_I↔  
GenTerms, 165
- sum\_ieta\_01\_11\_u
  - prior\_hessian::ArchimedeanCopula::D2Theta\_I↔  
GenTerms, 165
  - prior\_hessian::ArchimedeanCopula::DTheta\_I↔  
GenTerms, 184
- sum\_in\_order
  - prior\_hessian::meta, 42
- sum\_ixi\_01\_u
  - prior\_hessian::ArchimedeanCopula::D2Theta\_I↔  
GenTerms, 165
- sum\_log\_d1\_igen\_u
  - prior\_hessian::ArchimedeanCopula::D2Theta\_I↔  
GenTerms, 165
  - prior\_hessian::ArchimedeanCopula::DTheta\_I↔  
GenTerms, 185
- SymmetricBetaDist
  - prior\_hessian::SymmetricBetaDist, 346
- SymmetricBetaDist.cpp, 426
- SymmetricBetaDist.h, 427
- theta
  - prior\_hessian::AMHCopula, 64
- truncated
  - prior\_hessian::TruncatedDist, 374
  - prior\_hessian::TruncatedMultivariateDist, 381
  - prior\_hessian::UpperTruncatedDist, 394
- TruncatedDist
  - prior\_hessian::TruncatedDist, 363–365
- TruncatedDist.h, 429
- TruncatedGammaDist
  - prior\_hessian, 15
- TruncatedGammaDist.h, 430
- TruncatedMultivariateDist
  - prior\_hessian::TruncatedMultivariateDist, 379
- TruncatedMultivariateDist.h, 431
- TruncatedMultivariateNormalDist
  - prior\_hessian, 15
- TruncatedMultivariateNormalDist.h, 433
- TruncatedNormalDist
  - prior\_hessian, 15
- TruncatedNormalDist.h, 434
- TruncatedParetoDist
  - prior\_hessian, 15
- TruncatedParetoDist.h, 435
- TypeInfoVecT
  - prior\_hessian, 15
- UVecT
  - prior\_hessian, 15
- ubound
  - prior\_hessian::CompositeDist, 133
  - prior\_hessian::CopulaDistImpl::CopulaDist, 158
  - prior\_hessian::GammaDist, 204
  - prior\_hessian::MultivariateNormalDist, 247
  - prior\_hessian::NormalDist, 271
  - prior\_hessian::ParetoDist, 318
  - prior\_hessian::ScaledDist, 341
  - prior\_hessian::SymmetricBetaDist, 361
  - prior\_hessian::TruncatedDist, 375
  - prior\_hessian::TruncatedMultivariateDist, 381
  - prior\_hessian::UpperTruncatedDist, 394
- unit\_normal\_cdf
  - prior\_hessian, 27
- unit\_normal\_icdf
  - prior\_hessian, 28
- UnivariateDist
  - prior\_hessian::UnivariateDist, 384
- UnivariateDist.cpp, 436
- UnivariateDist.h, 437
- unscaled\_lbound
  - prior\_hessian::ScaledDist, 342
- unscaled\_ubound
  - prior\_hessian::ScaledDist, 342

UpperTruncatedDist  
  prior\_hessian::UpperTruncatedDist, [386](#), [387](#)  
UpperTruncatedDist.h, [438](#)  
util.cpp, [439](#)  
util.h, [441](#)

value  
  prior\_hessian::meta::all\_dists\_are\_bounded, [46](#)  
  prior\_hessian::meta::is\_copula, [211](#)  
  prior\_hessian::meta::is\_subclass\_of\_numeric\_↔  
    template, [214](#)

VecT  
  prior\_hessian, [15](#)

what  
  prior\_hessian::IndexError, [207](#)  
  prior\_hessian::InvalidOperationError, [210](#)  
  prior\_hessian::NotImplementedError, [274](#)  
  prior\_hessian::NumericalOverflowError, [276](#)  
  prior\_hessian::ParameterNameError, [278](#)  
  prior\_hessian::ParameterNameUniquenessError,  
    [280](#)  
  prior\_hessian::ParameterSizeError, [282](#)  
  prior\_hessian::ParameterValueError, [284](#)  
  prior\_hessian::PriorHessianError, [321](#)  
  prior\_hessian::RuntimeConvergenceError, [323](#)  
  prior\_hessian::RuntimeSamplingError, [325](#)  
  prior\_hessian::RuntimeTypeError, [327](#)

what\_  
  prior\_hessian::IndexError, [207](#)  
  prior\_hessian::InvalidOperationError, [210](#)  
  prior\_hessian::NotImplementedError, [274](#)  
  prior\_hessian::NumericalOverflowError, [276](#)  
  prior\_hessian::ParameterNameError, [278](#)  
  prior\_hessian::ParameterNameUniquenessError,  
    [280](#)  
  prior\_hessian::ParameterSizeError, [282](#)  
  prior\_hessian::ParameterValueError, [284](#)  
  prior\_hessian::PriorHessianError, [321](#)  
  prior\_hessian::RuntimeConvergenceError, [323](#)  
  prior\_hessian::RuntimeSamplingError, [325](#)  
  prior\_hessian::RuntimeTypeError, [327](#)

what\_str  
  prior\_hessian::IndexError, [207](#)  
  prior\_hessian::InvalidOperationError, [210](#)  
  prior\_hessian::NotImplementedError, [274](#)  
  prior\_hessian::NumericalOverflowError, [276](#)  
  prior\_hessian::ParameterNameError, [278](#)  
  prior\_hessian::ParameterNameUniquenessError,  
    [280](#)  
  prior\_hessian::ParameterSizeError, [282](#)  
  prior\_hessian::ParameterValueError, [284](#)  
  prior\_hessian::PriorHessianError, [321](#)  
  prior\_hessian::RuntimeConvergenceError, [323](#)  
  prior\_hessian::RuntimeSamplingError, [325](#)  
  prior\_hessian::RuntimeTypeError, [327](#)

xi\_On\_t  
  prior\_hessian::ArchimedeanCopula::D2Theta\_↔  
    GenTerms, [164](#)

xi\_n\_t  
  prior\_hessian::ArchimedeanCopula::D2\_GenTerms,  
    [161](#)